


LINEAR HIGH BAY Series



FEATURES

Voltage Range	120-277 VAC
Frequency Range	50 ~ 60 Hz
THD	>20%(@230 VAC max. Load)
Lifetime	>100 000 h
Efficiency	> 130 lm/W
Installation	Top Access to Compartment Ceiling Mount
Operating Temperature	-40°C ~ 50 °C
Power Factor	>0.92

DIMENSIONS

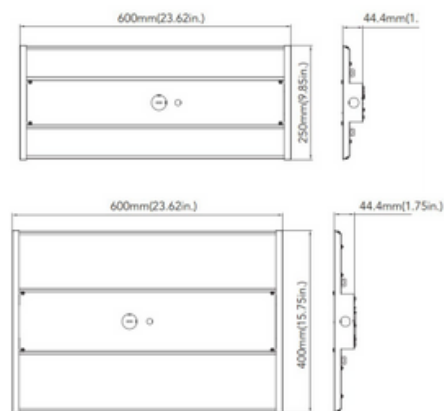

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
MLF02 Serie 1	35W	12D 120°	40K 4000K	7 70	27RE 100-277 VAC	SE Sensor	W White
	45W		50K 5000K			EB Emergency Battery	