



ORBIS Series



FEATURES

Voltage range	120 VAC
Frequency range	50 ~ 60 Hz
Dimming	Dim. TRIAC
Efficacy	100 lm/W
Lifetime	>100,000hrs@L70B30 Ta=+25 °C
Operative Temperature	-10°C ~ +40 °C
Mounting	Surfaced / Pendant

DIMENSIONS

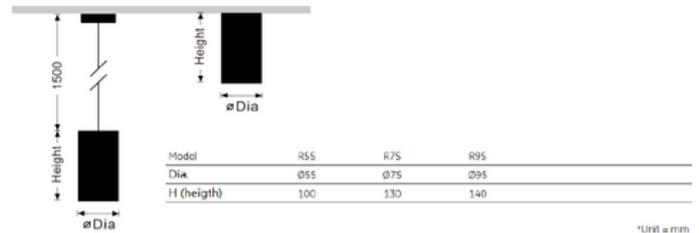

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
ORB55 Serie 1	Φ55x100 7W	15°	30K 3000K	8 80	12RE 120 VAC Dim. TRIAC	PMA Pendant Mount Accessories	WW White & White
ORB75 Serie 1	Φ75x130 12W	30°	40K 4000K	9 90		** On Request	WB White & Black
ORB95 Serie 1	Φ95x140 18W	45°	50K 5000K				BB Black & Black
							BW Black & White

On Request