



RING IN Series

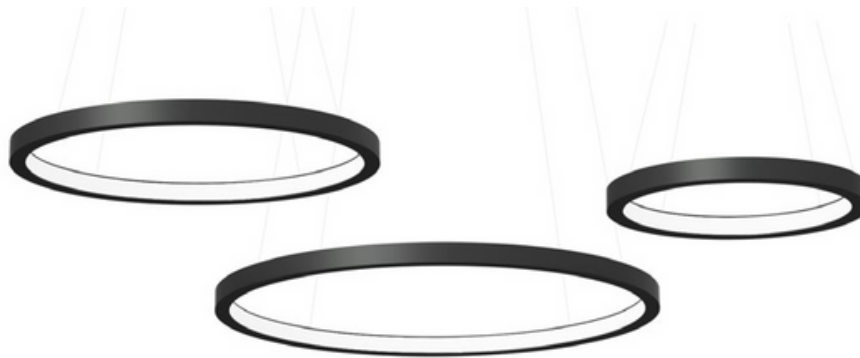

FEATURES

Voltage Range	120 ~ 277 VAC
Frequency Range	50 ~ 60 Hz
Power Factor	Dimmable 1 - 10 V.
Efficiency	110 lm/W
Lifetime	> 50 000 h
Operating Temperature	-40 C° ~ 40 C°
Installation	Pendant

DIMENSIONS

WIDTH	DIAMETER (INCH)	W	LM/W	LM
1.6"	Φ24" (60cm)	24	100	2,400
	Φ32" (80cm)	32	100	3,200
	Φ40" (100cm)	40	100	4,000
	Φ47" (120cm)	48	100	4,800
	Φ59" (150cm)	60	100	6,000
	Φ71" (180cm)	72	100	7,200

CONFIGURATIONS

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
RIN40S Ring Inner Series - 40"	24W	120D 120°	30K 3000K	8 80	27PR 120-277 VAC Dim. 0-10 V.	** On Request	WH White RAL 9016
	32W		35K 3500K				BK Black RAL 9017
	40W		40K 4000K				** On Request
	48W						
	60W						
	72W						