


BRICKELL Series




FEATURES


Voltage Range	120 ~ 277 VAC
Frequency Range	50 ~ 60 Hz
Power Factor	>0,95
Regulation System	Dimmable 1-10V, PWM
Efficiency	>140 lm/W
Lifetime	>100 000 h
Operating Temperature	-30°C ~ 45 °C
Installation	Ceiling Mount

DIMENSIONS

Size: 100W/135W

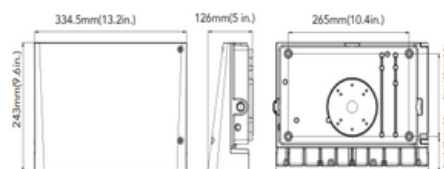

Size: 26W/38W/65W

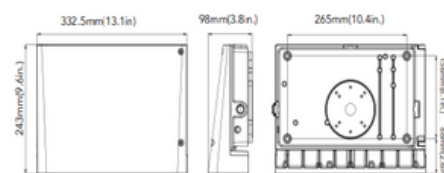

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR	TREATMENT
WP15 Serie 1	26W	PC Series 1	30K 3000K	7 70	27RE 120-277 VAC Dim. 0-10V	PH Photocell	BZ Bronze	A2 250h AISI 304
	38W		40K 4000K			EB Emergency Battery	.. On Request	
	65W		50K 5000K					
	100W							
	135W							

REFERENCES

References	4000K	
	Lumens	lm / w
BRK01-65WPc-40K7-27RE-EB-BZ (65,38,26W)	> 9100	> 140
BRK01-135WPc-40K7-27RE-EB-BZ (135,100W)	> 18900	> 140



Miami, USA: 7825 NW 29th St. Suite 121, 33122

Monterrey, MÉXICO: Plaza 100 - Lg. Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254.

Lima, PERÚ: Av República De Colombia 643, ofic. 1201, San Isidro, Lima, Perú

email: info@moovillum.com