


LOLO Series



FEATURES

Voltage Range	120 ~ 277 VAC
Frequency Range	50 ~ 60 Hz
Regulation System	Dimmable 1 - 10 V, PWM
Efficiency	140 lm/W
Lifetime	> 100 000 h
Operating Temperature	-40 C° ~ 40 C°
Installation	Post Top

DIMENSIONS

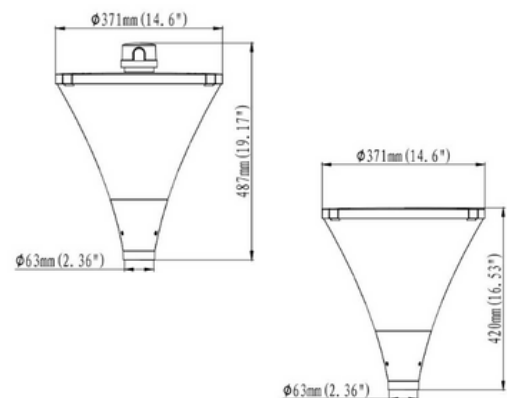

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	SPD	CLASS	RAL COLOR	TREATMENT
LOL Serie 1	18W	201	30K 3000K	7 70	27PR 120-277 VAC Dimmable	C1 Liss Cover	10S	1 Class I	B Black	A2 250h AISI 304
	30W	202	40K 4000K			S3 Socket 3 pins		2 Class II		
	45W	203	50K 5000K			S7 Socket 7 pins				
	60W	204								
		205								
		207								