


IKON Series



FEATURES

Voltage Range	120 ~ 277 VAC
Frequency Range	50 ~ 60 Hz
Regulation System	1 - 10 V, PWM
Efficiency	>75 lm/W
Lifetime	>100 000 h
Operating Temperature	-40 C° ~ 40 C°
Installation	Post Top

DIMENSIONS

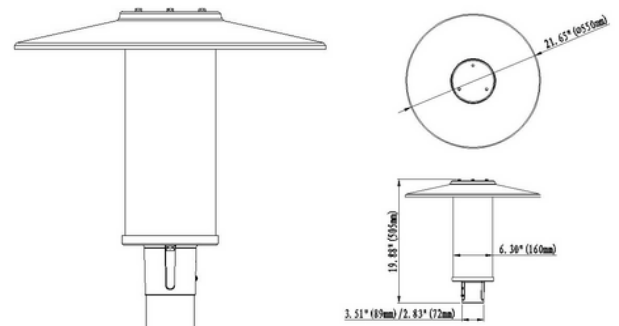

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	SPD	CLASS	RAL COLOR	TREATMENT
IK1 Serie 1	20W	402	30K 3000K	7 70	27PR 120-277 VAC Dimmable.	CL Liss Cover	10kV	1 Class I	C Grey	A2 250h AISI 304
	30W		40K 4000K						W White	
	40W		50K 5000K						B Black	