



MARKET Series



FEATURES

Voltage Range	120 ~ 277 VAC
Frequency Range	50 ~ 60 Hz
Power Factor	>0,92
SPD	6kV Line-to-Line, 10kV Line-to-Ground
Control	Dimmable, DALI
Efficiency	>145 lm/W
Lifetime	>76 000 h
Operating Temperature	-40°C ~ 50 °C
Installation	Ceiling Mount / Loop Mount

DIMENSIONS

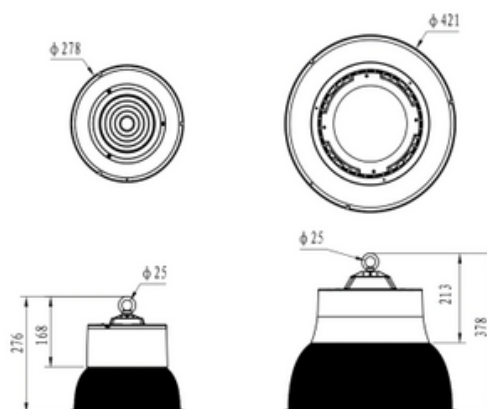

CONFIGURATION

MODEL	POWER	OPT.	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
MK1 Serie 1	50W	60°	30K 3000K	8 80	27RE 100-277 VAC Dim. 0-10V.	EB Emergency Battery	WH White
	100W	90	40K 4000K			SE Sensor	
	150W	120	50K 5000K				