



MILAN Series



FEATURES

Voltage Range	220 ~ 240 VAC
Frequency Range	50 ~ 60 Hz
Dimming	Dimmable 1 - 10 V, PWM, DALI, DALI2/D4i
Efficiency	150 lm/W
Operating Temperature	-40°C ~ 50°C
Lifetime	100Khrs@L90B10
Installation	Top Access

DIMENSIONS

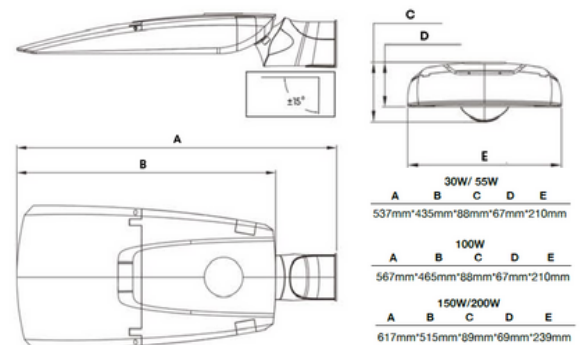

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESORIES	SPD	CLASS	RAL COLOR	TREATMENT
MLN1 Serie 1	30W	201	30K 3000K	7 70	27PR 100-277 VAC Dimmable. 0-10 V	C1 Liss Cover	10S 10 kV	1 Class I	W White	A2 250h AISI 304
	55W	202	40K 4000K	8 80	22PR 200-240 VAC Dimmable. DALI D4i	S3 Socket 3 pins	15S 15 kV	2 Class II	G Grey	A4 250h AISI 316
	100W	211				S7 Socket 7 pins	20S 20 kV		.. On Request	B2 500h AISI 304
	150W	221								B4 500h AISI 316
	200W	301								.. On Request