


PARK Series



FEATURES

Voltage Range	120 ~ 277 VAC
Frequency Range	50 ~ 60 Hz
Regulation System	Dimmable 1 - 10 V, PWM
Efficiency	>130 lm/W
Lifetime	> 100 000 h
Operating Temperature	-40 C° ~ 40 C°
Installation	Post Top

DIMENSIONS

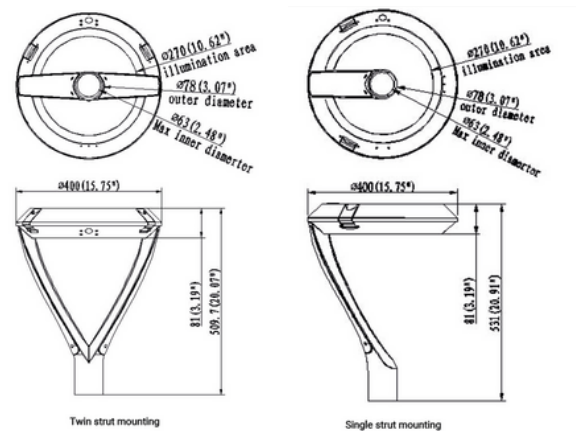

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	SPD	CLASS	RAL COLOR	TREATMENT
PRK01 Serie 1	30W	GP	40K 4000K	7 70	27PR 120-277 VAC Dimmable.	CL Liss Cover	10S	1 Class I	BZ Bronze RAL 7013	A2 250h AISI 304
	50W	V	50K 5000K	8 80		S3 socket 3 pines		2 Class II		** On Request
	60W									