



STADIUM Series

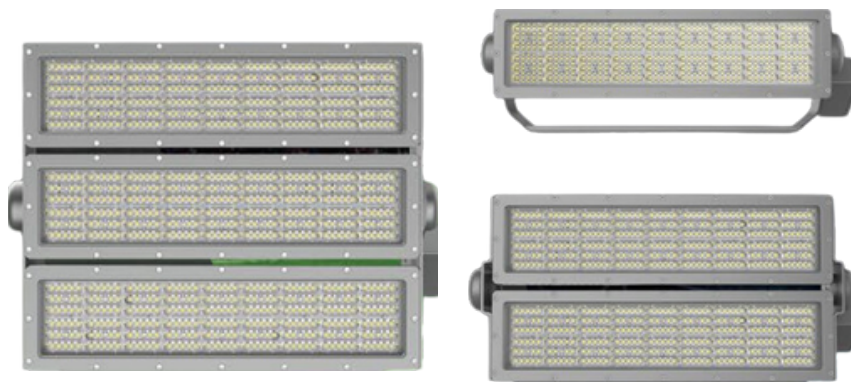

FEATURES

Voltage Range	100 - 240V / 200 - 440V / 198 - 440V
Frequency Range	50 ~ 60 Hz
Power Factor	> 0.90
Efficiency	>140 lm/W
Lifetime	52khrs@L90B10
Operating Temperature	-40°C to 50°C

DIMENSIONS

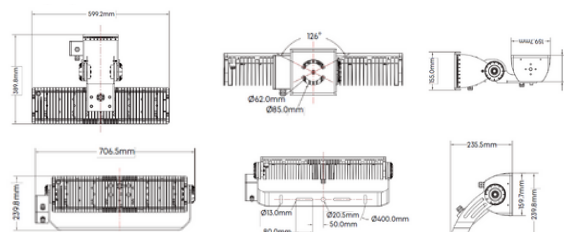

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	SPD	ACCESSORIES	CLASS	RAL COLOR	TREATMENT
STADIUM Series	400W	15D	27K 2700K	7 70	27PR 100-277VACProg.0-10V/PWM dimming (Standard), DALI, (Optional)	20S 20Kv	Reflector	Type A	SL Silver RAL 9023	** On Request
	600W	30D	30K 3000K	8 80			Lens Viewer	Type U	BK Black RAL 9005	
	800W	20*30D	35K 3500K	9 90			Power Supply Split Installation			
	1200W	35*85D	40K 4000K				Driver Box Integrated with Bracket			
	1500W	PG30D	50K 5000K							
	1800W	PG60D								