

URBAN Series




FEATURES

Voltage Range	100 ~ 277 VAC
Frequency Range	50 ~ 60 Hz
Regulation System	0 - 10 V. PWM
Efficiency	>120 lm/W
Lifetime	>50 000 h
Operating Temperature	-40 C° ~ 55 C°
Installation	Post Top

DIMENSIONS

25.20"x24.25"x2.76"

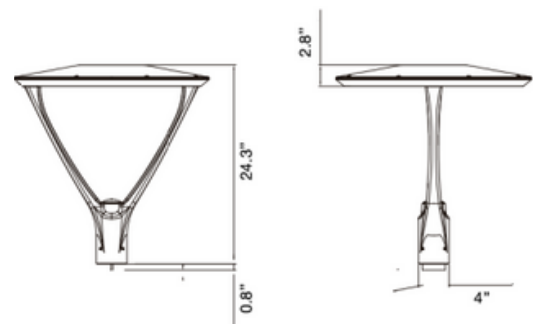

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	SPD	CLASS	RAL COLOR	TREATMENT
UB01 Serie 1	45W	GP	30 k 3000 k	7 70	27PR 120-277 VAC Dimmable.	CL Liss Cover	10S	1 Class I	W White	A2 250h AISI 304
	70W	V	40 k 4000 k	8 80		S3 socket 3 pins		2 Class II	BZ Bronze	** On Request
	87W		50 k 5000 k							
	130W									