


MADRID Series



FEATURES

Voltage Range	120 ~ 277 VAC
Frequency Range	50 ~ 60 Hz
Regulation System	Dimmable 1 - 10 V, PWM
Efficiency	>140 lm/W
Lifetime	> 100 000 h
Operating Temperature	-40 C° ~ 40 C°
Installation	Post Top

DIMENSIONS

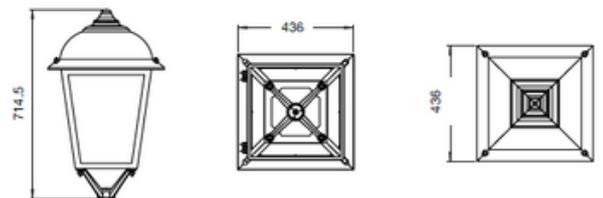

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	SPD	CLASS	RAL COLOR	TREATMENT
MDR1 Serie 1	40W	401	30K 3000K	7 70	27PR 100-277 VAC Dimmable 0-10 V, PWM	N/A	PID 10 kV	1 Clase I	B Black	A2 250h AISI 304
	60W		40K 4000K	8 80			15S 15 kV	2 Class II	.. On Request	A4 250h AISI 316
	80W		SK 30K/40K							B2 500h AISI 304
										B4 500h AISI 316