

moovilum
light in *motion*

CATALOG 2026



ABOUT OUR PROJECTS

What Do We Do?


We deliver comprehensive lighting solutions that cover every stage of the project: from specialized consultancy and design, through engineering and implementation, to post-sales support and maintenance.

By integrating intelligent lighting technology, we optimize performance, adapt illumination to each space and its specific needs, and significantly reduce energy consumption and operating costs. Our approach ensures projects that are not only efficient, but also reliable, scalable, and aligned with the highest quality standards.



OFFICES AND FACTORIES

Global Presence & Proven Track Record

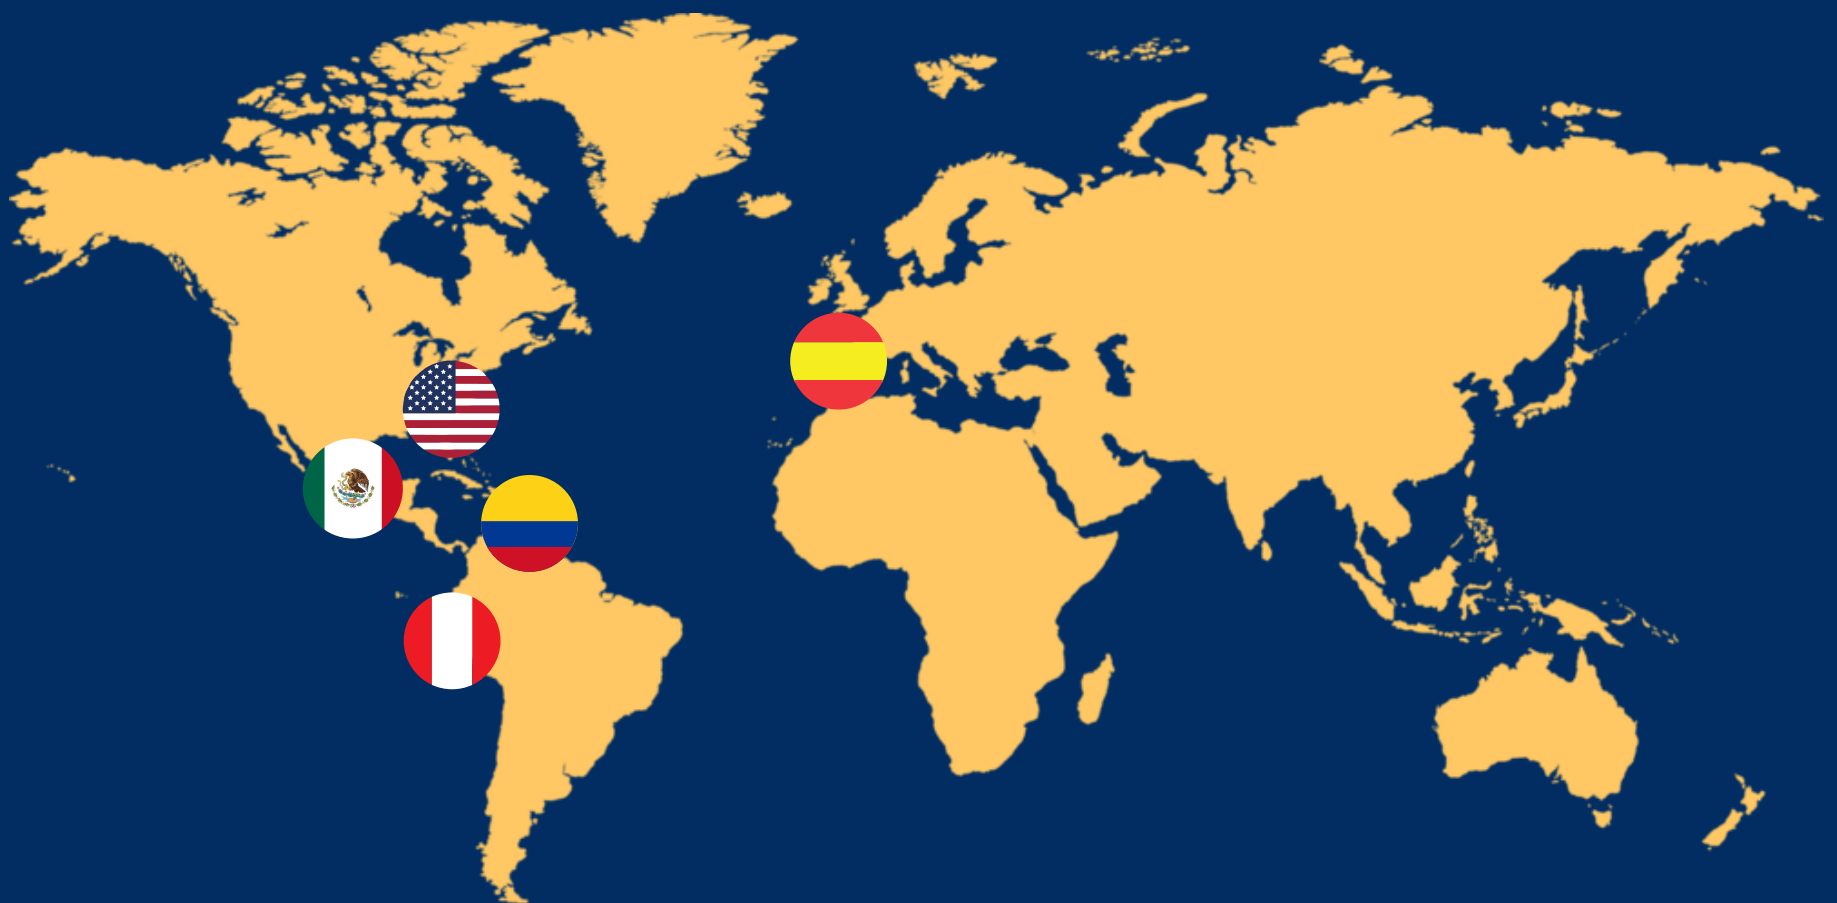

Our prestigious achievements in international lighting projects are a testament to our experience and technical expertise. We have successfully developed and implemented solutions in diverse markets and regulatory environments, which strengthens our capacity to respond to complex challenges.

Today, we maintain an active presence in the **USA, Spain, Peru, Mexico, and Colombia**, positioning us as a reliable global partner for high-demand lighting projects.



ABOUT THE COMPANY


Our Certifications

We hold certifications that endorse our excellence and commitment to quality in every stage of our work. These recognitions reflect our adherence to strict technical, safety, and performance standards, both in our processes and in our luminaires.

Thanks to these national and international certifications, we provide our customers with the confidence that they are acquiring reliable, high-quality lighting products, backed by globally recognized norms and best practices.




SURF Series

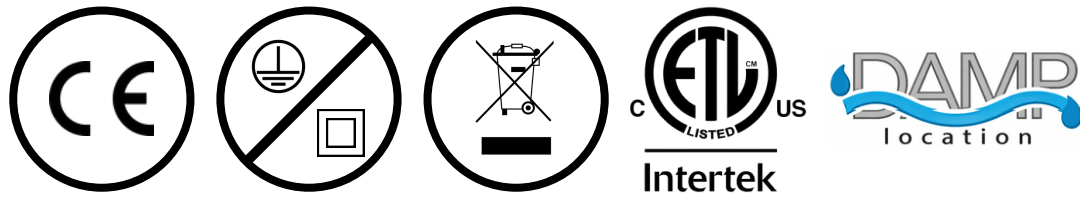

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	$\geq 700 \text{ lm} \sim 1500 \text{ lm}$
Efficiency	$\geq 65 \text{ lm/W} \sim 70 \text{ lm/W}$
Dimming	TRIAC
Lifetime	$\geq 50\,000 \text{ Hours}$
Mounting	Surface

DIMENSIONS:

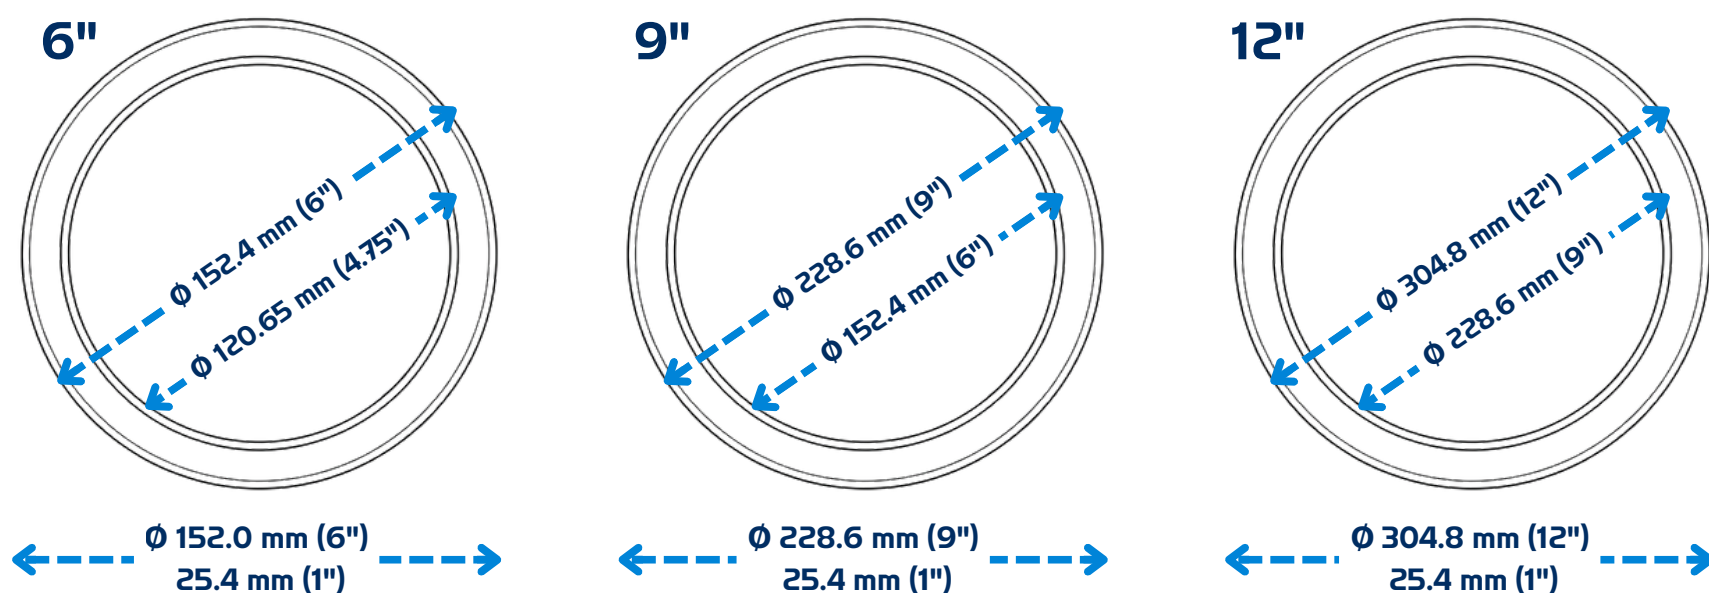

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
SRF6 6 Inches	10W	120D 120°	3CCT 30K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	EB Emergency Battery	W White
SRF9 9 Inches	18W					N/A	B Black
SRF12 12 Inches	22W						** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
SRF6-10W-120D-3CCTK8-12RE-W	≥ 700	≥ 70
SRF9-18W-120D-3CCTK8-12RE-W	≥ 1 200	≥ 70
SRF12-22W-120D-3CCTK8-12RE-W	≥ 1 500	≥ 70



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


NOVA Series

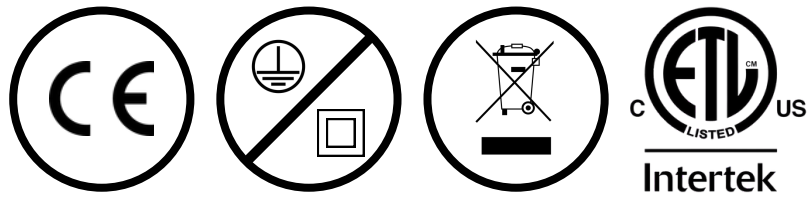

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 650 lm ~ 900 lm
Efficiency	≥ 60 lm/W ~ 65 lm/W
Dimming	TRIAC
Lifetime	≥ 50,000 Hours
Mounting	Surface

DIMENSIONS:

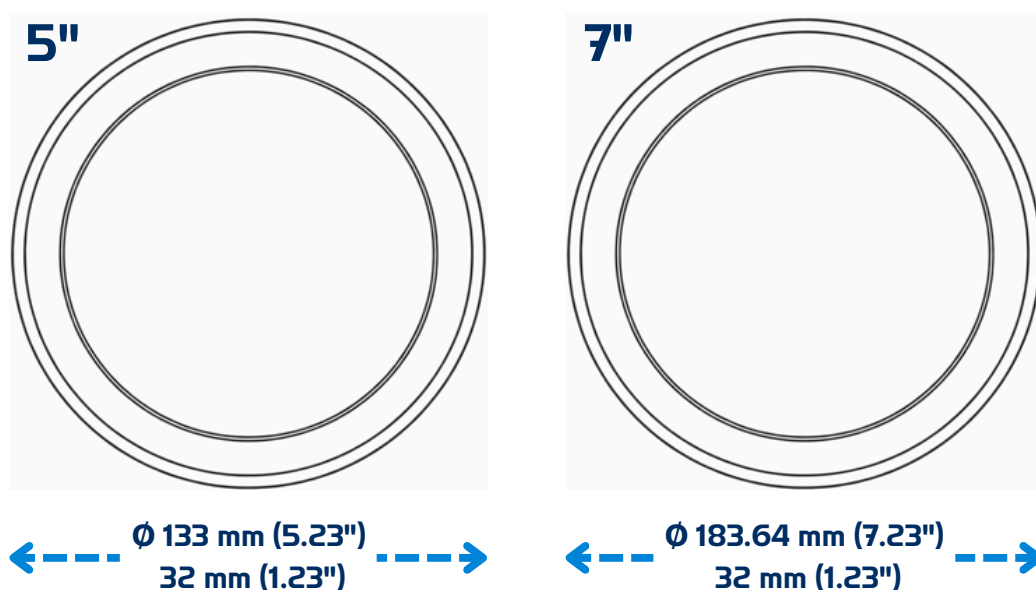

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
NVA5 5 Inches	10W	120D 120°	5CCT 27K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	W White
NVA7 7 Inches	15W						B Black
							** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
NVA5-10W-120D-5CCTK8-12RE-W	≥ 650	≥ 65
NVA7-15W-120D-5CCTK8-12RE-W	≥ 900	≥ 65



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com



MOCCA Series

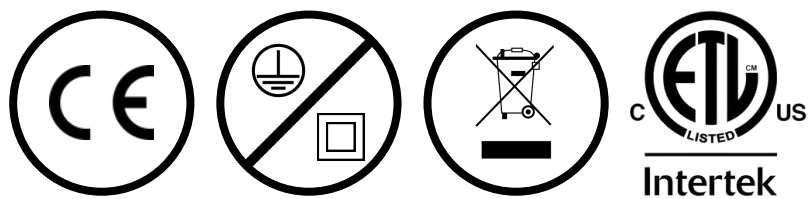

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1500 lm ~ 2400 lm
Efficiency	≥ 65 lm/W ~ 80 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Surface

DIMENSIONS:

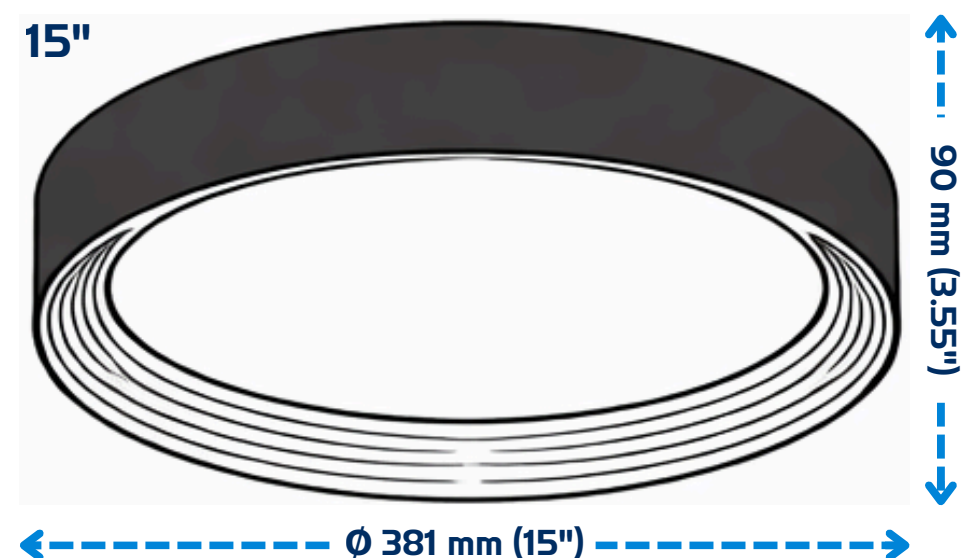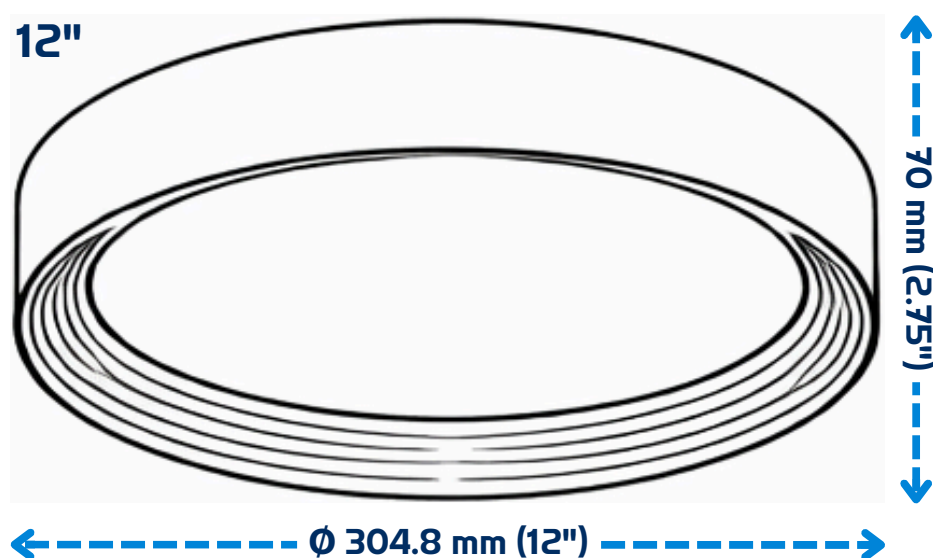

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
MCA12 12 Inches	24W	120D 120°	27K 2700K	9 90	12RE 120 VAC Dimmable TRIAC	N/A	WW White & White
MCA15 15 Inches	30W		30K 3000K				WB White & Black
							BB Black & Black
							BW Black & White
							** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
MCA12-24W-120D-27K9-12RE-W	≥ 1 500	≥ 65
MCA15-30W-120D-30K9-12RE-W	≥ 2 400	≥ 80



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


OAK Series

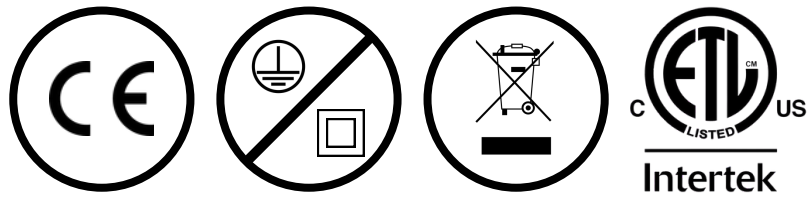

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1200 lm
Efficiency	≥ 40 lm/W
Dimming	TRIAC
Lifetime	$\geq 50\ 000$ Hours
Mounting	Surface

DIMENSIONS:

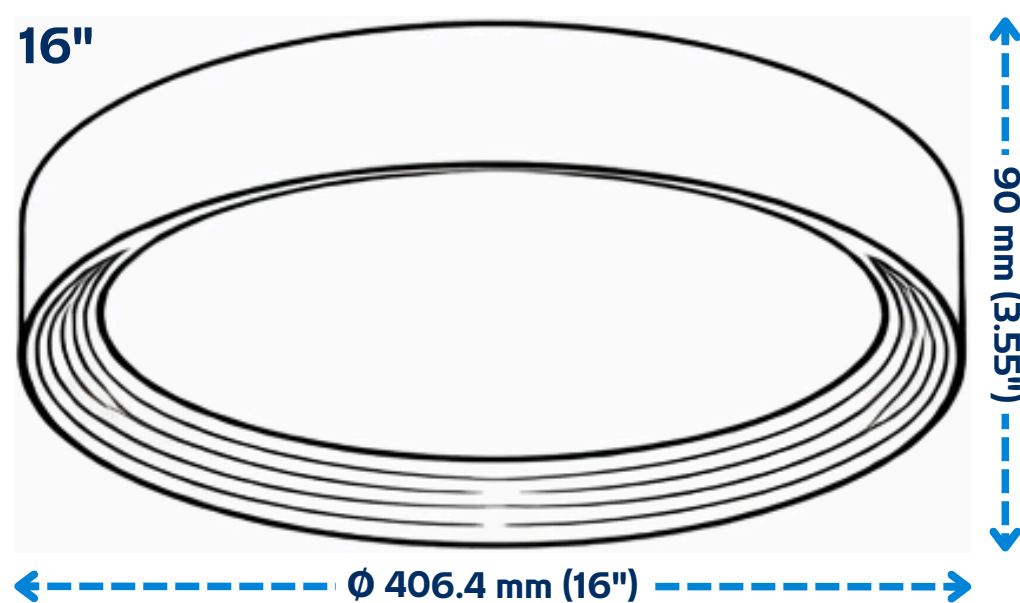

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
OK01	30W	120D 120°	30K 3000K	9 90	12RE 120 VAC Dimmable TRIAC	N/A	W White
							B Black
							** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
OK01-30W-120D-30K9-12RE-W	≥ 1 200	≥ 40



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com



GLASS Series

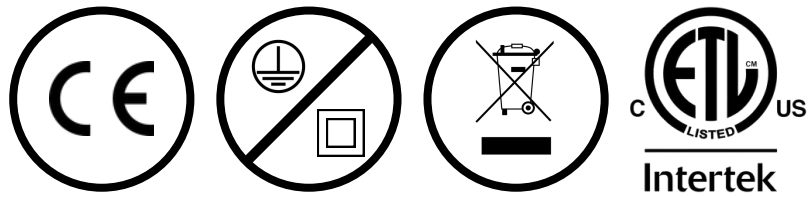

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 750 lm ~ 1000 lm
Efficiency	≥ 50 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Surface

DIMENSIONS:

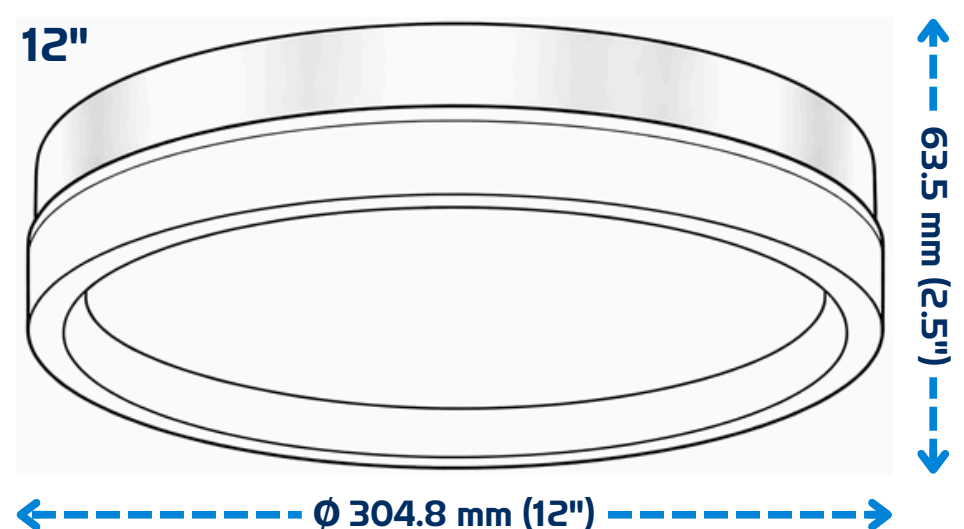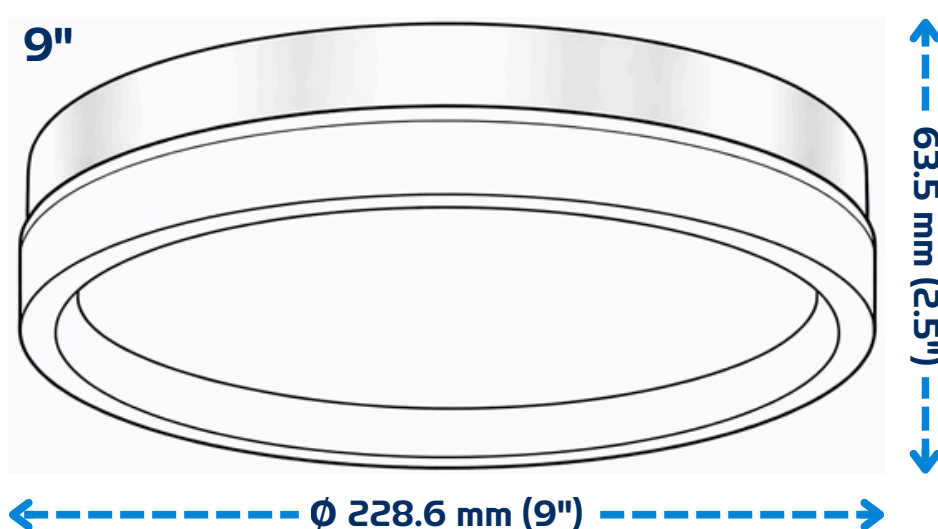

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
GLS9 9 Inches	15W	120D 120°	3CCT 30K ~ 50K	9 90	12RE 120 VAC Dimmable TRIAC	N/A	S Silver
GLS12 12 Inches	20W						** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
GLS9-15W-120D-3CCTK9-12RE-S	≥ 750	≥ 50
GLS12-20W-120D-3CCTK9-12RE-S	≥ 1 000	≥ 50



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127



St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


CYMBAL Series

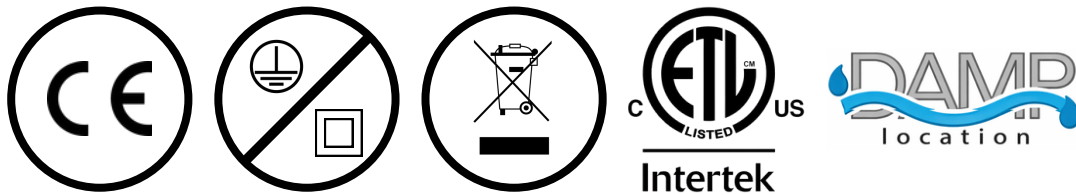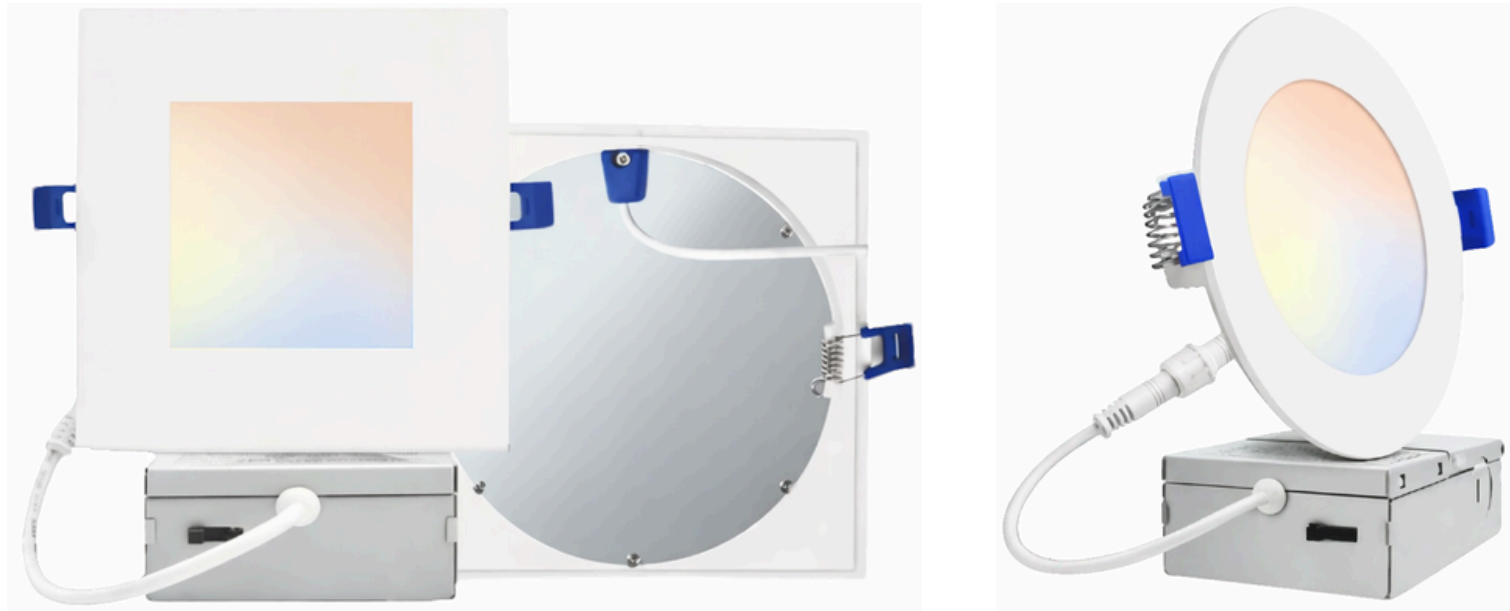

TECHNICAL INFORMATION:

Voltage Range	120 VAC / 100-277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 990 lm ~ 1320 lm
Efficiency	≥ 110lm/W
Dimming	TRIAC / 0 ~ 10V
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

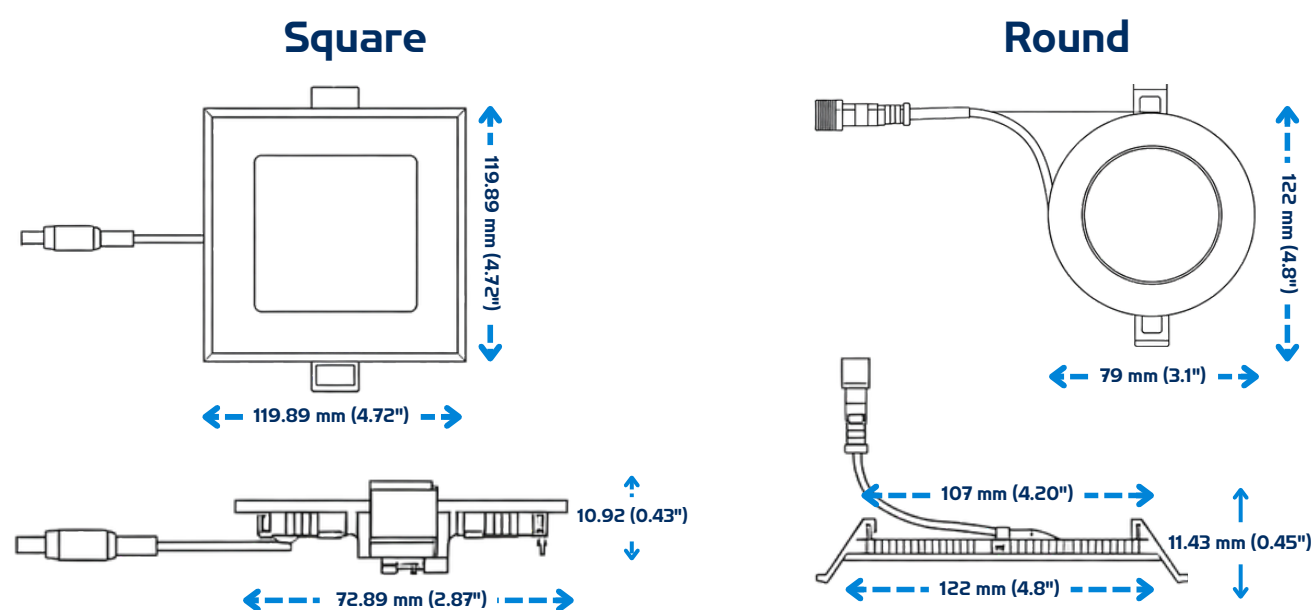

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
CYM4S 4 Inches	9W	120D 120°	5CCT 27K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	W White
CYM6S 6 Inches	12W				27RE 100 ~ 277 VAC Dimmable 0 ~ 10V		** Other Options On Request
CYM4R 4 Inches							
CYM6R 6 Inches							

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
CYM4S-9W-120D-5CCTK8-12RE-W	≥ 990	≥ 110
CYM6R-12W-120D-5CCTK8-12RE-W	≥ 1320	≥ 110



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com

VELA Series





*This fixture must be installed with this accessory:

MPS-234

MPR-234

Square Mounting For (X)"


Round Mounting For (X)"

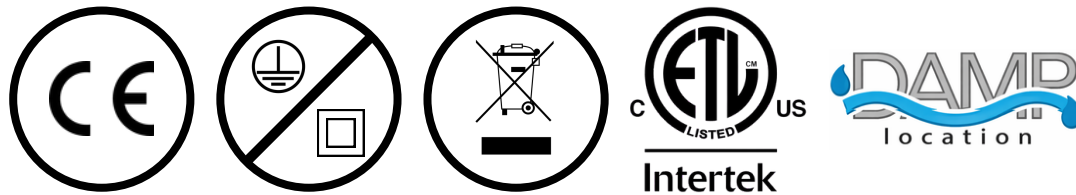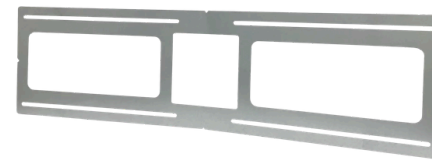

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1020 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

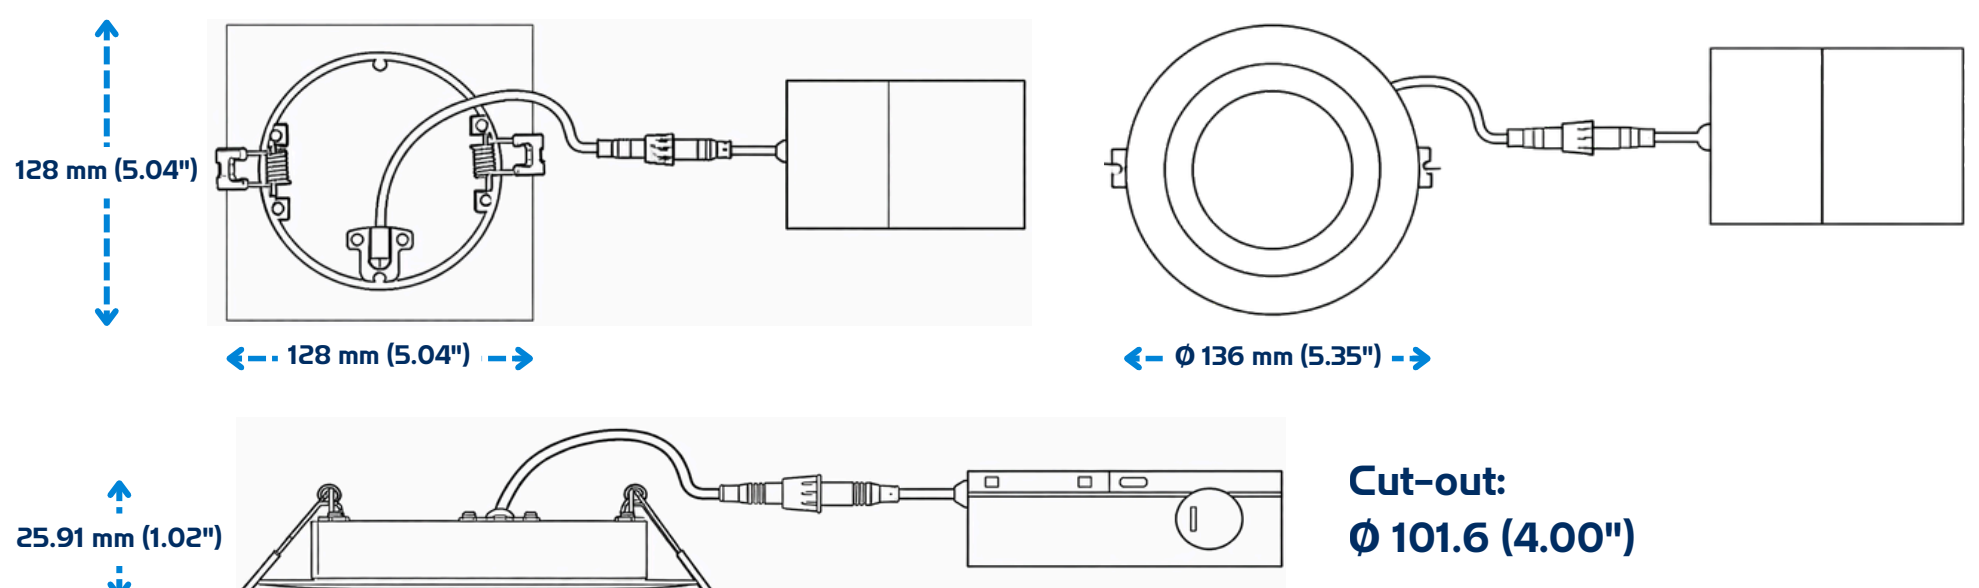

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
VLS	12W	120D 120°	5CCT 27K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	MPR-234 Mounting Plate	W White
VLR				9 90		MPS-234 Mounting Plate	B Black
						N/A	** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
VLS-12W-120D-5CCTK8-12RE-W	≥ 1 020	≥ 85
VLR-12W-120D-5CCTK8-12RE-W	≥ 1 020	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


GYMBAL Series

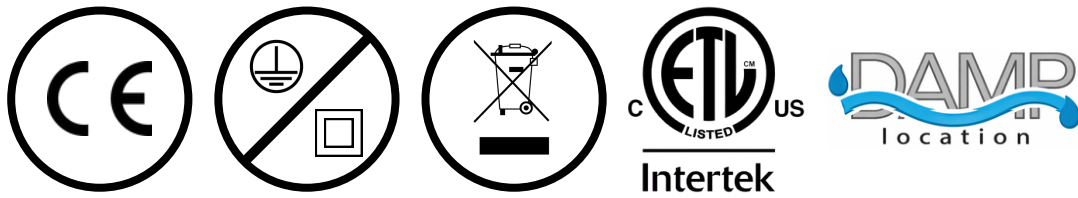

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1020 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

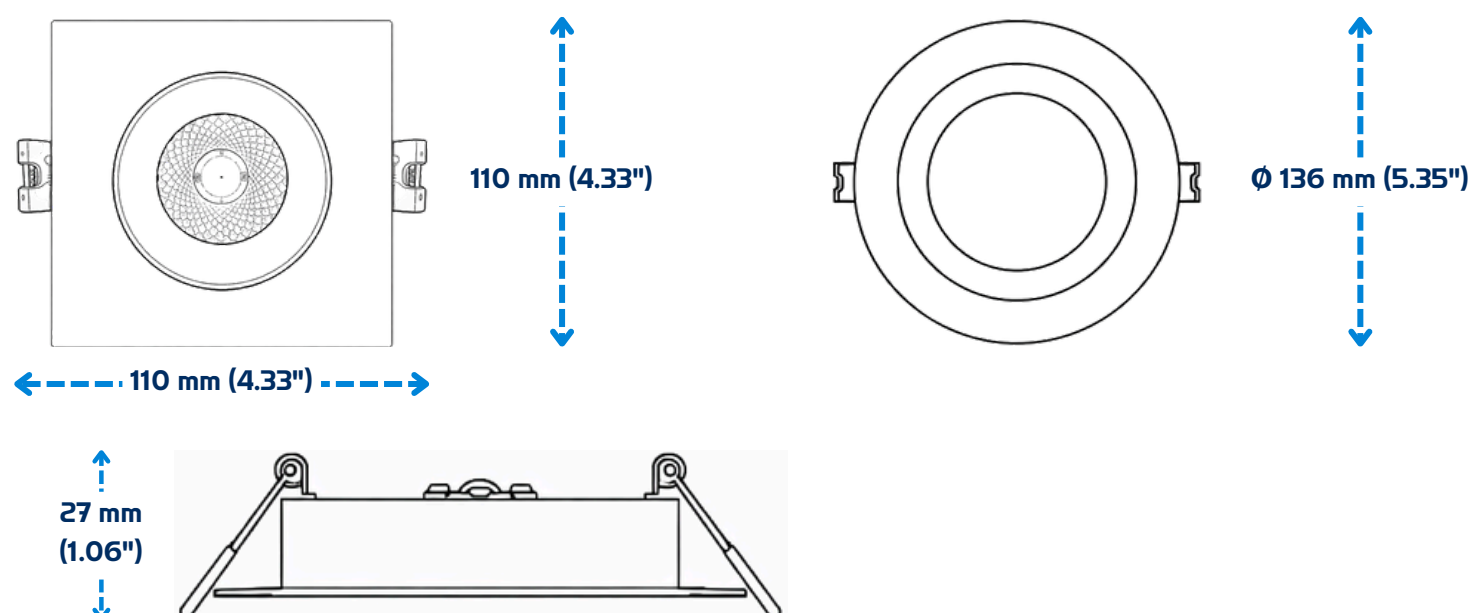

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
GYMS	12W	10D 10°	5CCT 27K ~ 50K	9 90	12RE 120 VAC Dimmable TRIAC	EB Emergency Battery	W White
GYMR		23D 23°				N/A	B Black
		38D 38°					** Other Options On Request
		60D 60°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
GYMS-12W-38D-5CCTK9-12RE-W	≥ 1 020	≥ 85
GYMR-12W-60D-5CCTK9-12RE-B	≥ 1 020	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


GYMBAL 2S & 3S Series

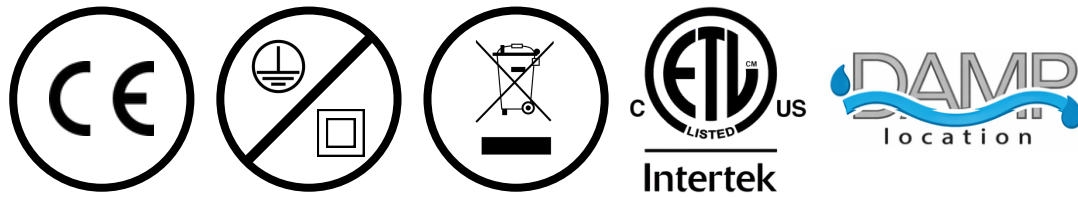

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 2000 lm ~ 3000 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

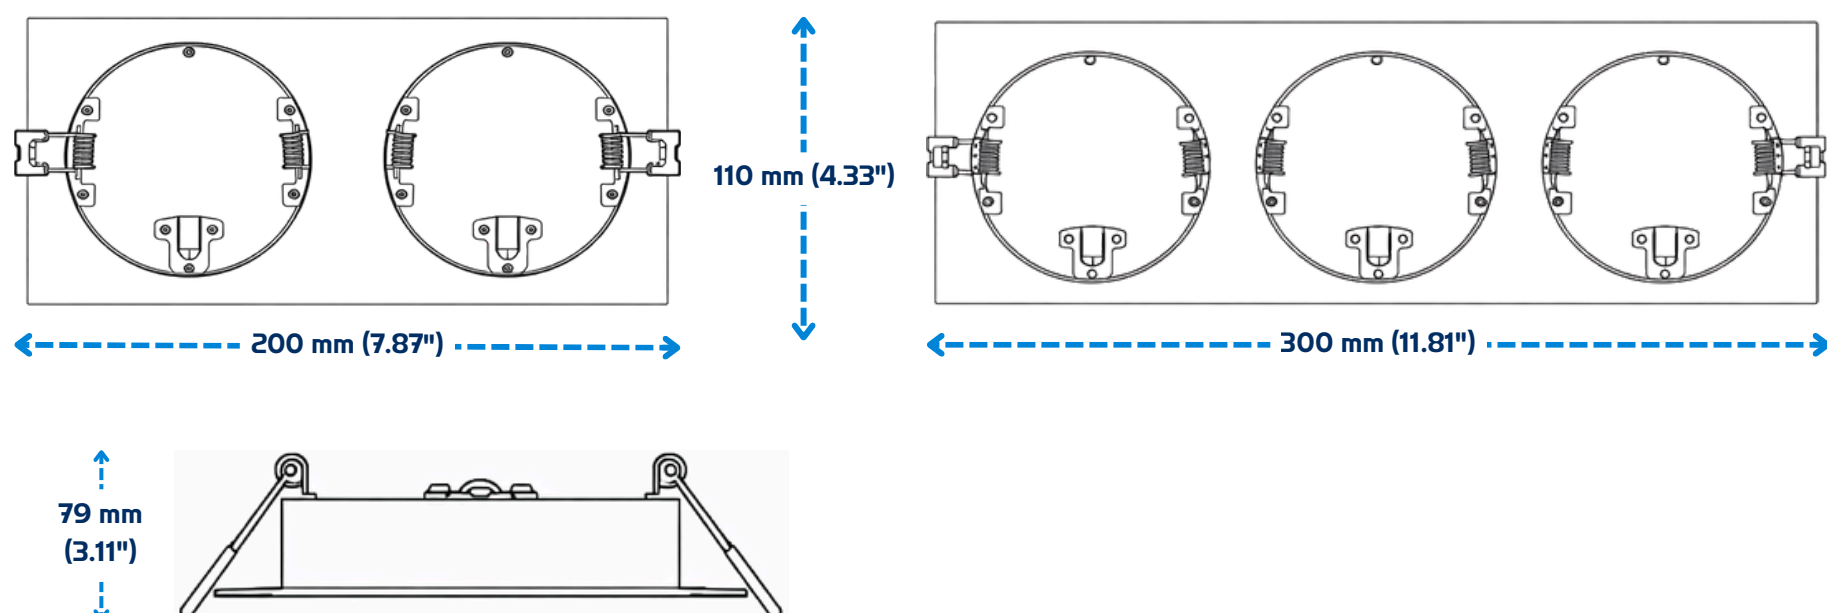

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
GYM2S	24W	10D 10°	5CCT 27K ~ 50K	9 90	12RE 120 VAC Dimmable TRIAC	EB Emergency Battery	W White
GYM3S	36W	23D 23°				N/A	B Black
		38D 38°					** Other Options On Request
		60D 60°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
GYM2S-24W-38D-5CCTK9-12RE-W	≥ 2 000	≥ 85
GYM3S-36W-60D-5CCTK9-12RE-W	≥ 3 000	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


GYMBAL 360° Series

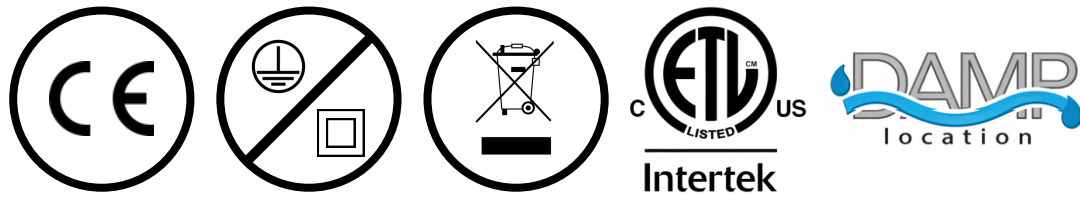

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 850 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC
Lifetime	$\geq 50\ 000$ Hours
Mounting	Recessed

DIMENSIONS:

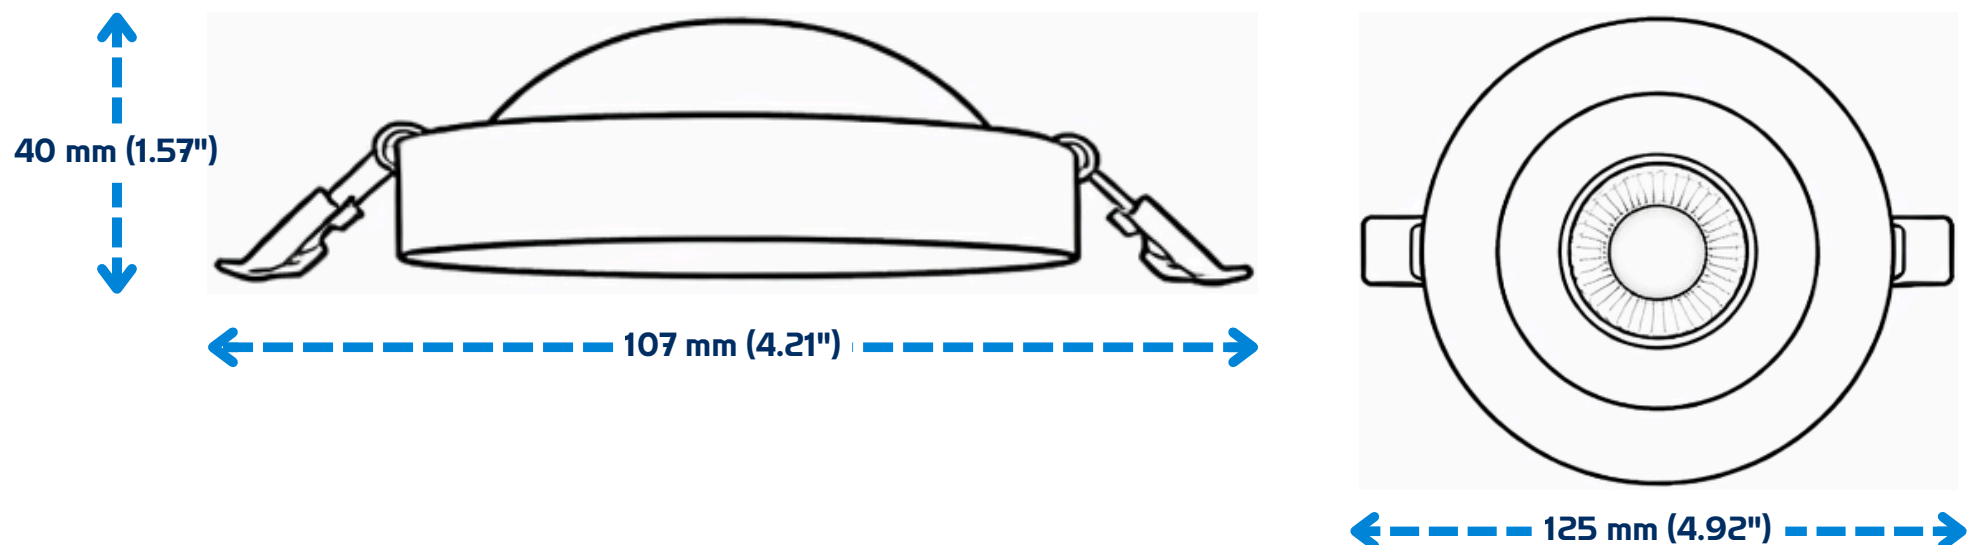

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
GYM-360	10W	10D 10°	5CCT 27K ~ 50K	9 90	12RE 120 VAC Dimmable TRIAC	EB Emergency Battery	W White
		23D 23°				N/A	B Black
		38D 38°					** Other Options On Request
		60D 60°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
GYM-360-10W-60D-5CCTK9-12RE-W	≥ 850	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


LUX Series

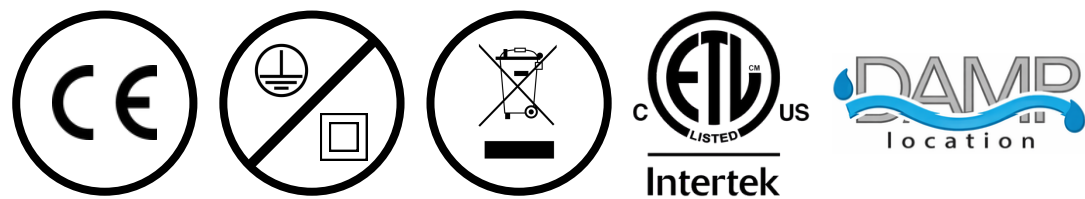

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 720 lm ~ 1200 lm
Efficiency	≥ 80 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

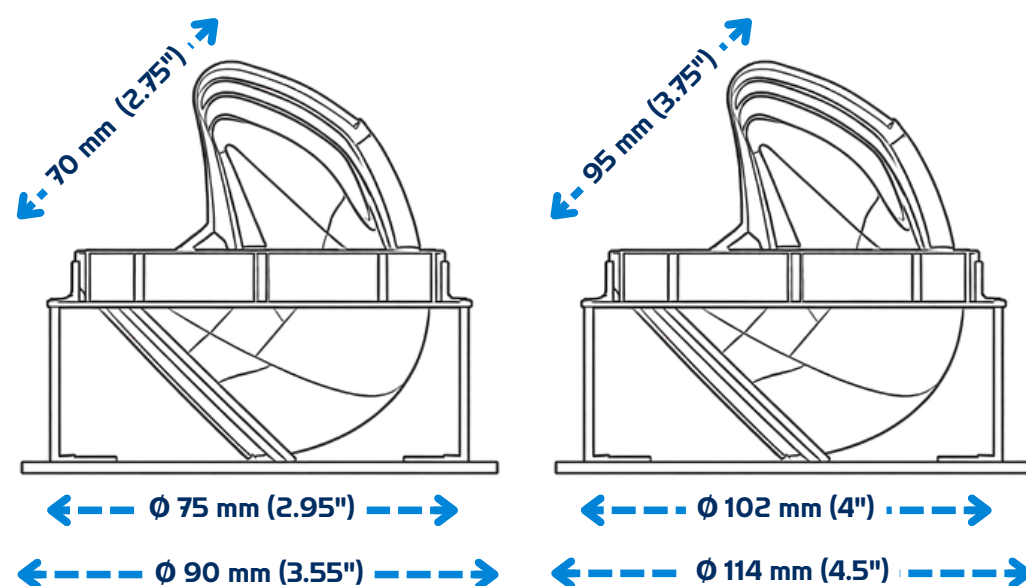

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
LUX-3 3 Inches	9W	15D 15°	27K 2700K	9 90	12RE 120 VAC Dimmable TRIAC	EB Emergency Battery	WW White & White
LUX-4 4 Inches	15W	24D 24°	30K 3000K			N/A	BB Black & Black
		38D 38°	40K 4000K				** Other Options On Request
		60D 60°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
LUX3-9W-60D-30K9-12RE-W	≥ 720	≥ 80
LUX4-15W-60D-30K9-12RE-W	≥ 1 200	≥ 80



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


ARCUS Series



TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1000 lm ~ 1700 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

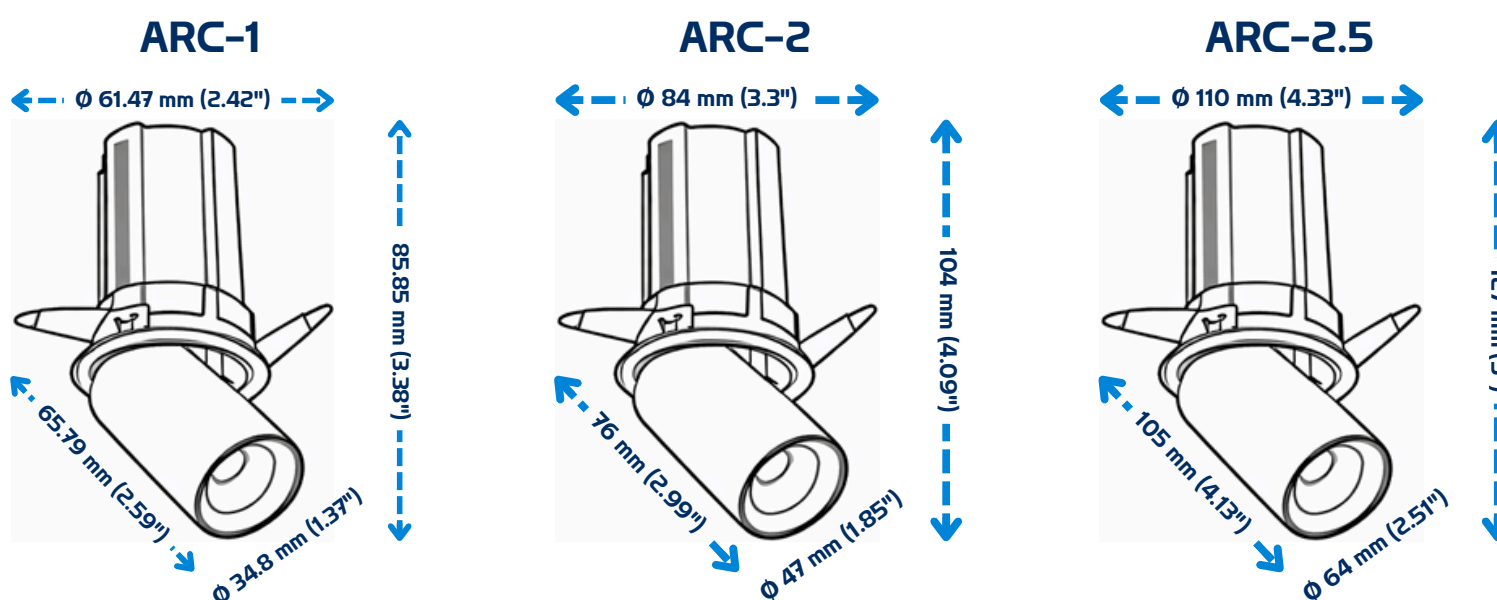

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES		COLOR
ARC-1	10W (1.5")	15D 15°	5CCT 27K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	R Round Trim	E Ellipse Trim	W White
ARC-2	12W (2.0")	24D 24°	DTW 18K - 30K	9 90	12REE 120 VAC. Dimmable TRIAC (5% ~ 100%)	RT Round Trimless	ET Ellipse Trimless	B Black
ARC-2.5	18W (2.5")	38D 38°			27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	S Square Trim	RE Rectangle Trim	BZ Bronze
	25W (2.5")	60D 60°				ST Square Trimless	RET Rectangle Trimless	BN Brush Nickel
								** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
ARC-1-10W-38D-30K9-12RE-WW	≥ 850	≥ 85
ARC-2-12W-15D-27K9-12RE-RT-WG	≥ 1 000	≥ 85
ARC-3-20W-60D-40K9-12RE-ET-WB	≥ 1 700	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


LOTUS M Series



TECHNICAL INFORMATION:


Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1020 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

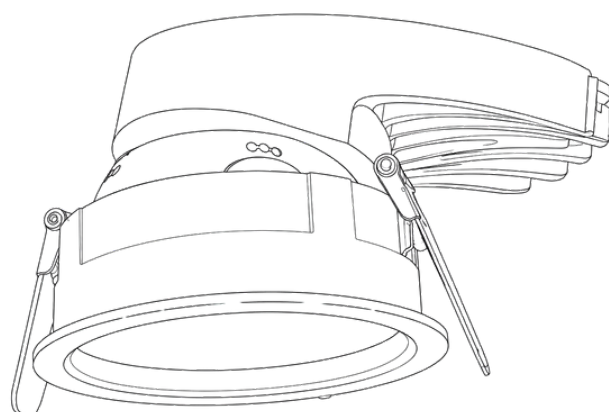

ROUND

Length: 3.25"
Cut-out: 3.25"
Cut-in: 2.75"

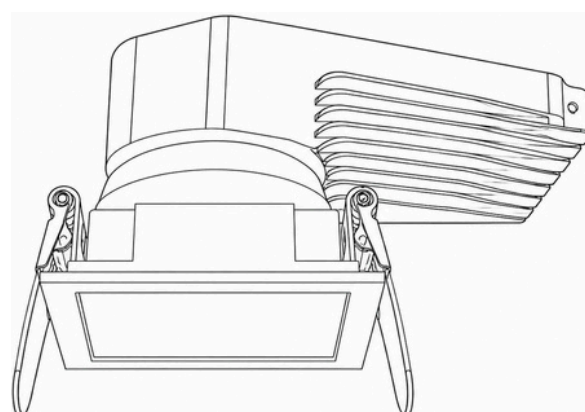

SQUARE

Length: 3.25"
Cut-out: 3.25"
Cut-in: 2.50"


CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	TRIM	REFLECTOR
LOT3M 3 Inches	12W	15D 15°	5CCT 27K ~ 50K	9 90	12RE 120 VAC Dimmable TRIAC	RTW Round Trim White	RWRF Round Reflector White
		24D 24°	27K 2700K			RTB Round Trim Black	RBRF Round Reflector Black
		36D 36°	30K 3000K			STW Square Trim White	RPWRF Round Pin-Hole Reflector White
		55D 55°	40K 4000K			STB Square Trim Black	RPBRF Round Pin-Hole Reflector Black
		50K 5000K	2STW 2 Heads Square Trim White			RSPWRF Round Spot Pin- Hole Reflector White	
		DTW 18K ~ 22K	2STB 2 Heads Square Trim Black			RSPBRF Round Spot Pin- Hole Reflector Black	
						RWWWRF Round Wall Washer Reflector White	
						RWWBRF Round Wall Washer Reflector Black	
						SWRF Square Reflector White	
						SBRF Square Reflector Black	

REFERENCES:

REFERENCES:	5CCTK	
	LUMENS	LM/W
LOT3M-12W-55D-30K9-12RE-RTW-RWRF	≥ 1 020	≥ 85

LOTUS R Series

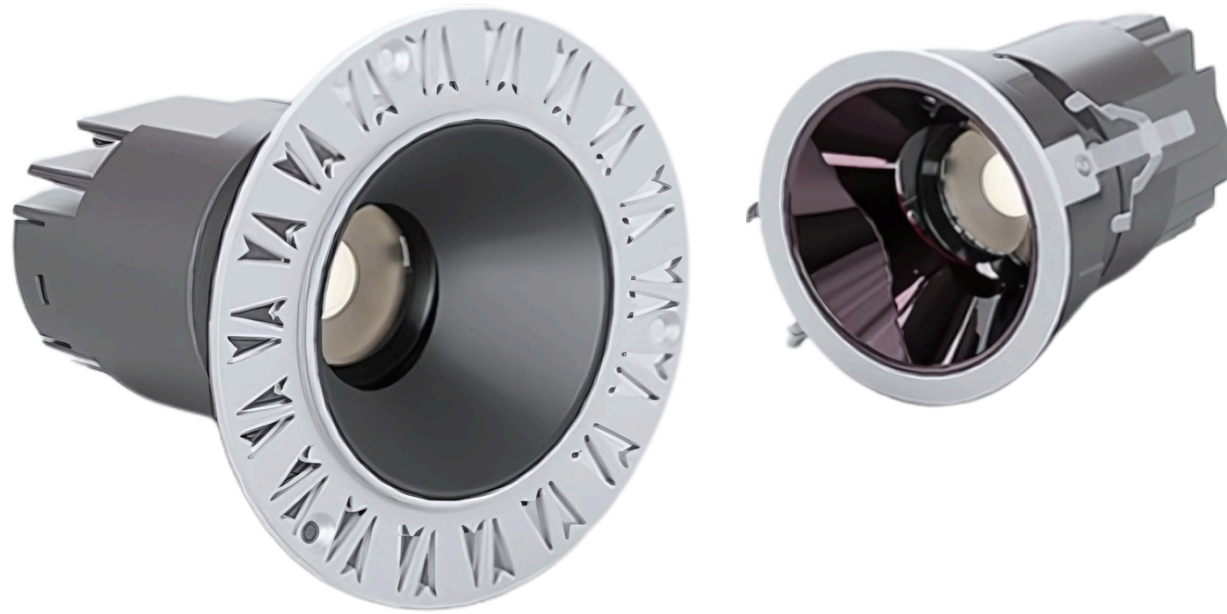


*This fixture must be installed with this accessory:

MPR-234


Round Mounting Plate For (X")




Optical Accessories




Honeycomb





Stretching



Fabric Lens




Soft Light



TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 700 lm ~ 2125 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

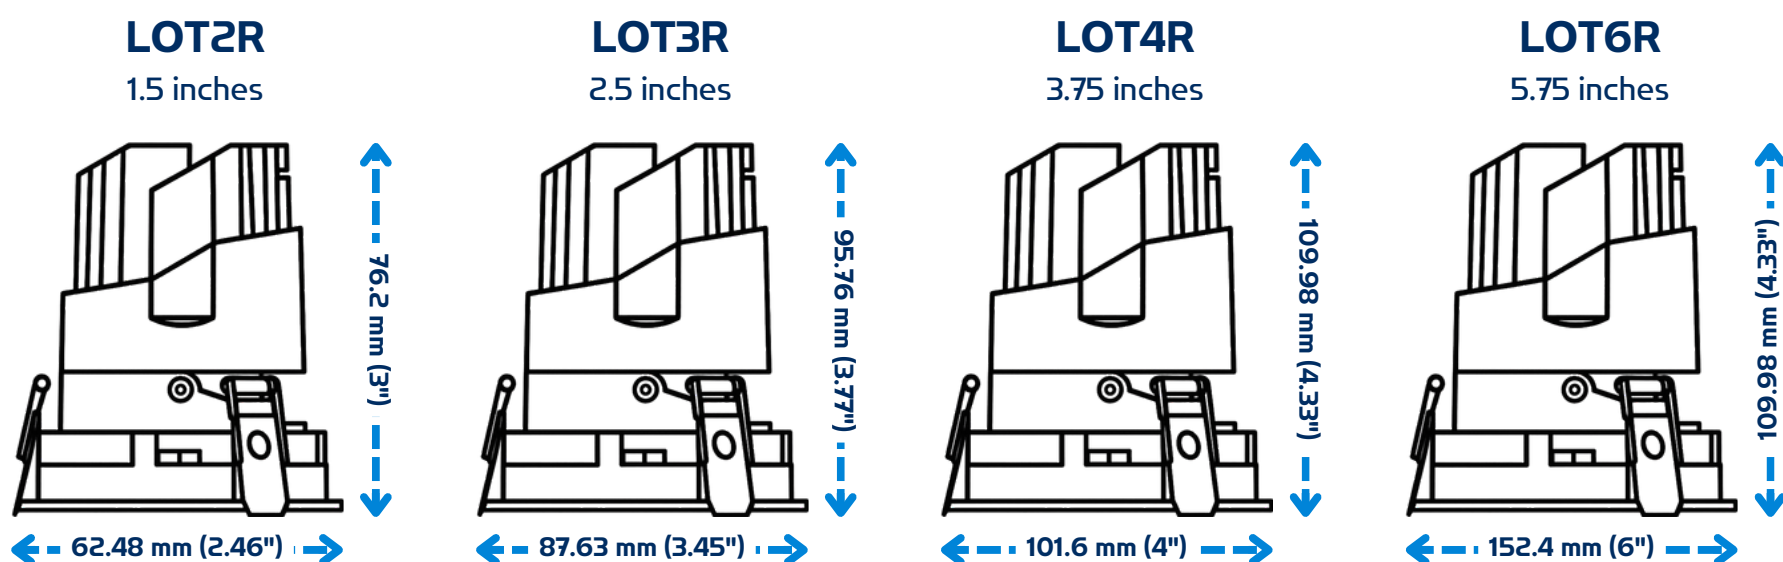

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	MOUNTING	ACCESSORIES	COLOR
LOT2R Round 1.5"	8W	15D 15°	22K 2200K	8 80	12RE 120 VAC Dimmable TRIAC	RT Recessed Trimless	MPR-234 Mounting Plate	WW White & White
LOT3R Round 2.5"	12W	24D 24°	27K 2700K	9 90	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	RF Recessed Flanged	EB Emergency Battery	WB White & Black
LOT4R Round 3.75"	18W	38D 38°	30K 3000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		N/A	BB Black & Black
LOT6R Round 5.75"	25W	55D 55°	40K 4000K		** Other Options On Request			BW Black & White
		WALL WASH 90°	DTW 18K ~ 30K					** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
LOT2R-8W-15D-27K9-27RE-RF-WW	≥ 700	≥ 85
LOT3R-12W-24D-30K8-27RE-RT-WB	≥ 1 020	≥ 85
LOT4R-18W-38D-40K9-12RE-RT-BB	≥ 1 500	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


LOTUS S Series



*This fixture must be installed with this accessory:

MPS-234


Square Mounting Plate With Hanger Bar For (X")




Optical Accessories



Honeycomb






Stretching



Fabric Lens




Soft Light



TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 700 lm ~ 2125 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

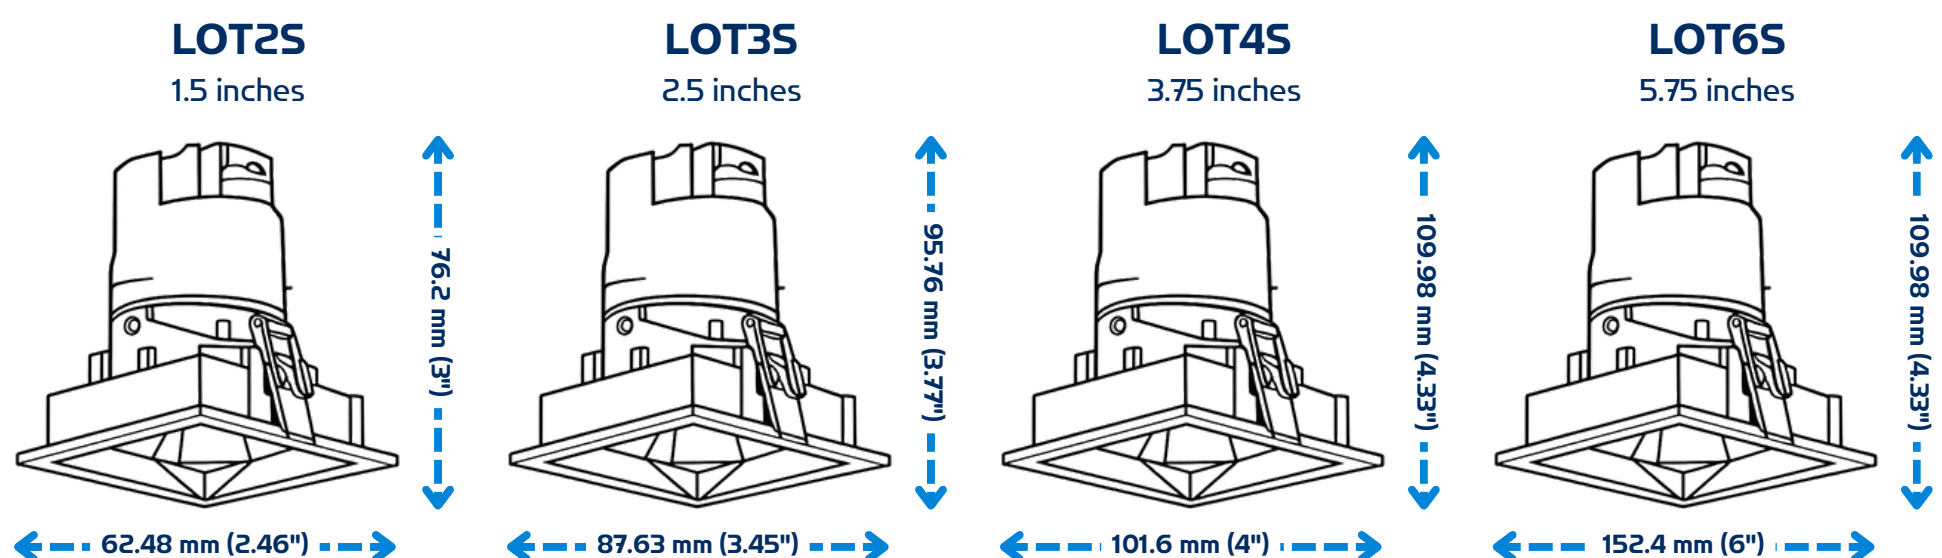

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	MOUNTING	ACCESSORIES	COLOR
LOT2S Round 1.5"	8W	15D 15°	22K 2200K	8 80	12RE 120 VAC Dimmable TRIAC	RT Recessed Trimless	MPS-234 Mounting Plate	WW White & White
LOT3S Round 2.5"	12W	24D 24°	27K 2700K	9 90	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	RF Recessed Flanged	EB Emergency Battery	WB White & Black
LOT4S Round 4.0"	18W	38D 38°	30K 3000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		N/A	BB Black & Black
LOT6S Round 6.0"	25W	55D 55°	40K 4000K		** Other Options On Request			BW Black & White
			DTW 18K ~ 30K					** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
LOT2S-8W-15D-27K9-27RE-RF-WW	≥ 700	≥ 85
LOT3S-12W-24D-30K8-27RE-RT-WB	≥ 1 020	≥ 85
LOT4S-18W-38D-40K9-12RE-RT-BB	≥ 1 500	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com

LOTUS 2H Series



*This fixture must be installed with this accessory:

MPS2-4

Mounting Plate For Double 4"




Optical Accessories



Honeycomb





Stretching



Fabric Lens




Soft Light



TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1360 lm ~ 3060 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

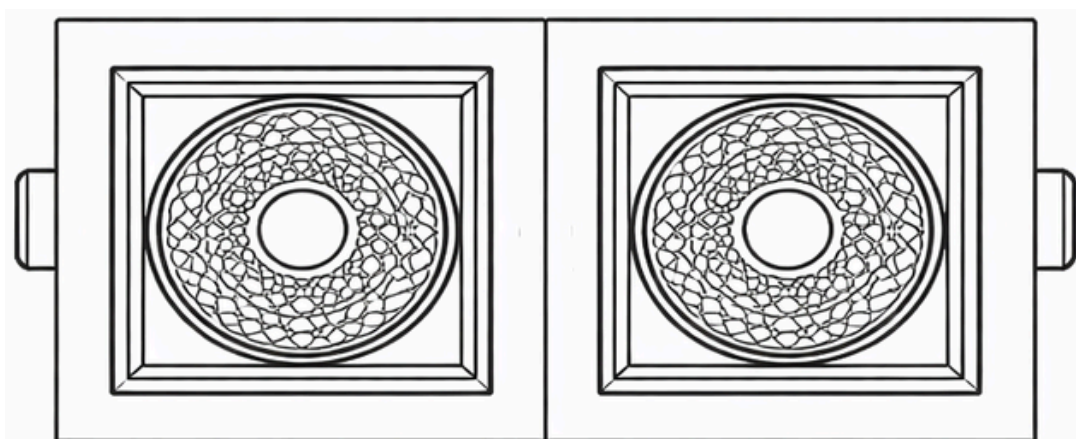

LOT2H-2S

Width: 65 mm (2.6")
Height: 130 mm (5.12")

LOT2H-3S

Width: 65 mm (2.6")
Height: 150 mm (5.91")

LOT2H-4S

Width: 65 mm (2.6")
Height: 180 mm (7.09")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	MOUNTING	ACCESSORIES	COLOR
LOT2H-2S 2 Heads - 2'	16W	15D 15°	22K 2200K	8 80	12RE 120 VAC Dimmable TRIAC	RT Recessed Trimless	MPS2-4 Mounting Plate	WW White & White
LOT2H-3S 2 Heads - 3'	24W	24D 24°	27K 2700K	9 90	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	RF Recessed Flanged	EB Emergency Battery	WB White & Black
LOT2H-4S 2 Heads - 4'	36W	38D 38°	30K 3000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		N/A	BB Black & Black
		55D 55°	40K 4000K		** Other Options On Request			BW Black & White
			DTW 18K - 30K					** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
LOT2H-2S-16W-24D-27K8-12RE-RT-WW	≥ 1 360	≥ 85
LOT2H-3S-24W-38D-30K9-27RE-RF-WB	≥ 2 040	≥ 85
LOT2H-3S-36W-55D-40K9-27RE-RF-BB	≥ 3 060	≥ 85



Miami, USA:

300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:

360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:

Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254


Lima, PERÚ:

Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:

info@moovillum.com



ELA Series

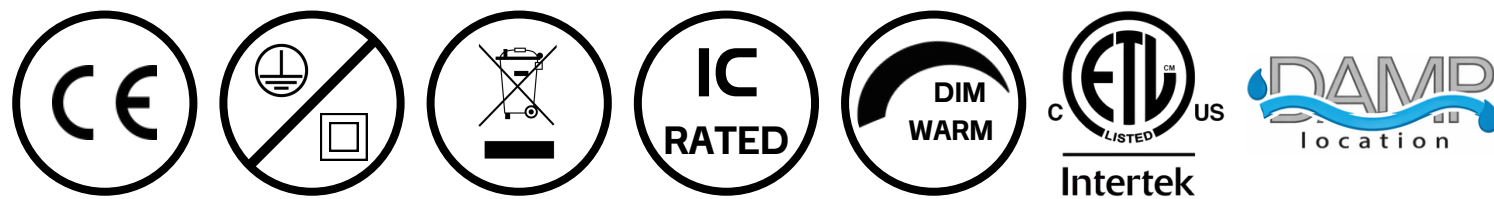

TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 800 lm ~ 1600 lm
Efficiency	≥ 80 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

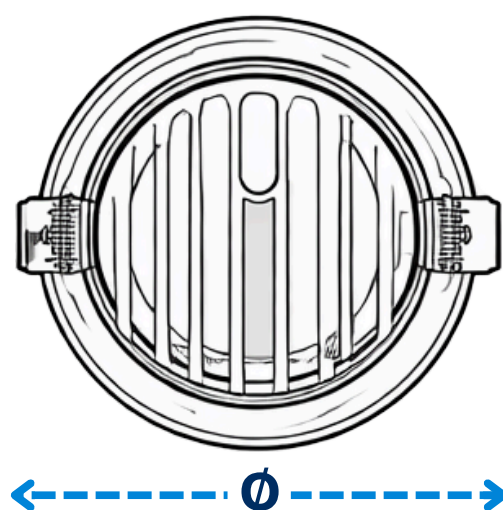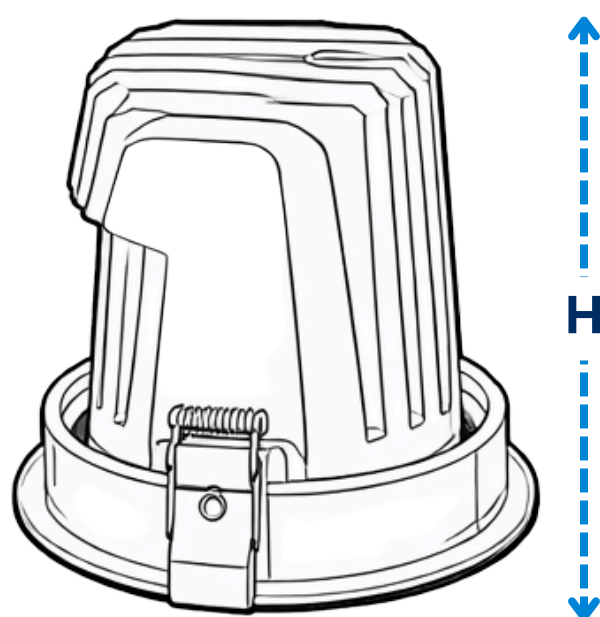

ELA-3	Ø: 85 mm (3.35") H: 80 mm (3.15")
ELA-4	Ø: 108 mm (4.25") H: 104 mm (4.1")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
ELA-3	10W	15D 15°	27K 2700K	8 80	12RE 120 VAC Dimmable TRIAC	MPR-234 Mounting Plate	W White
ELA-4	20W	24D 24°	30K 3000K	9 90	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	B Black
		38D 38°	40K 4000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
ELA-3-10W-36D-30K9-27RE-WB	≥ 800	≥ 80
ELA-4-20W-24D-40K9-12RE-WW	≥ 1 600	≥ 80



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


DOMO Series

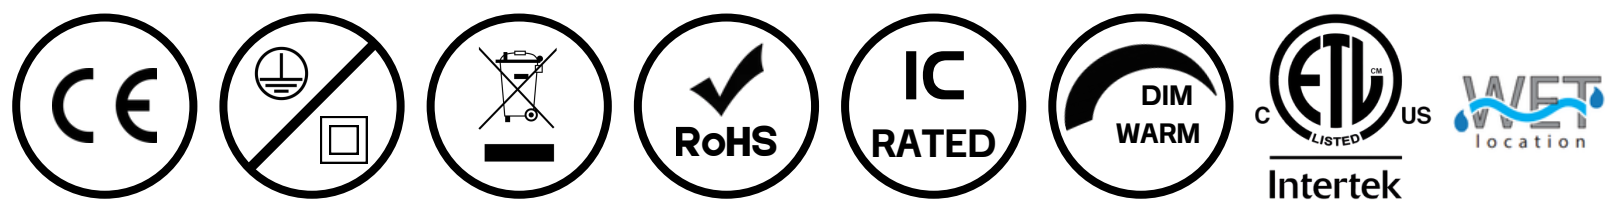

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1000 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC
Lifetime	$\geq 50\ 000$ Hours
Mounting	Recessed

DIMENSIONS:

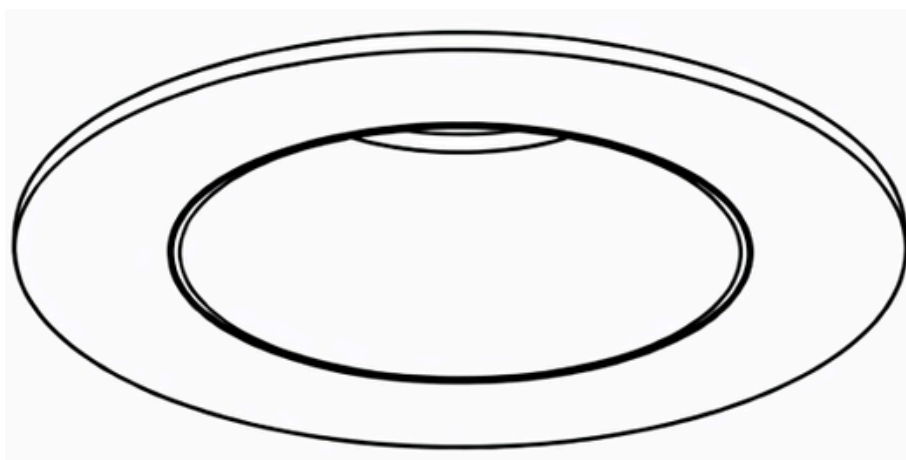

←--- Ø 57.15 mm (2.25") ---→

←----- Ø 92.08 mm (3.625") -----→

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
DOM-3	12W	15D 15°	27K 2700K	9 90	12RE 120 VAC Dimmable TRIAC	MPR-234 Mounting Plate	WW White & White
		24D 24°	30K 3000K			N/A	WB White & Black
		36D 36°	40K 4000K				WG White & Grey
		55D 55°					** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
DOM-3-12W-36D-30K9-12RE-WW	≥ 1 000	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254


Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com

TRAIL Series




*This fixture must be installed
with this accessory:
MP-TRAIL
Square Mounting Plate: (X) Cells

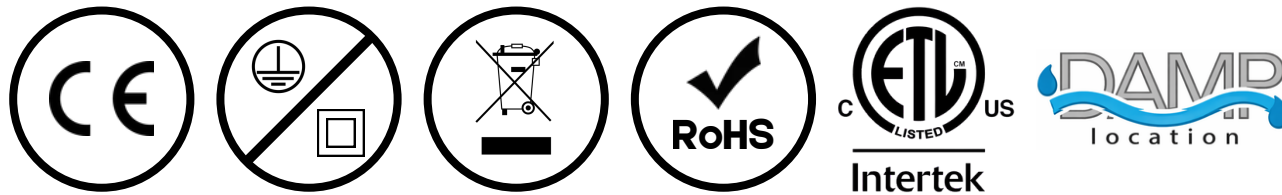

TECHNICAL INFORMATION:


Voltage Range	120 VAC 120 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 3400 lm
Efficiency	≥ 85 lm/W ~ 110 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V Dali
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

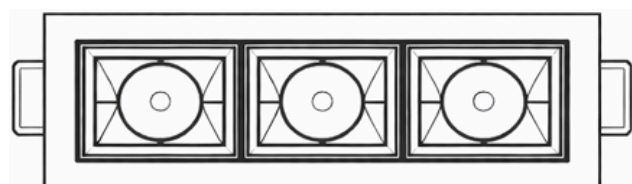


Trail - 3 Head

W: 131 mm (5.2")
H: 55 mm (2.17")

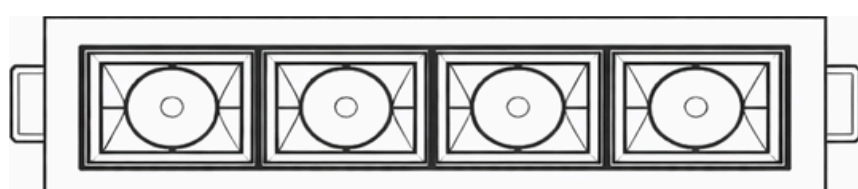

Trail - 4 Head

W: 169 mm (6.65")
H: 55 mm (2.17")

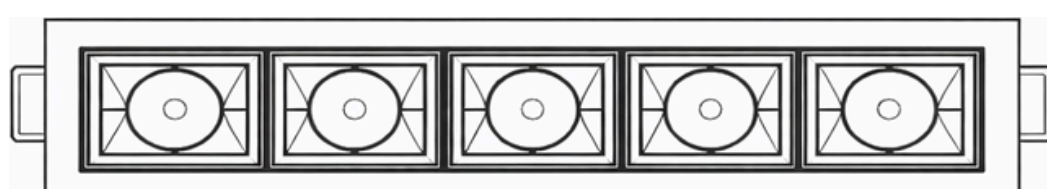

Trail - 5 Head

W: 207 mm (8.15")
H: 55 mm (2.17")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	TRIM	REFLECTOR
TRL03 3 Heads	10W	12D 12°	27K 2700K	8 80	12RE 120 VAC Dimmable TRIAC	MP-TRAIL Mounting Plate	W White	W White
TRL04 4 Heads	12W	23D 23°	30K 3000K	9 90	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	B Black	MB Matte Black
TRL05 5 Heads	15W	38D 38°	35K 3500K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		G Grey	CB Chrome Black
	20W	50D 50°	40K 4000K				** Other Options On Request	

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
TRL03-10W-15D-27K8-12RE-WB	≥ 850	≥ 85
TRL04-15W-38D-27K9-27RE-WW	≥ 1 275	≥ 85
TRL05-15W-45D-30K9-27RE-BCB	≥ 1 275	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


MINI WALL Series



TECHNICAL INFORMATION

Wattage	11W
Total Lumens	1155lm
Delivered Lumens	741lm
Voltage	120-277K
CCT	3000K
CRI	80
Lifetime	50,000 hrs

DIMENSIONS

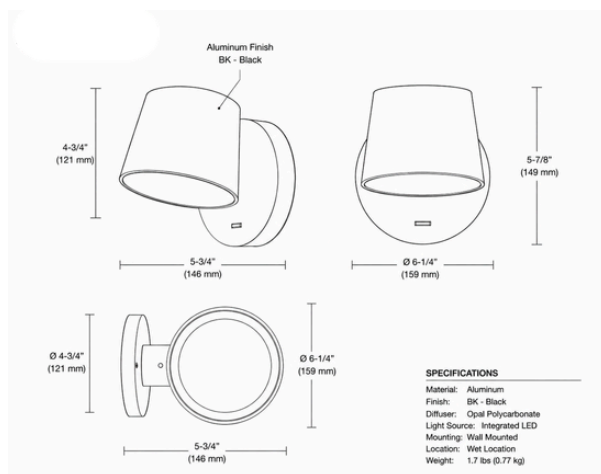

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
MW Series	11W	120D 120°	30K 3000K	8 80	12RE 120 VAC Dimming TRIAC	N/A	W White
							B Black
							** Other Options On Request

REFERENCES

REFERENCES	3000K	
	LUMENS	LM/W
MW-11W-120D-30K8-27RE-B	≥ 741	≥ 67



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 1201, San Isidro, Lima, Perú

Email:
info@moovillum.com


EDGE Series

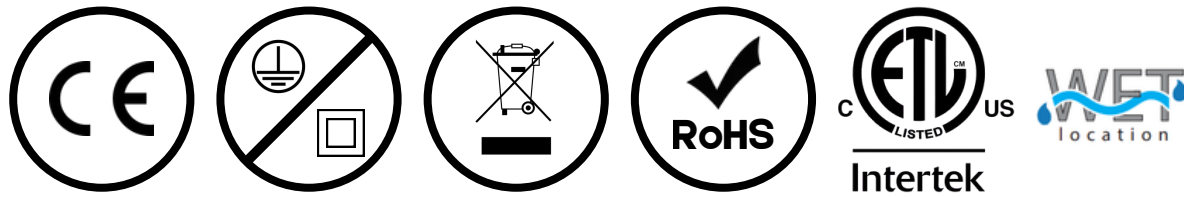

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 960 lm
Efficiency	≥ 80 lm/W
Dimming	TRIAC I Dimmable. 0 ~ 10 V
Lifetime	$\geq 50\ 000$ Hours
Mounting	Wall

DIMENSIONS:

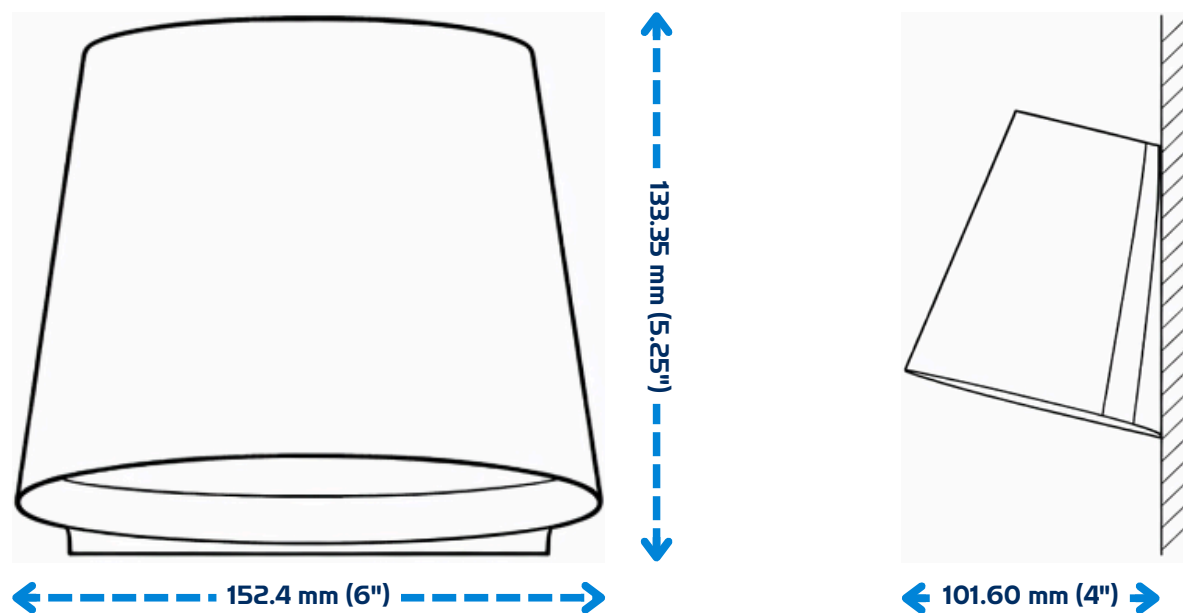

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
EDG	12W	100D 100°	30K 3000K	9 90	12RE 120 VAC Dimmable TRIAC	N/A	W White
					27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V		B Black
					27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
EDG-12W-100D-30K9-27RE-W	≥ 960	≥ 80



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


CUBE Series

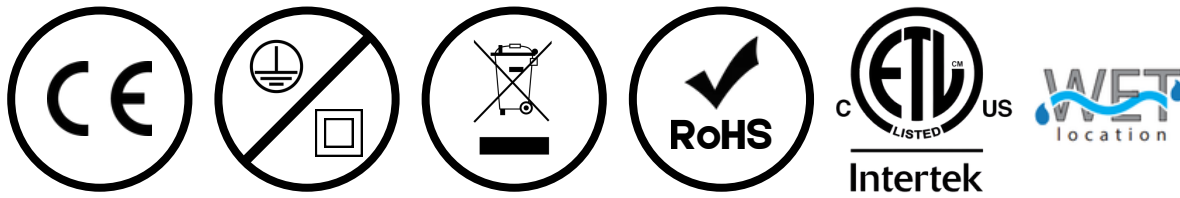

TECHNICAL INFORMATION:

Voltage Range	120 VAC 120 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 900 lm
Efficiency	≥ 100 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

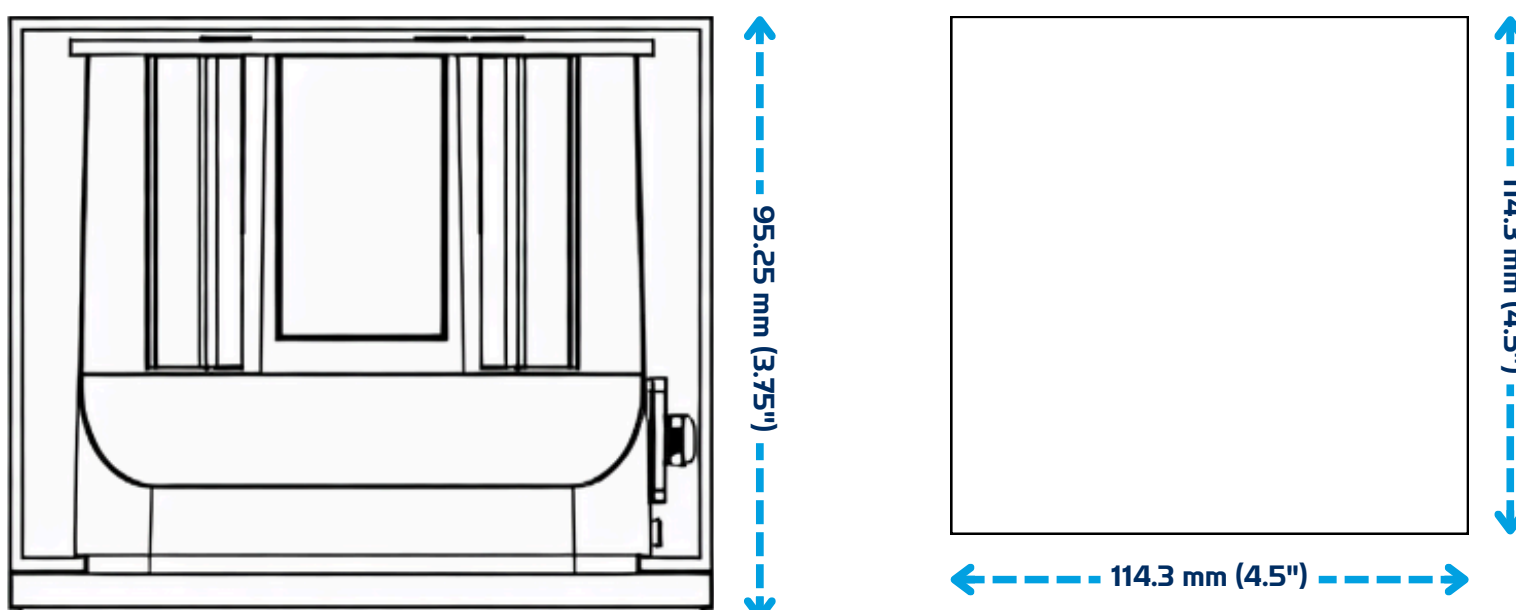

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
CBO1	9W	100D 100°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	W White
					27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V		B Black
					27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
CB01-9W-100D-30K8-12RE-B	≥ 900	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


ODI Series

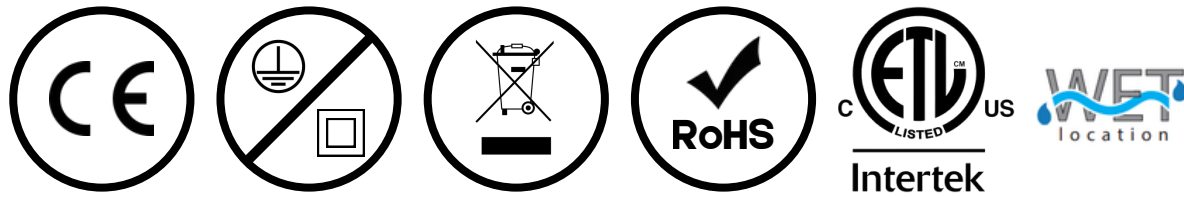

TECHNICAL INFORMATION:

Voltage Range	120 VAC 120 ~ 277 VAC
Power Factor	≥ 0.80
Luminous Flux	≥ 1600 lm ~ 2800 lm
Efficiency	≥ 65 lm/W ~ 70 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

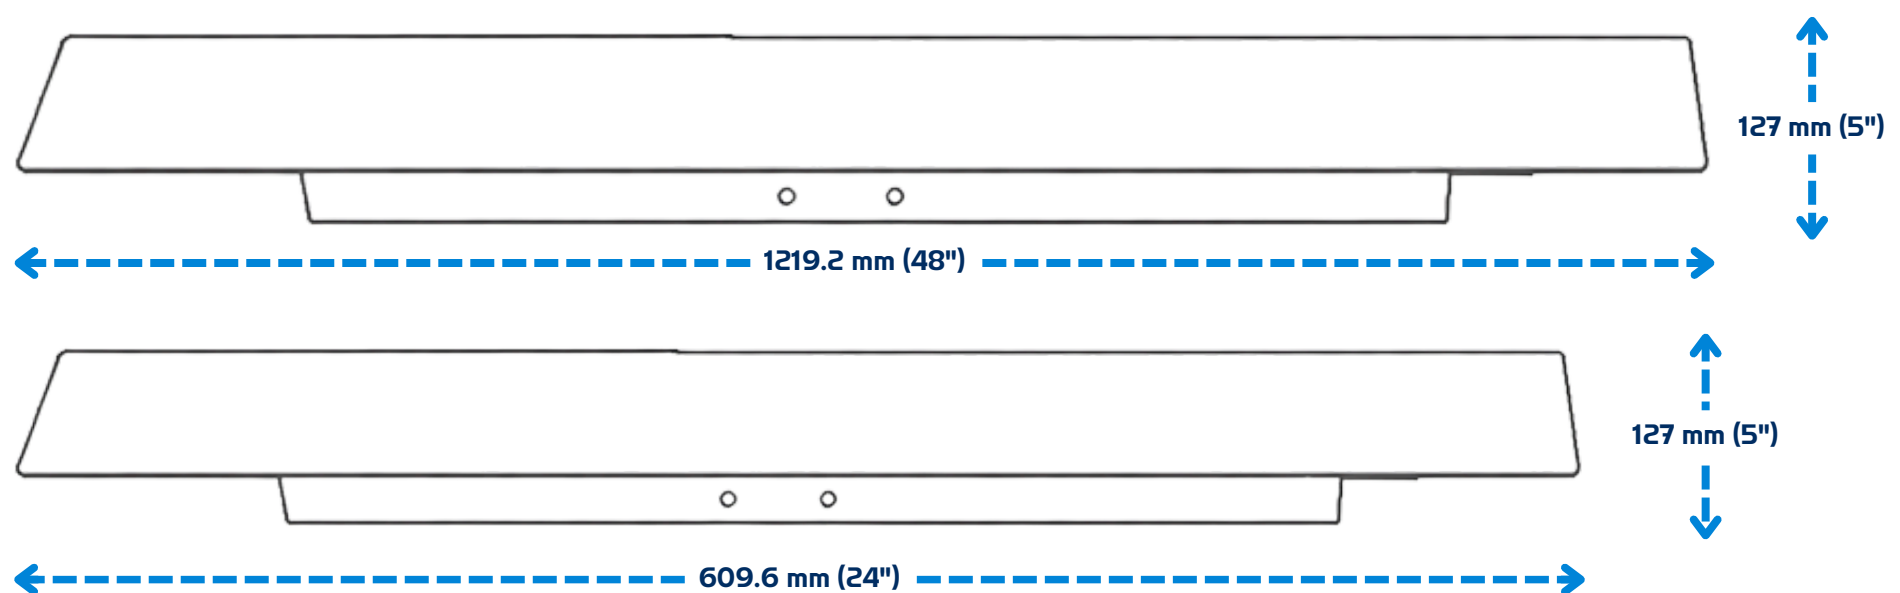

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
OD01 24 Inches	24W	100D 100°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	B Black
OD01 48 Inches	40W				27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
OD01-24W-100D-30K8-12RE-B (24")	≥ 1 600	≥ 65
OD01-40W-100D-30K8-12RE-B (48")	≥ 2 800	≥ 70



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


ODI 2 Series

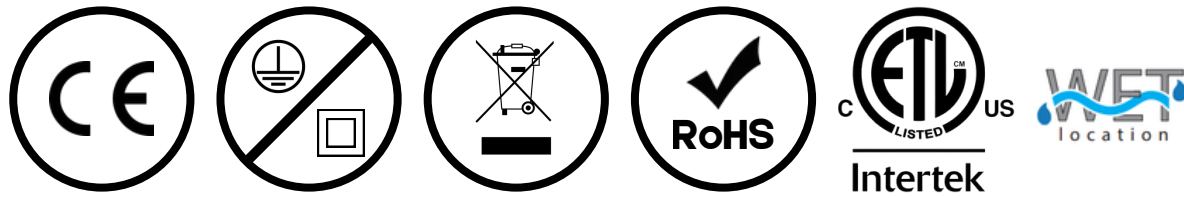

TECHNICAL INFORMATION:

Voltage Range	120 VAC 120 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1600 lm ~ 2800 lm
Efficiency	≥ 65 lm/W ~ 70 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

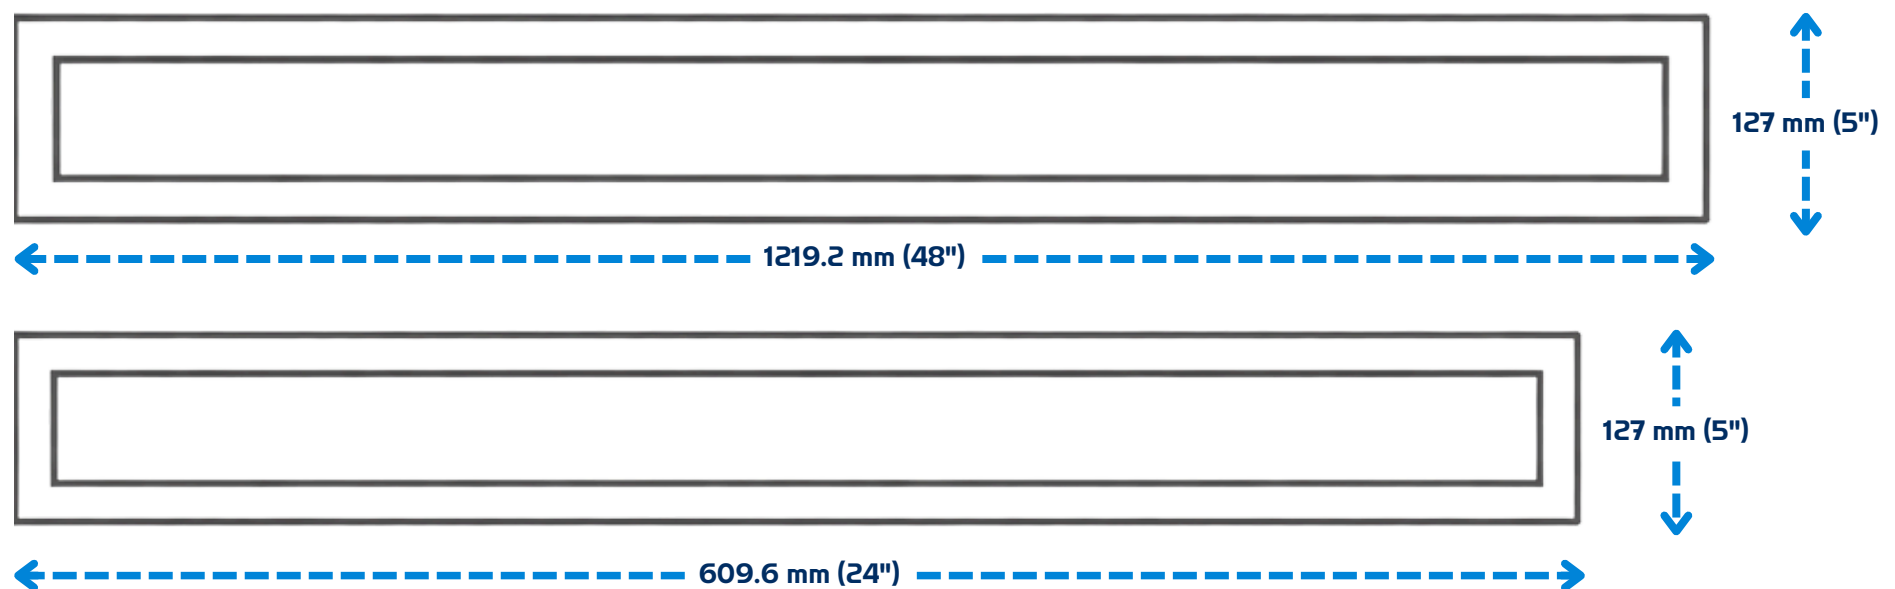

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
OD02 24 Inches	24W	100D 100°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	B Black
OD02 48 Inches	40W				27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
OD02-24W-100D-30K8-12RE-B (24")	≥ 1 600	≥ 70
OD02-40W-100D-30K8-12RE-B (48")	≥ 2 800	≥ 70



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


ALTA Series

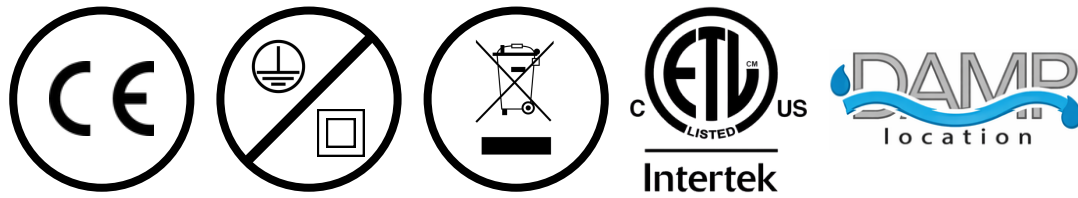

TECHNICAL INFORMATION:


Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 720 lm ~ 1700 lm
Efficiency	≥ 85 lm/W ~ 100 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

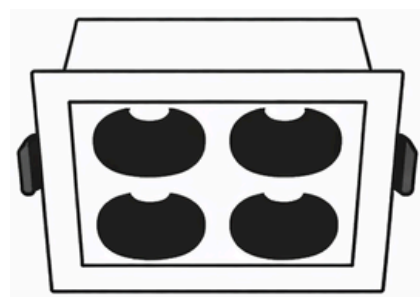

Alta - 4 Heads

W: 76 mm (2.99")
H: 76 mm (2.99")
D: 52 mm (2.05")
Cut-out: 68*68 mm (2.68"*2.68")

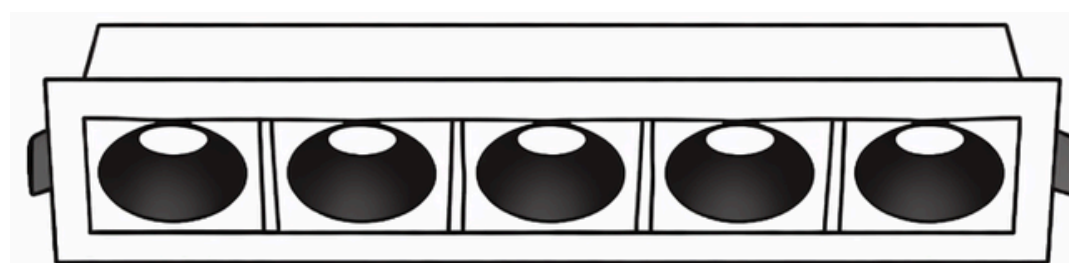

Alta - 5 Heads

W: 148 mm (5.83")
H: 46 mm (1.81")
D: 52 mm (2.05")
Cut-out: 140*35mm (5.51"*1.38")

Alta - 10 Heads

W: 148 mm (5.83")
H: 76 mm (2.99")
D: 52 mm (2.05")
Cut-out: 140*68mm (5.51"*2.68")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
ALT4 4 Heads	8W	15D 15°	30K 3000K	9 90	12RE 120 VAC Dimmable TRIAC	EB Emergency Battery	W White
ALT5 5 Heads	10W	24D 24°				SE Occupancy Sensor	** Other Options On Request
ALT10 10 Heads	20W	38D 38°				N/A	

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
ALT4-8W-15D-30K9-12RE-W	≥ 720	≥ 90
ALT5-10W-24D-30K9-12RE-W	≥ 960	≥ 96
ALT10-20W-38D-30K9-12RE-W	≥ 1 700	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com

DOT Series

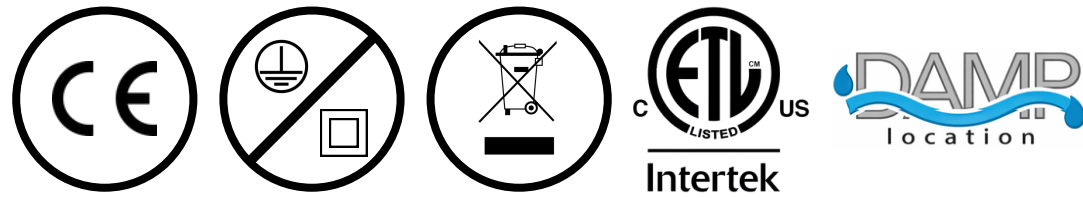


TECHNICAL INFORMATION:


Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1020 lm
Efficiency	≥ 85 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:


←-- Ø 110 mm (4.33") --→

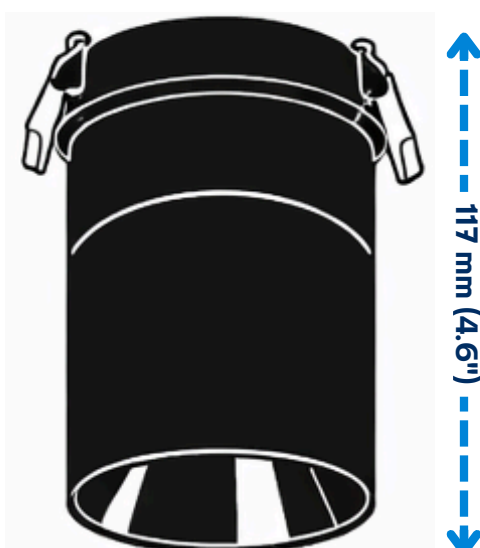

←-- Ø 110 mm (4.33") --→

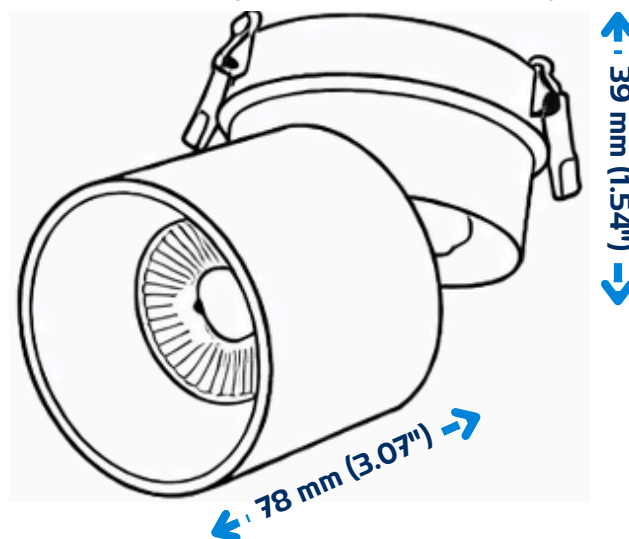

←-- Ø 110 mm (4.33") --→

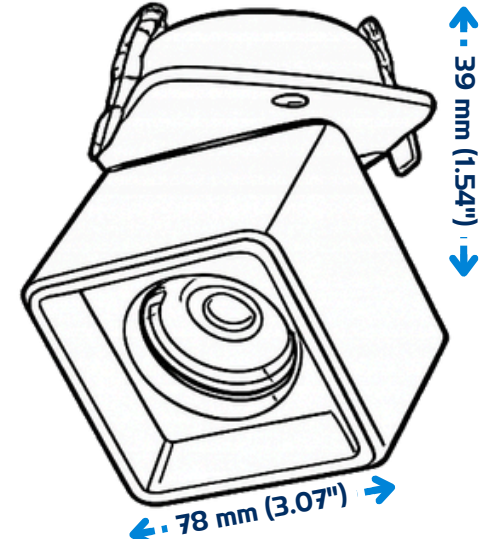

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
DTR Round	12W	15D 15°	5CCT 27K ~ 50K	9 90	12RE 120 VAC Dimmable TRIAC	N/A	W White
DTS Square		24D 24°	DTW 18K ~ 30K				B Black
		38D 38°					** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
DTR-12W-15D-5CCTK9-12RE-W	≥ 1 020	≥ 85
DTS-12W-24 D-5CCTK9-12RE-W	≥ 1 020	≥ 85



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


POD Series

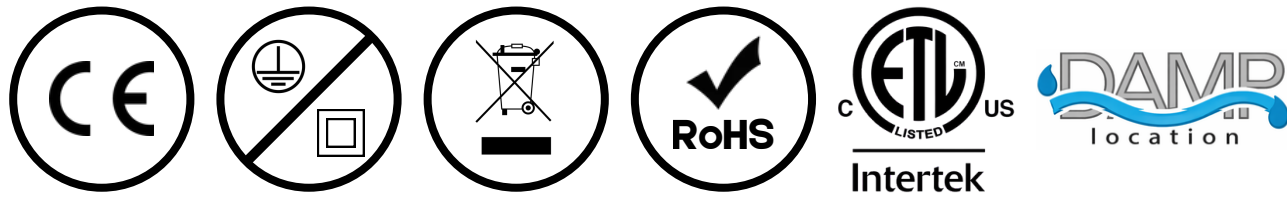

TECHNICAL INFORMATION:


Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 720 lm ~ 960 lm
Efficiency	≥ 60 lm/W ~ 90 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Recessed

DIMENSIONS:

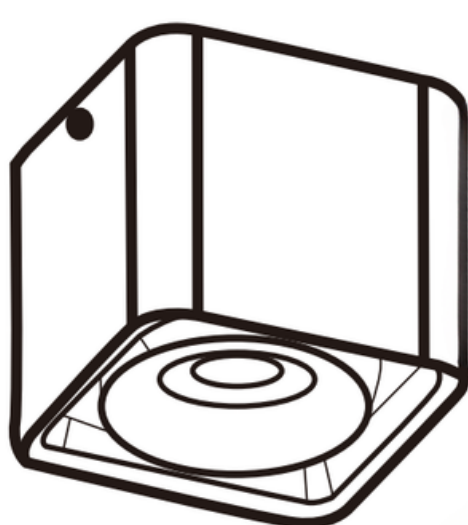

101.6 mm (4")

101.6 mm (4")

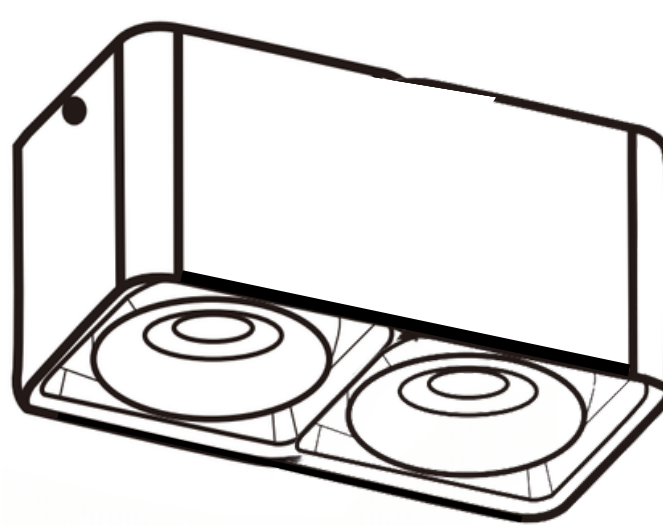

101.6 mm (4")

203.2 mm (8")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
POD1	8W	15D 15°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	WW White & White
POD2	16W	24D 24°					WB White & Black
		36D 36°					BW Black & White
		55D 55°					BB Black & Black
							** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
POD1-8W-36D-30K8-12RE-WW	≥ 720	≥ 90
POD2-16W-55D-30K8-12RE-BB	≥ 960	≥ 60



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


CYLINDER Series

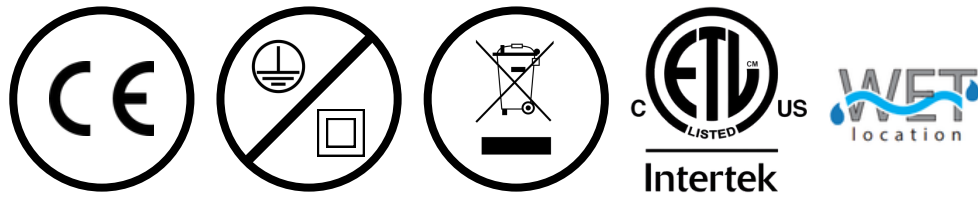

TECHNICAL INFORMATION:

Voltage Range	120 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1200 lm ~ 4000 lm
Efficiency	≥ 100 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface Pendant

DIMENSIONS:

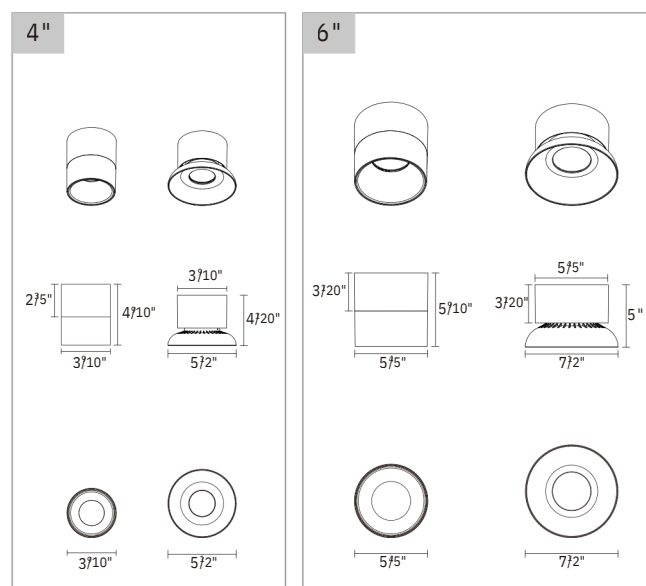

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
CYL4	4" 12W 18W 25W	15D 15°	3CCT 30K ~ 40K	8 80	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	RJSM Mount To Junction Box	W White
CYL6	6" 20W 30W 40W	24D 24°		9 90	27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	SJSM Mount With Conduit Cutout For Surface Mounted 4" Octagonal Junction Box	B Black
		36D 36°					** Other Options On Request
		60D 60°				N/A	

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
CYL4-12W-24D-3CCTK8-27RE-W	≥ 1 200	≥ 100
CYL6-40W-36D-3CCTK8-27RE-WB	≥ 4 000	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


ORBIS Series

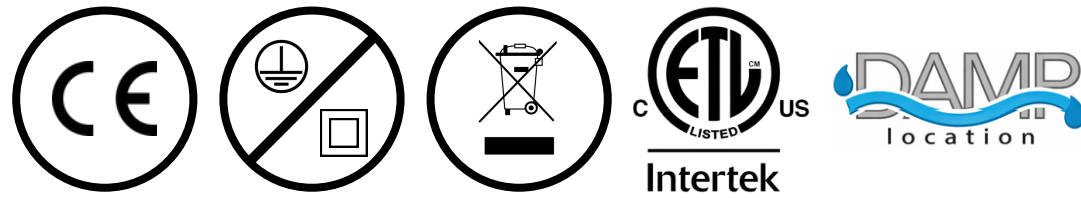

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	$\geq 700 \text{ lm} \sim 1800 \text{ lm}$
Efficiency	$\geq 100 \text{ lm/W}$
Dimming	TRIAC I Dimmable. 0 ~ 10 V
Lifetime	$\geq 50\,000 \text{ Hours}$
Mounting	Surface I Pendant

DIMENSIONS:

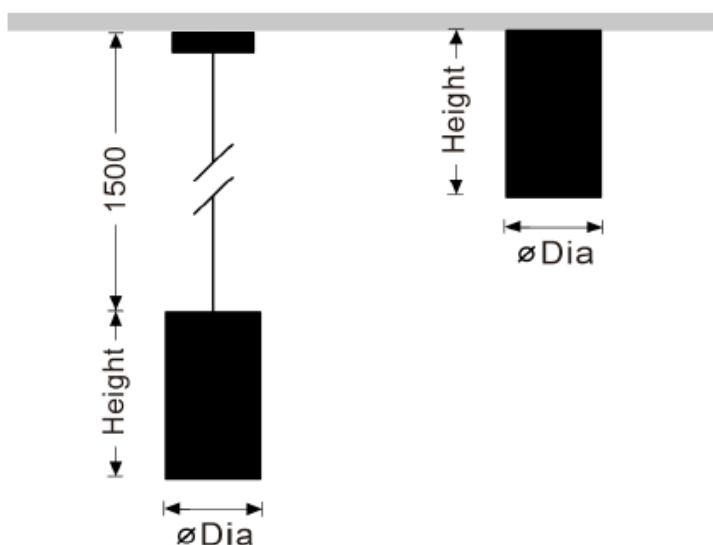

Model	R55	R75	R95
Diameter (Ø)	Ø55 (2.17")	Ø75 (2.95")	Ø95 (3.75")
H (Height)	100 (3.95")	130 (5.12")	140 (5.51")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
ORB55	Φ55x100 7W	15D 15°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	PMA Pendant Mount Accessories	WW White & White
ORB75	Φ75x130 12W	25D 25°	40K 4000K	9 90	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	WB White & Black
ORB95	Φ95x140 18W	30D 30°	50K 5000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		BB Black & Black
		45D 45°					BW Black & White
							** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
ORB55-7W-25D-30K9-12RE-WW	≥ 700	≥ 100
ORB75-12W-30D-40K9-12RE-BW	≥ 1 200	≥ 100
ORB95-18W-45D-50K9-12RE-WB	≥ 1 800	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú



Email:
info@moovillum.com

ORBIS 2 Series



OPTIONAL:


Pendant accessories: 4 Inch Ceiling Plate | 1mt Pendant Cable



TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 700 lm ~ 1200 lm
Efficiency	≥ 100 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface Pendant

DIMENSIONS:

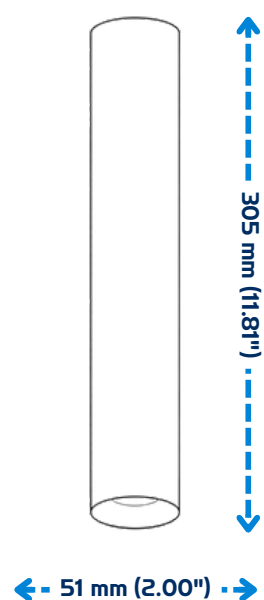

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
ORBL2	Φ50x300 7W	15D 15°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	PMA Pendant Mount Accessories	WW White & White
		25D 25°	40K 4000K	9 90	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	WB White & Black
		30D 30°	50K 5000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		BB Black & Black
		45D 45°					BW Black & White
							** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
ORBL55-7W-25D-30K9-12RE-WW	≥ 700	≥ 100
ORBL75-12W-30D-40K9-12RE-BW	≥ 1 200	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


KITCHENETTE Series

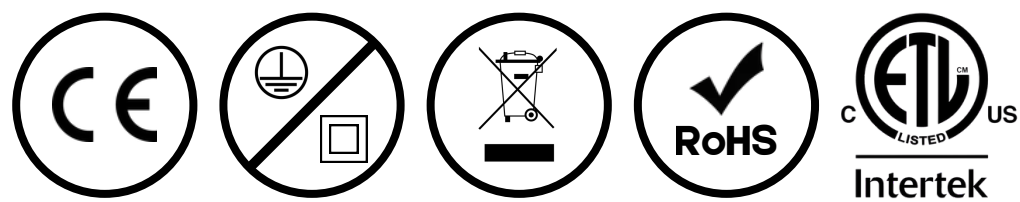

TECHNICAL INFORMATION:

Voltage Range	120 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1200 lm ~ 4000 lm
Efficiency	≥ 100 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Track

DIMENSIONS:

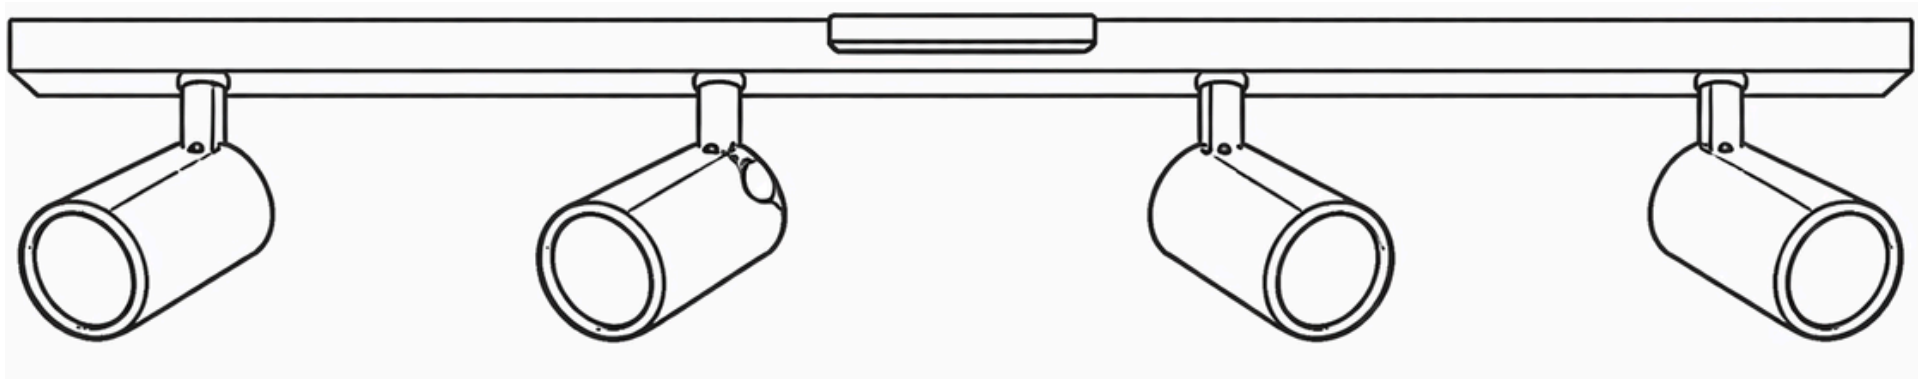

←----- 1220 mm (48.03") ----->

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
KT4	32W	15D 15°	3CCT 30K ~ 50K	8 80	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	W White
		24D 24°		9 90			B Black
		38D 38°					BN Brushed Nickel
		45D 45°					** Other Options On Request

REFERENCES:

REFERENCES:	(XXX)	
	LUMENS	LM/W
KT4-32W-38D-30K9-27RE-BN	≥ 1 000	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


TRACK 1 Series

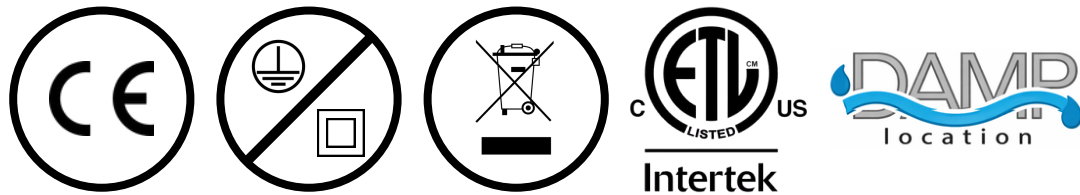

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1000 lm
Efficiency	≥ 100 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Track

DIMENSIONS:

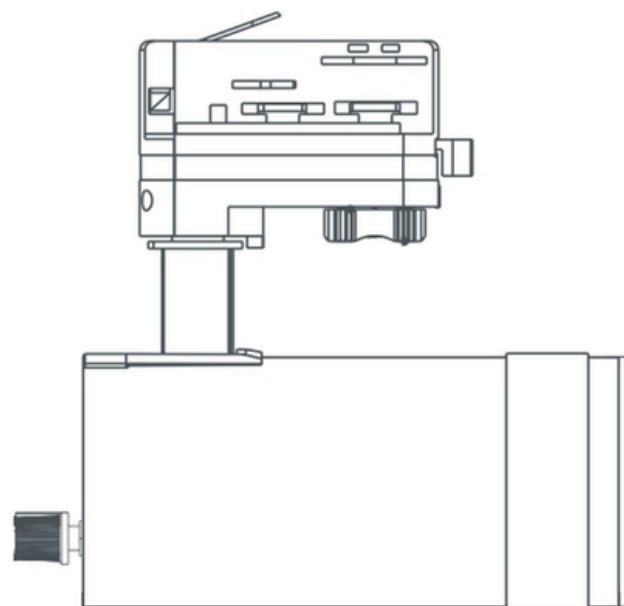

MODEL	
Diameter (Ø)	Ø50 mm (1.97")
H (Height)	150 mm (5.91")
L (Length)	213.5 mm (8.41")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
TRK01	10W	15D 15°	30K 3000K	9 90	12RE 120 VAC Dimmable TRIAC	N/A	W White
		24D 24°	40K 4000K				B Black
		36D 36°	50K 5000K				** Other Options On Request
		45D 45°					
		60D 60°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
TRK01-10W-36D-30K9-12RE-W	≥ 1 000	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com




TRACK 2 Series

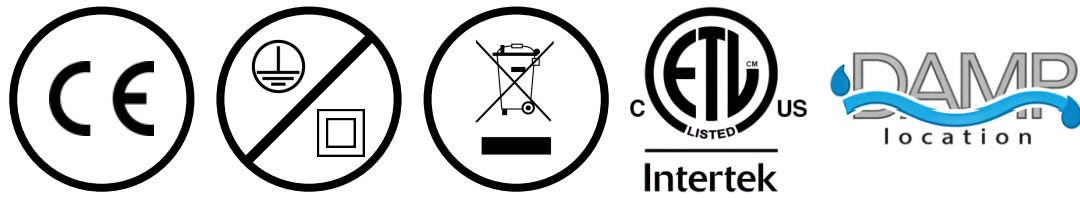

TECHNICAL INFORMATION:

Voltage Range	120 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1000 lm
Efficiency	≥ 100 lm/W
Dimming	TRIAC
Lifetime	≥ 50 000 Hours
Mounting	Track

DIMENSIONS:

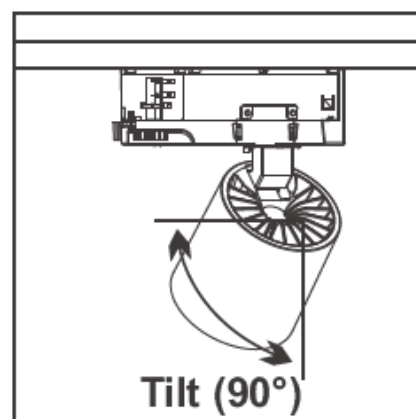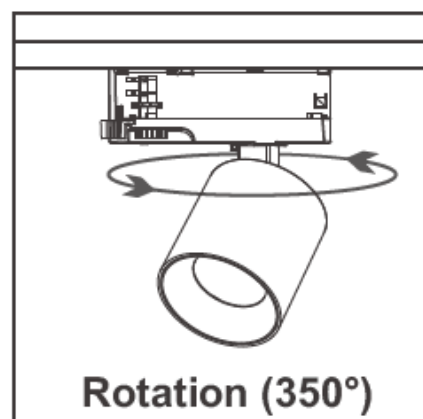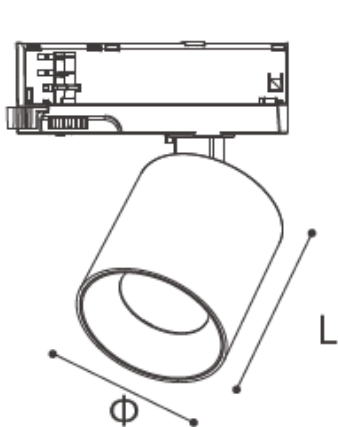

Watt (W)	Size (mm)
10W	Ø: 78mm (2.36") L: 85 mm (2.62")
20W	Ø: 88 mm (2.95") L: 92 mm (3.07")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
TRK02	10W	15D 15°	30K 3000K	9 90	12RE 120 VAC Dimmable TRIAC	N/A	W White
	20W	24D 24°	40K 4000K		22RE 120 ~ 220 VAC Dimmable. 0 ~ 10 V		B Black
		36D 36°	50K 5000K				** Other Options On Request
		45D 45°					
		60D 60°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
TRK02-10W-36D-30K9-12RE-W	≥ 1 000	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


CITRINE Series

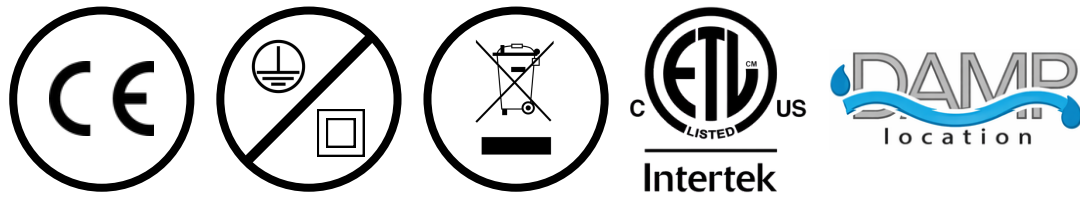

TECHNICAL INFORMATION:

Voltage Range	120 VAC 120-277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1500 lm ~ 3000 lm
Efficiency	≥ 100 lm/W
Dimming	TRIAC I Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

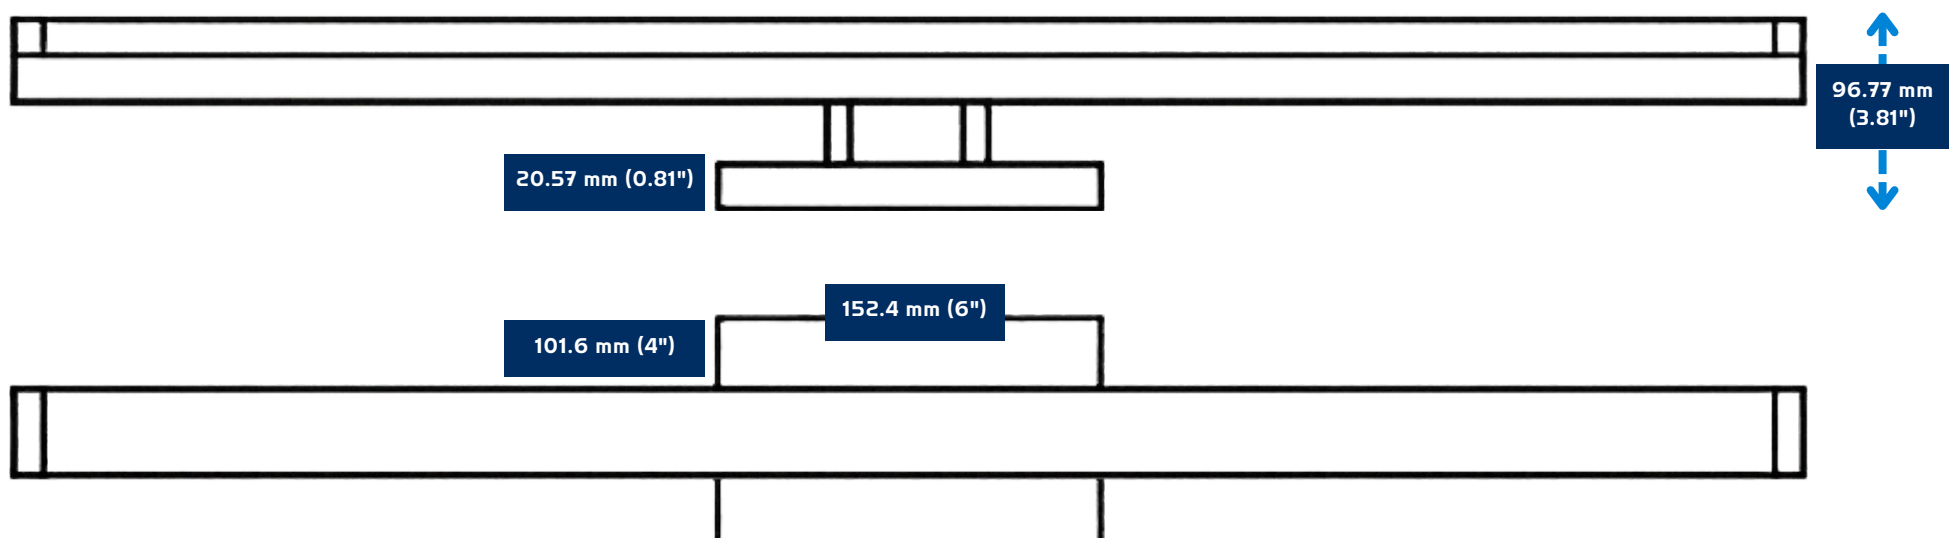

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
CTN24 24 Inches	15W	120D 120°	3CCT 30K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	BN Brushed Nickel
CTN36 36 Inches	30W				27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request
					27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		

REFERENCES:

REFERENCES:	(3000K)	
	LUMENS	LM/W
CNT24-15W-120D-3CCTK8-12RE-BN	≥ 1500	≥ 100
CNT36-30W-120D-3CCTK8-27RE-BN	≥ 3000	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


OBSIDIAN Series

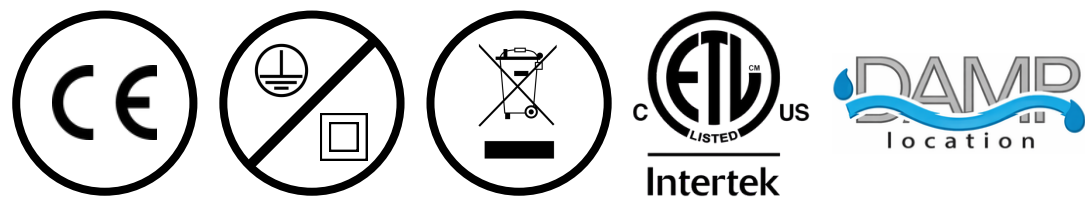

TECHNICAL INFORMATION:

Voltage Range	120 VAC 120 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 840 lm ~ 1080 lm
Efficiency	≥ 60 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

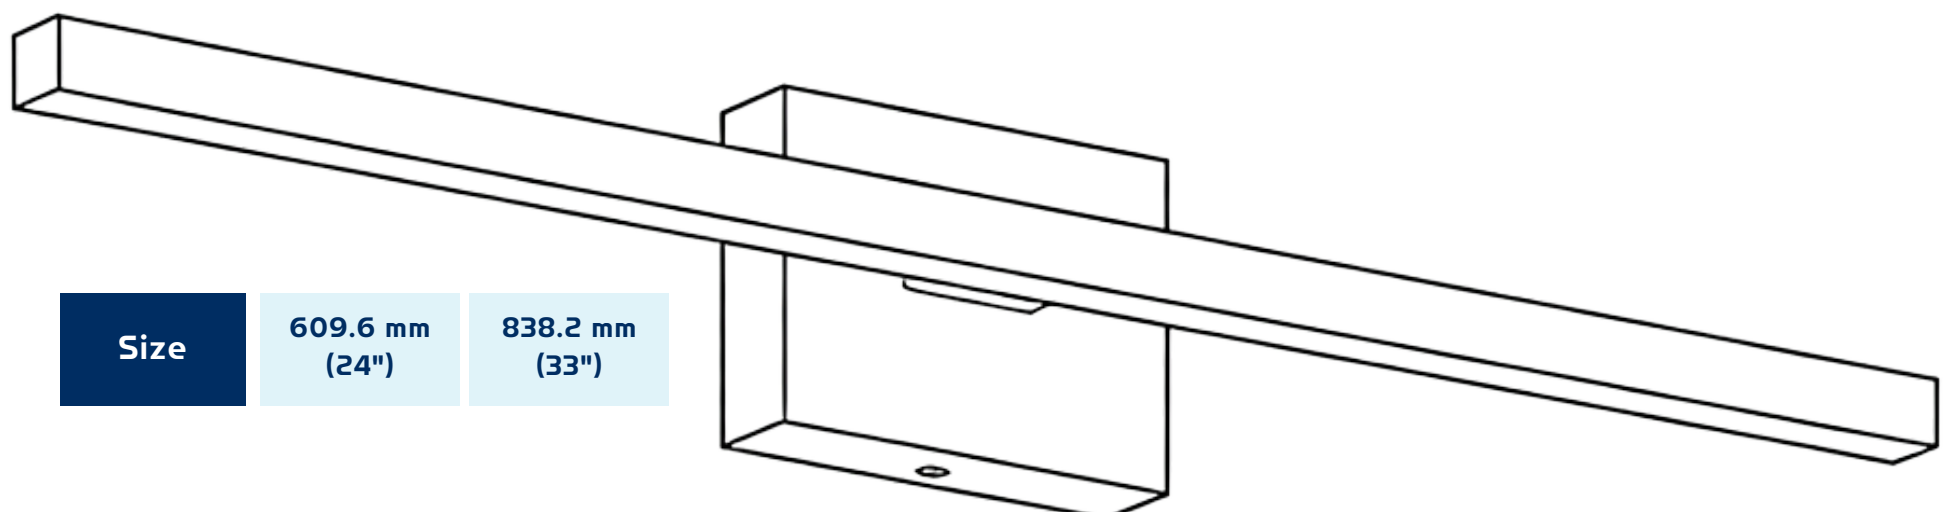

Size

609.6 mm
(24")

838.2 mm
(33")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
OBS24 24 Inches	14W	120D 120°	3CCT 30K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	W White
OBS33 33 Inches	18W				27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V		B Black
					27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
OBS24-14W-120D-3CCTK8-12RE-W	≥ 840	≥ 60
OBS33-18W-120D-3CCTK8-27RE-B	≥ 1 080	≥ 60



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


SELENITE Series

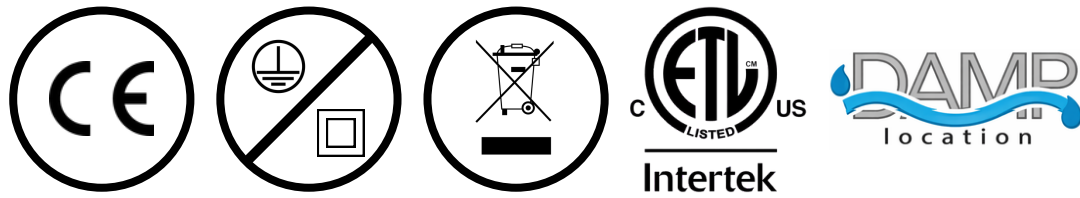

TECHNICAL INFORMATION:

Voltage Range	120 VAC 120 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1600 lm ~ 2300 lm
Efficiency	≥ 90 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

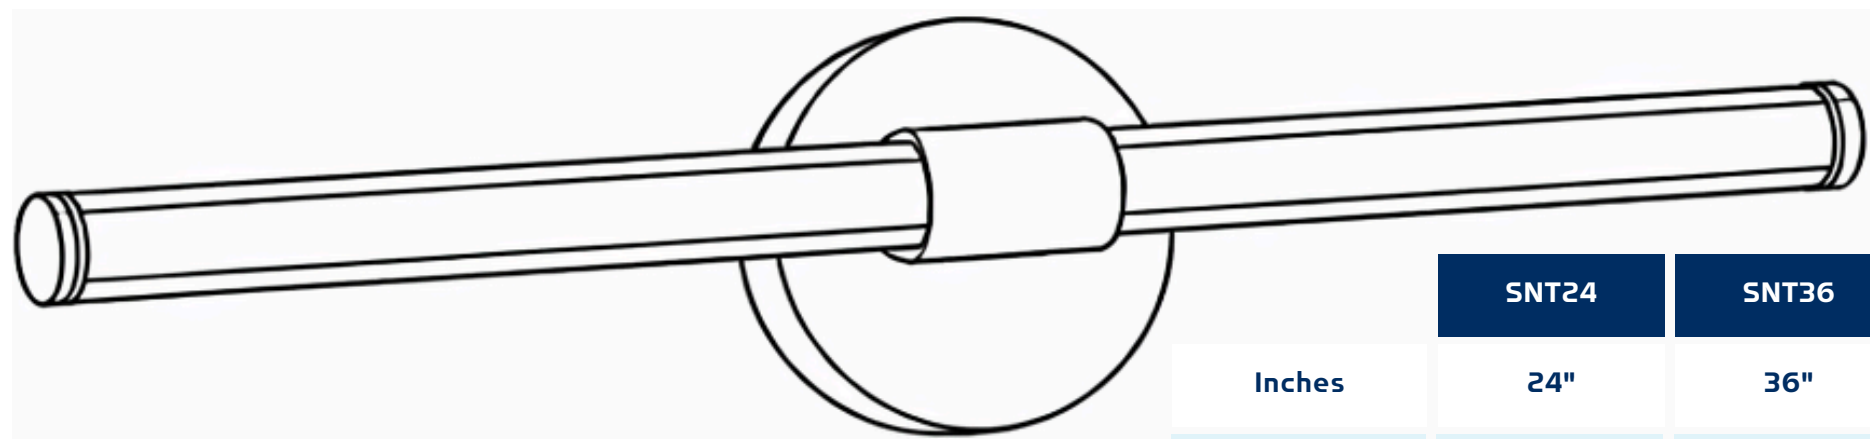

	SNT24	SNT36
Inches	24"	36"
Millimeters	609.6 mm	914.4 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
SNT24 24 Inches	18W	120D 120°	3CCT 30K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	G Gold
SNT36 36 Inches	26W				27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V		B Black
					27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
SNT24-18W-120D-3CCTK8-12RE-G	≥ 1 600	≥ 90
SNT36-26W-120D-3CCTK8-27RE-B	≥ 2 300	≥ 90



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


BORNITE Series

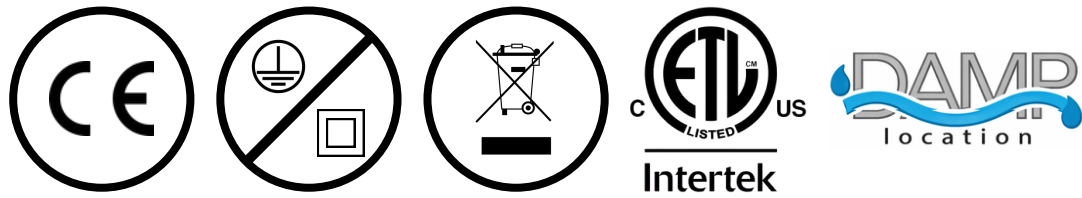

TECHNICAL INFORMATION:

Voltage Range	120 VAC 120 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 2100 lm ~ 2800 lm
Efficiency	≥ 95 lm/W ~ 120 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

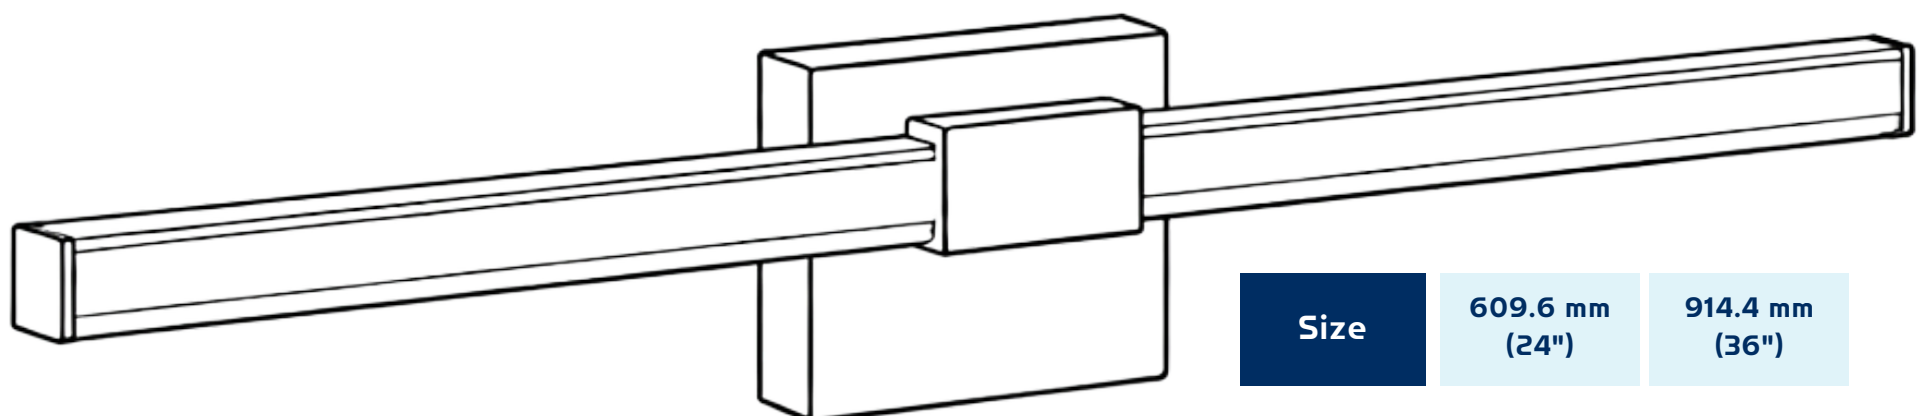

Size

609.6 mm
(24")

914.4 mm
(36")

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
BRN24 24 Inches	18W	120D 120°	3CCT 30K ~ 50K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	G Gold
BRN36 36 Inches	30W				27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V		B Black
					27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
BRN24-18W-120D-3CCTK8-12RE-B	≥ 2 100	≥ 120
BRN36-30W-120D-3CCTK8-12RE-B	≥ 2 800	≥ 95



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com



LINEAR Series

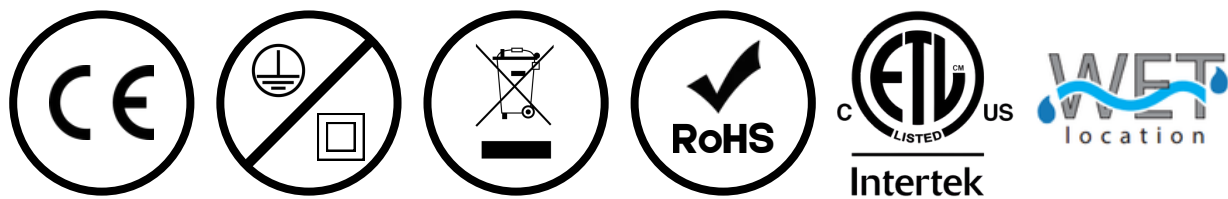

TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 6000 lm
Efficiency	≥ 135 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface

DIMENSIONS:

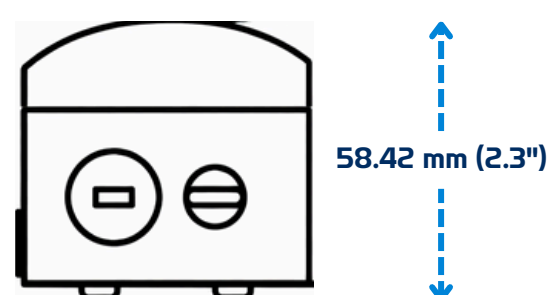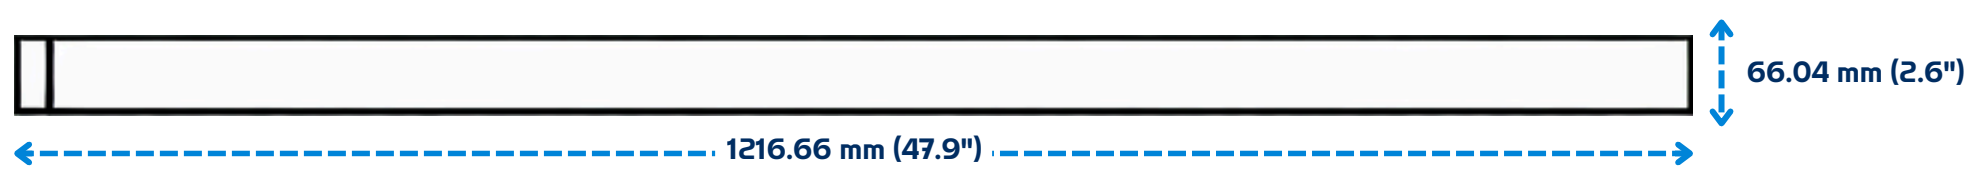

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
MLF04	22W	120D 120°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	EB Emergency Battery	W White
	28W		40K 4000K		27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	IB Integral Battery	** Other Options On Request
	34W		50K 5000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	SE Occupancy Sensor	
	45W						N/A

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
MFL04-22W-120D-40K8-27RE-W	≥ 6 000	≥ 135



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


LINEAR 2 Series

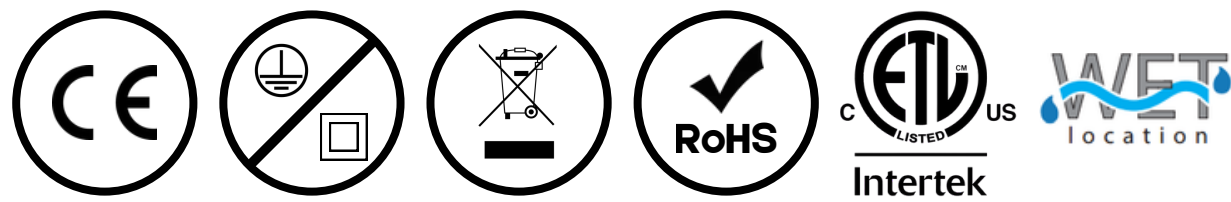

TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 6000 lm
Efficiency	≥ 100 lm/W ~ 200 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface

DIMENSIONS:

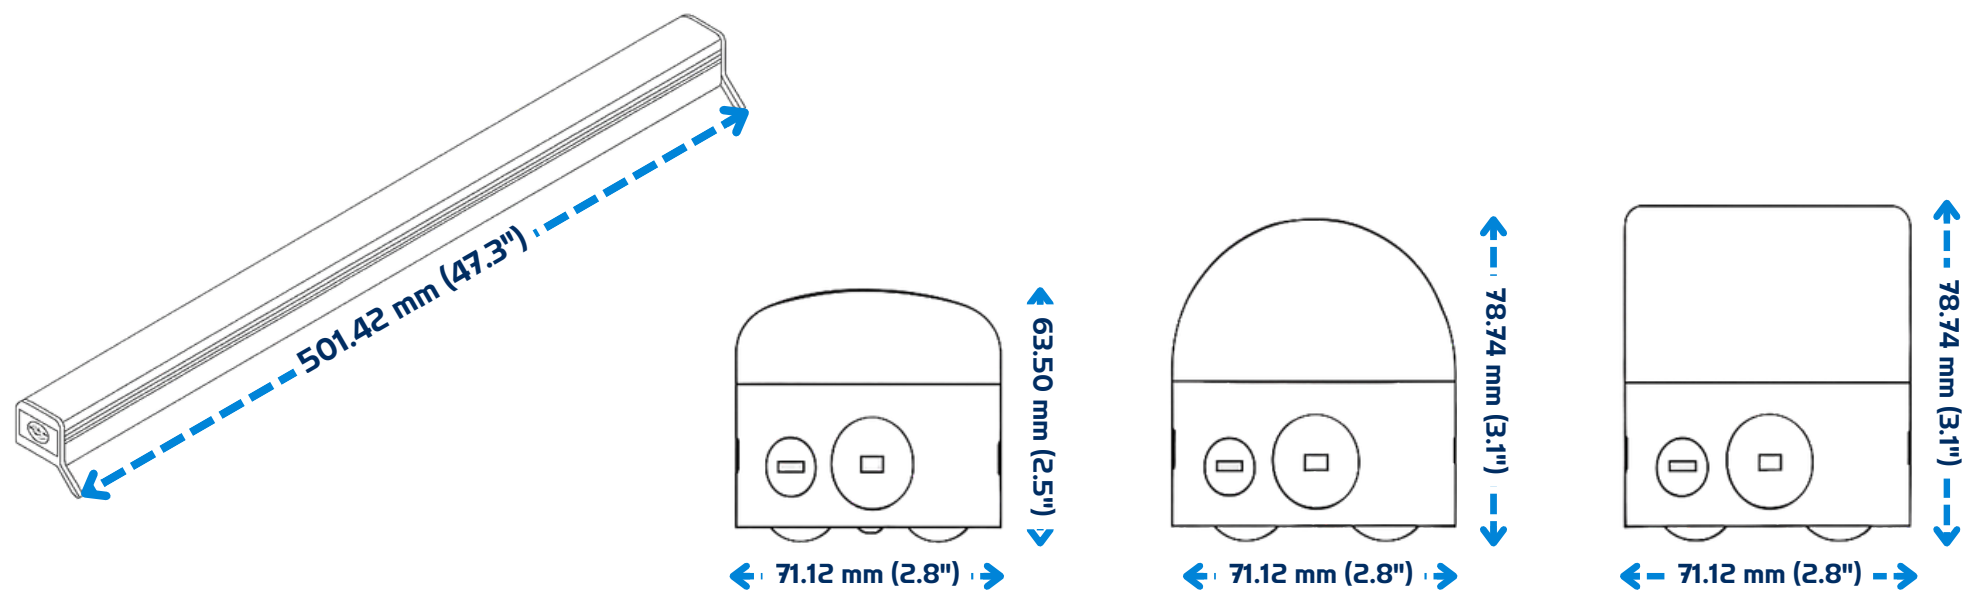

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
ST4	25W	120D 120°	30K 3000K	7 70	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
	30W		35K 3500K	8 80			
	40W		40K 4000K			N/A	
			50K 5000K				

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
ST4-25W-120D-35K8-27RE-W	≥ 3 250	≥ 130
ST4-30W-120D-40K8-27RE-W	≥ 3 900	≥ 130
ST4-40W-120D-40K8-27RE-W	≥ 5 200	≥ 130



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


VAPOR Series

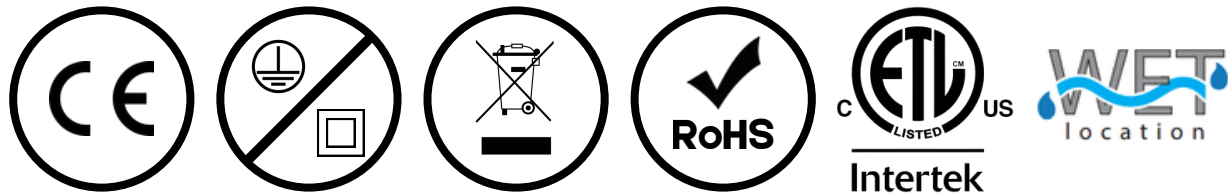

TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 6000 lm
Efficiency	≥ 100 lm/W ~ 200 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface

DIMENSIONS:

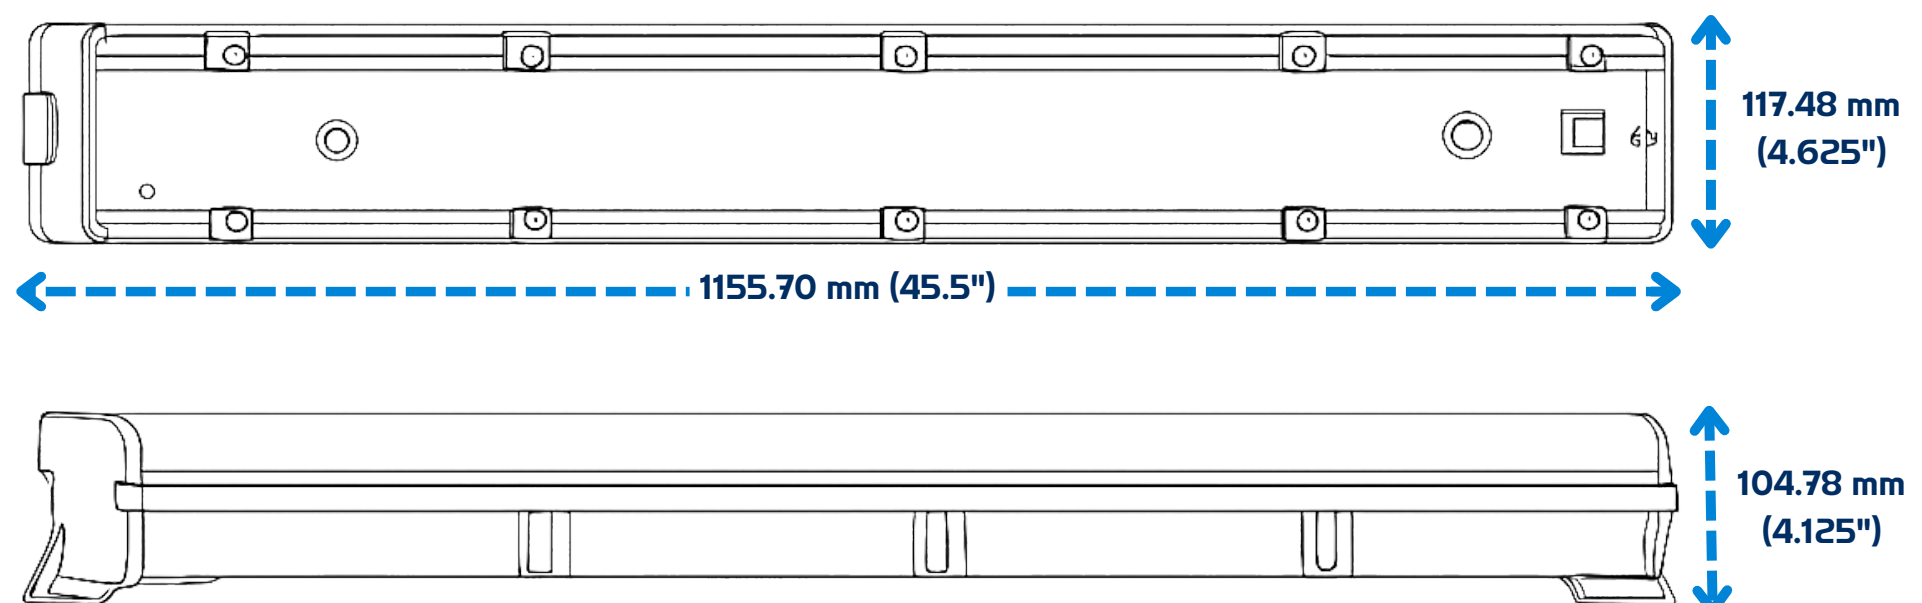

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
VT04	35W	120D 120°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	EB Emergency Battery	W White
	50W		35K 3500K		27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	** Other Options On Request
			40K 4000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V		
			50K 5000K				

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
VT04-35W-120D-40K8-27RE-W	≥ 4 550	≥ 130
VT04-50W-120D-40K8-27RE-W	≥ 6 000	≥ 120



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


ZETA Series

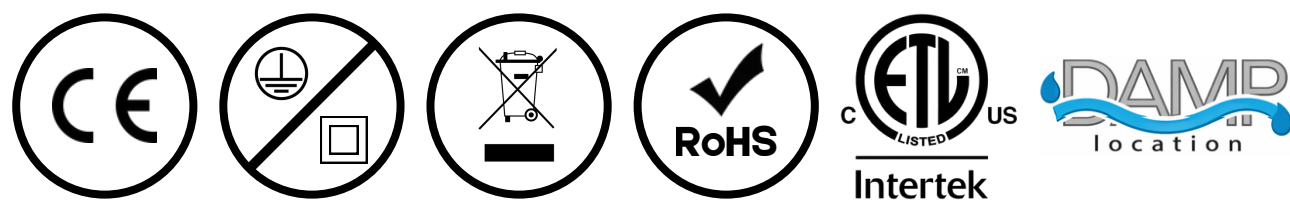


TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1600 lm ~ 2300 lm
Efficiency	≥ 100 lm/W ~ 200 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface Pendant Recessed

DIMENSIONS:

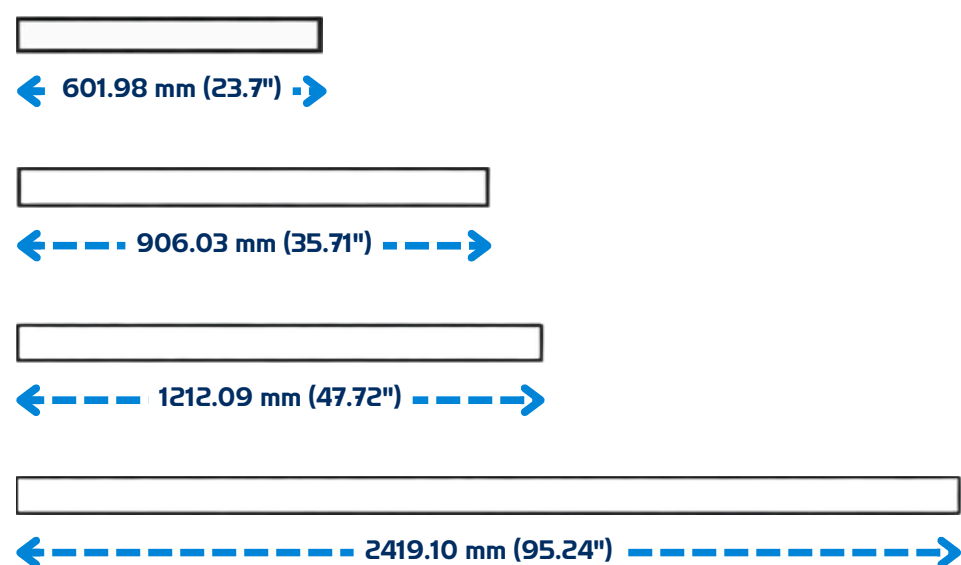

OPTICS:

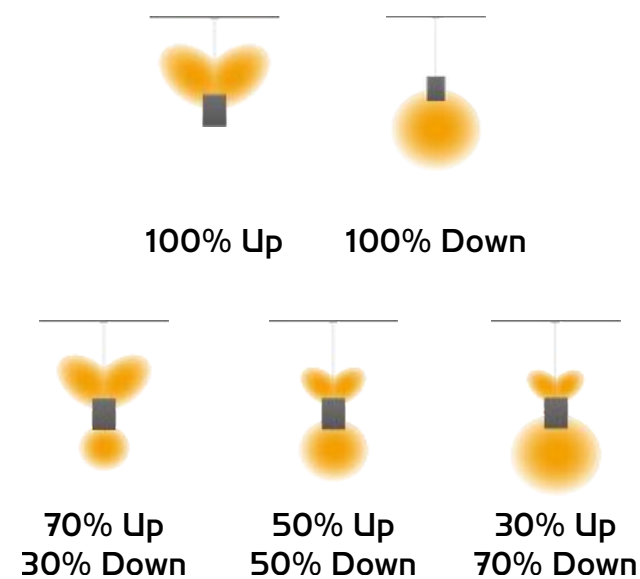

CONFIGURATION:

MODEL	LENGTH	POWER	OPTICS	CCT	CRI	DRIVER	MOUNTING	ACCESSORIES	COLOR
ZTA	2 FT	20W	Difusor	27K 2700K	8 80	12RE 120 VAC Dimmable TRIAC	RT Recessed Trimless	SK Suspension Kit	W White
	3 FT	34W	Louver	30K 3000K	9 90	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	RF Recessed Flanged	EB Emergency Battery	B Black
	4 FT	40W	Reflector	35K 3500K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	P Pendant	SE Occupancy Sensor	G Grey
	6 FT	80W	Convex	40K 4000K		** Other Options On Request		N/A	S Silver
	8 FT								

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
ZTA-2FT-20W-D-27K8-12RE-RT-SK-W	≥ 2 200	≥ 110
ZTA-3FT-34W-L-30K9-27RE-RF-EB-B	≥ 3 750	≥ 110
ZTA-4FT-40W-R-35K9-27RE-P-SE-G	≥ 5 000	≥ 110



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127



St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com

RING D Series

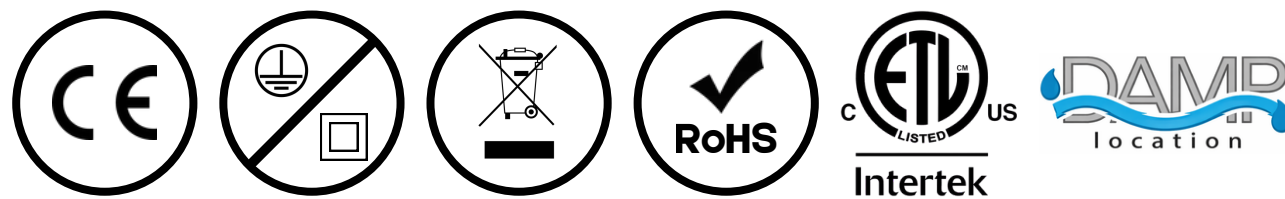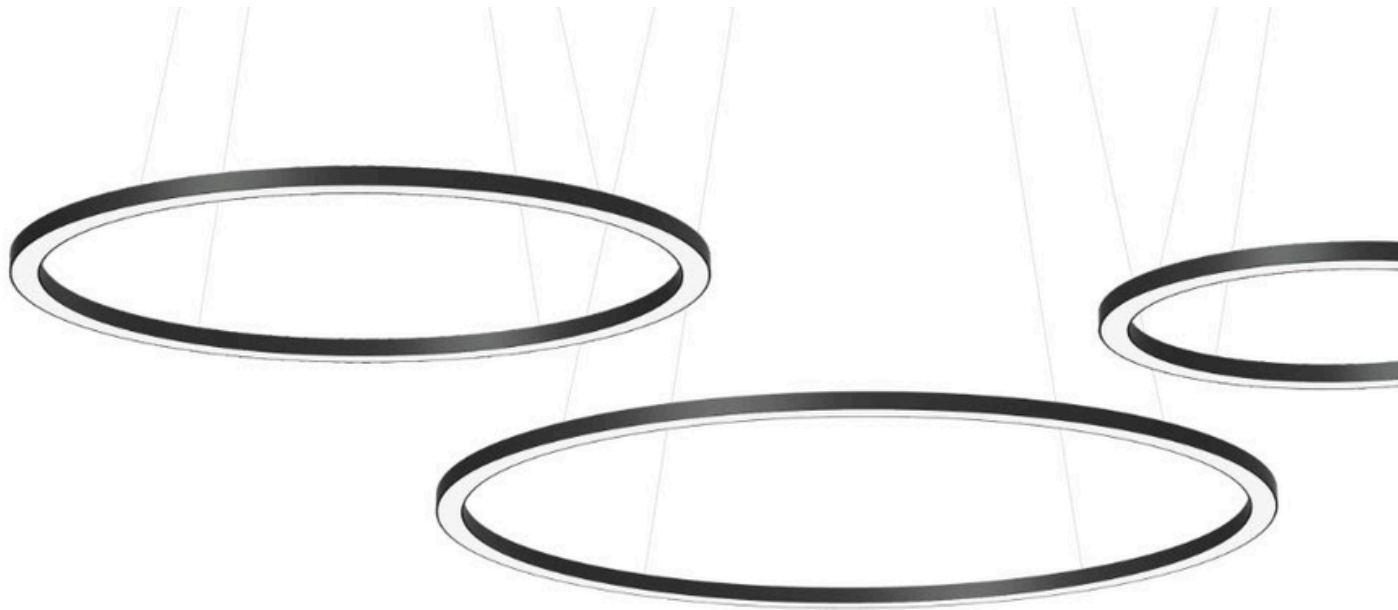


TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 2640 lm ~ 7920 lm
Efficiency	≥ 110 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Pendant Surface

DIMENSIONS:

WIDTH	DIAMETER	W	LM/W	LM
40.64 mm 1.6"	Ø 610 mm (24")	24	≥ 110	2 640
	Ø 813 mm (32")	32		3 520
	Ø 1020 mm (40")	40		4 400
	Ø 1200 mm (47")	48		5 280
	Ø 1500 mm (59")	60		6 600
	Ø 1805 mm (71")	72		7 920



CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
RD24 24 Inches	24W	120D 120°	30K 3000K	8 80	27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	SK Suspension Kit	W White
RD32 32 Inches	32W		40K 4000K			N/A	B Black
RD40 40 Inches	40W		50K 5000K				** Other Options On Request
RD47 47 Inches	48W						
RD59 59 Inches	60W						
RD71 71 Inches	72W						

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
RD24-24W-120D-40K8-27RE-W	≥ 2 640	≥ 110



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127



St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


RING UD Series

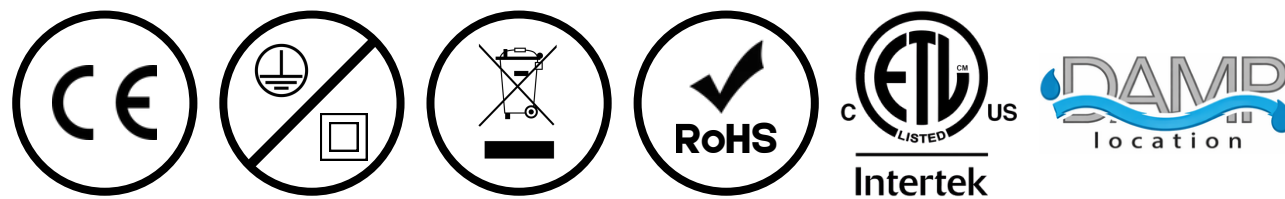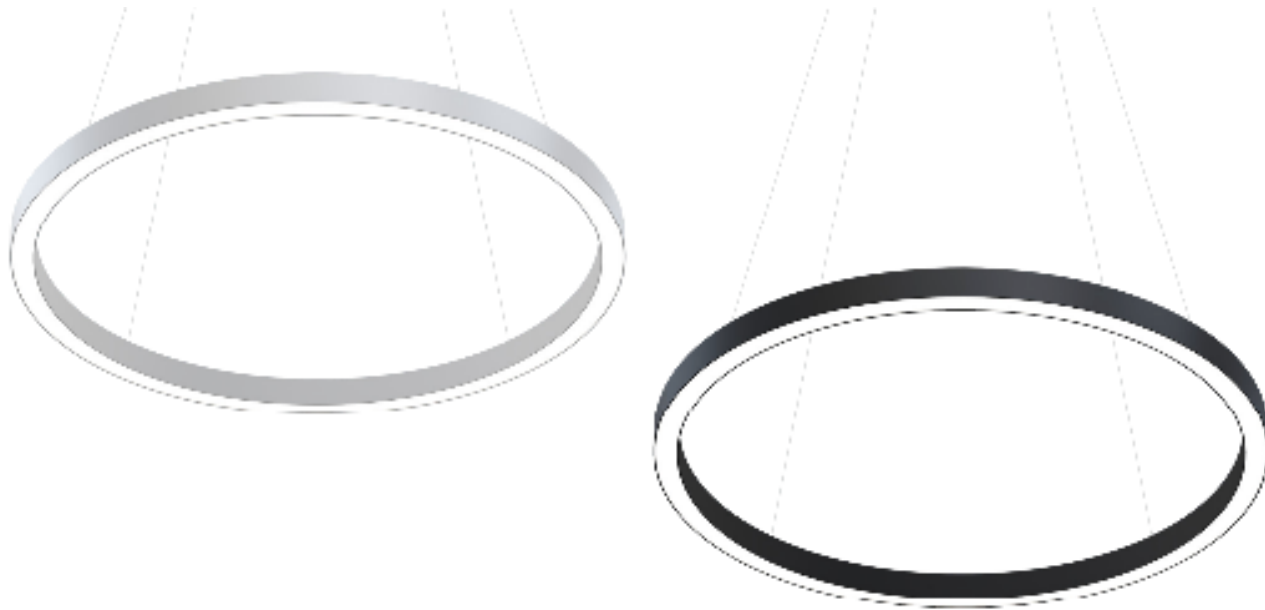

TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	3300 lm ~ 9900 lm
Efficiency	≥ 110 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Pendant Surface

DIMENSIONS:

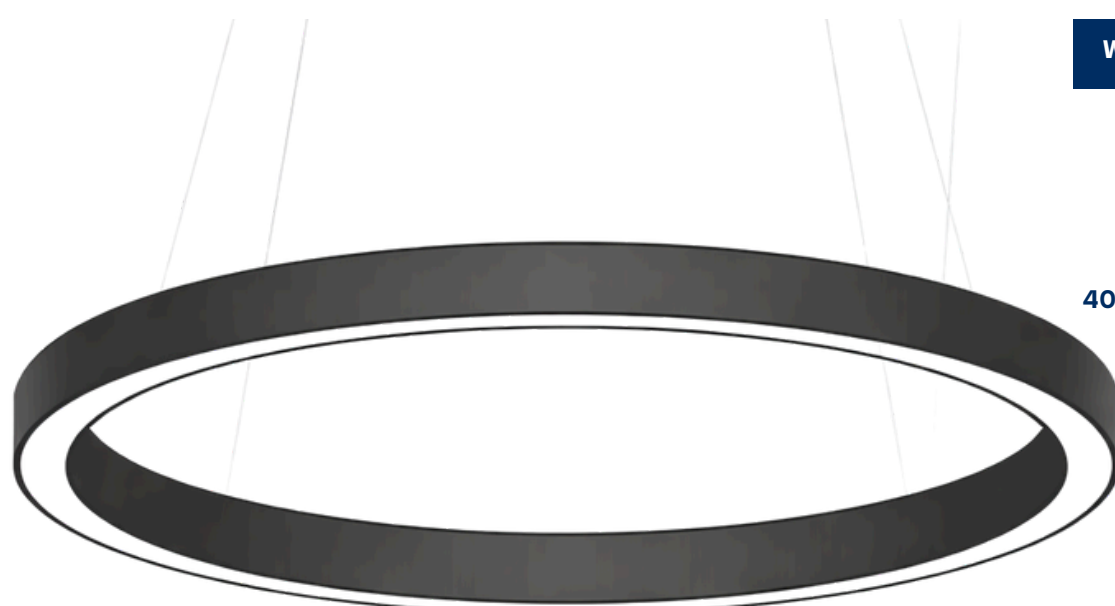

WIDTH	DIAMETER	W	LM/W	LM
	Ø 610 mm (24")	30		3 300
	Ø 813 mm (32")	40		4 400
	Ø 1020 mm (40")	50	≥ 110	5 500
	Ø 1200 mm (47")	60		6 600
	Ø 1500 mm (59")	75		8 250
	Ø 1805 mm (71")	90		9 900

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
RUD24 24 Inches	30W	120D 120°	30K 3000K	8 80	27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	SK Suspension Kit	W White
RUD32 32 Inches	40W		40K 4000K			N/A	B Black
RUD40 40 Inches	50W		50K 5000K				** Other Options On Request
RUD47 47 Inches	60W						
RUD59 59 Inches	75W						
RUD71 71 Inches	90W						

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
RUD24-30W-120D-40K8-27RE-W	≥ 3 300	≥ 110



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127



St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


RING IN Series

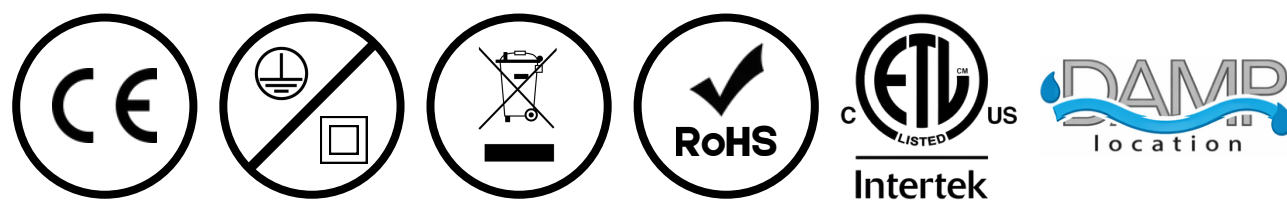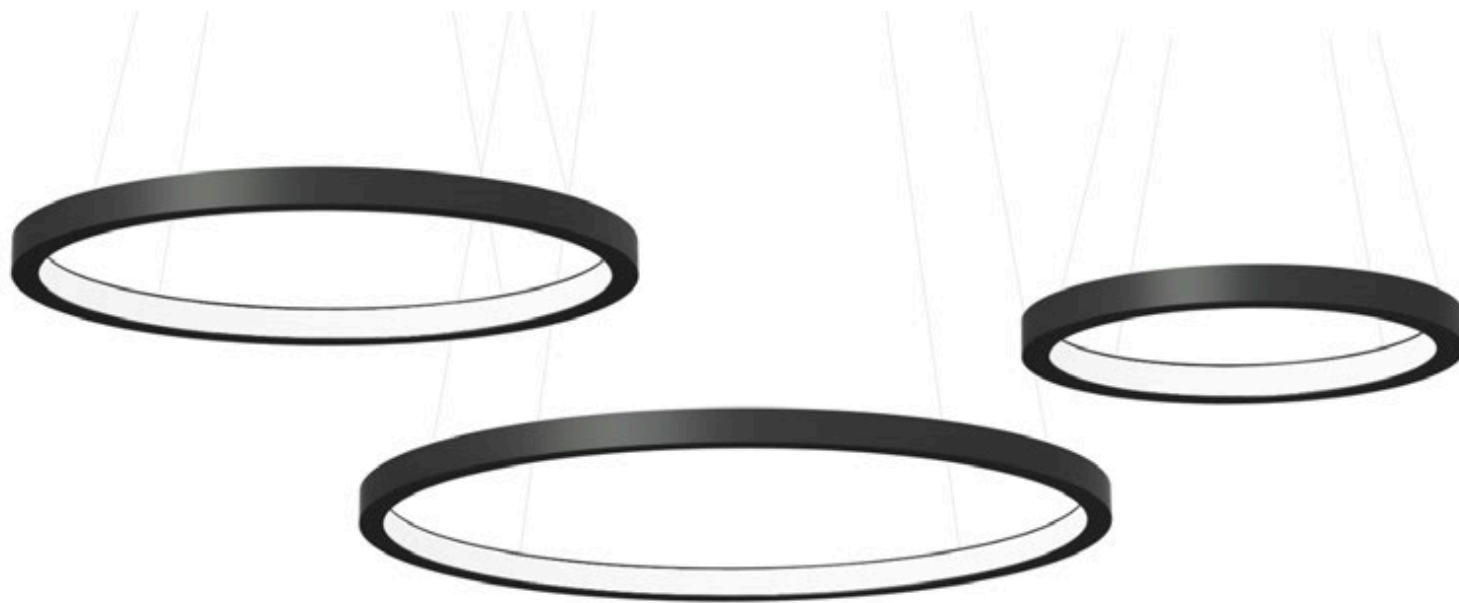

TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	2400 lm ~ 7200 lm
Efficiency	≥ 100 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Pendant Surface

DIMENSIONS:

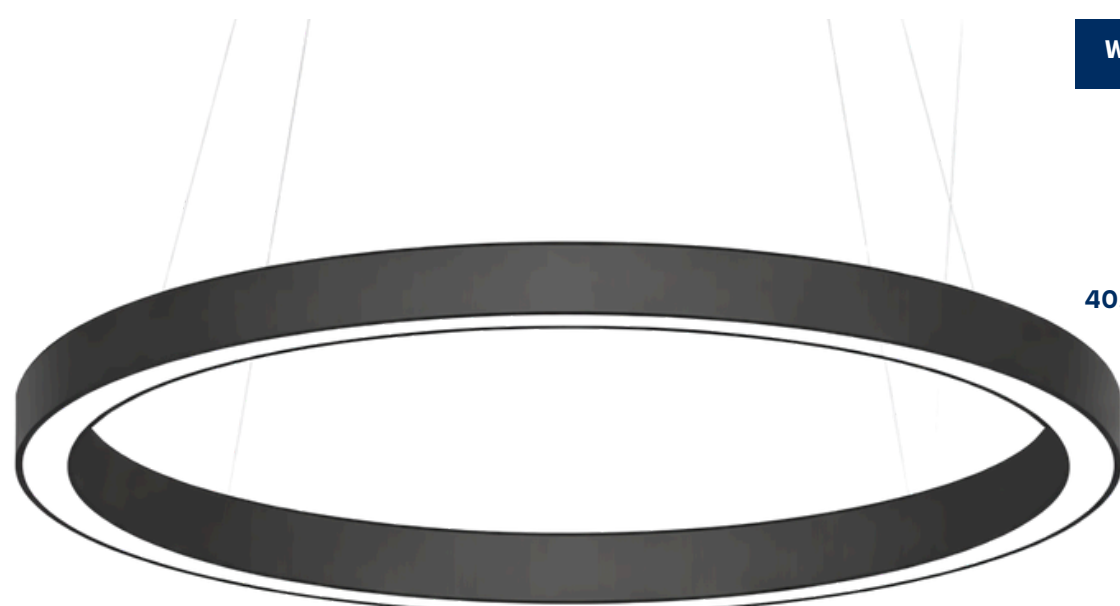

WIDTH	DIAMETER	W	LM/W	LM
	Ø 610 mm (24")	24		2 400
	Ø 813 mm (32")	32		3 200
	Ø 1020 mm (40")	40	≥ 110	4 000
	Ø 1200 mm (47")	48		4 800
	Ø 1500 mm (59")	60		6 000
	Ø 1805 mm (71")	72		7 200

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
RIN24 24 Inches	24W	120D 120°	30K 3000K	8 80	27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	SK Suspension Kit	W White
RIN32 32 Inches	32W		40K 4000K			N/A	B Black
RIN40 40 Inches	40W		50K 5000K				** Other Options On Request
RIN47 47 Inches	48W						
RIN59 59 Inches	60W						
RIN71 71 Inches	72W						

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
RIN24-24W-120D-40K8-27RE-W	≥ 2 400	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


META Series

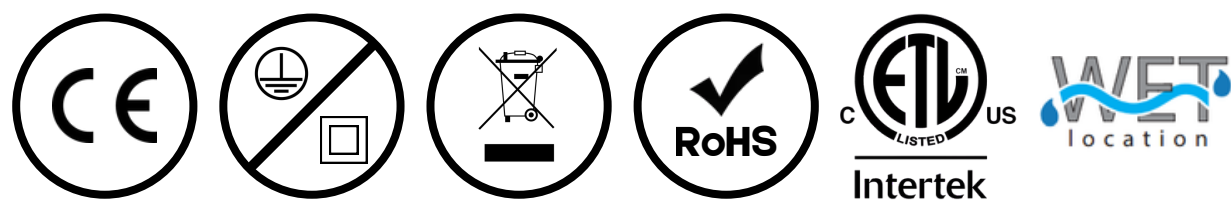

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 6000 lm
Efficiency	≥ 150 lm/W ~ 300 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Pendant

DIMENSIONS:

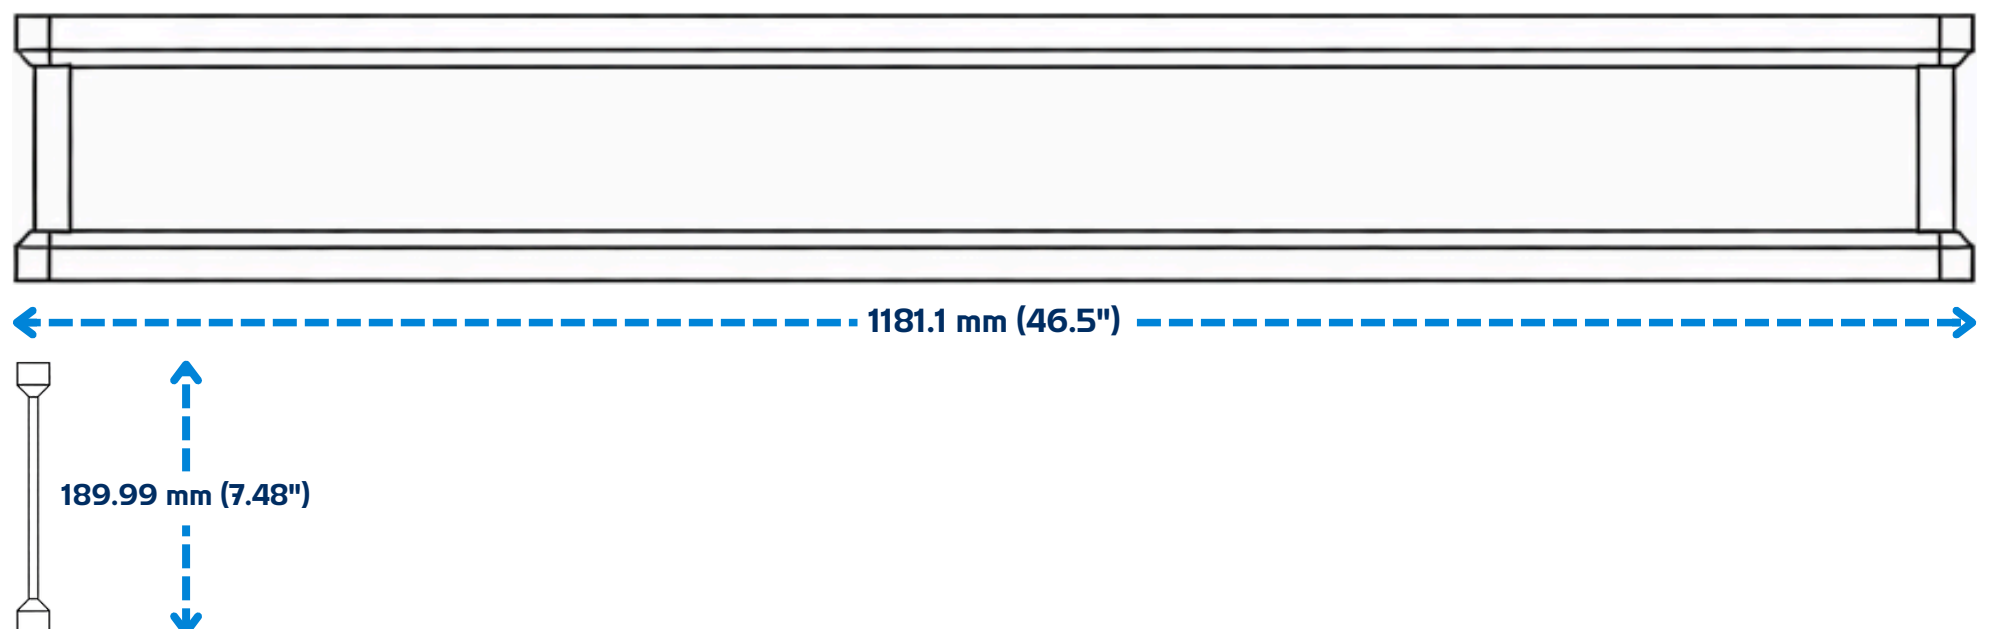

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
MTAV 4 FT	20W	Diffuser	30K 3000K	8 80	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	SC Square Canopy	S Silver
	30W	Louver	35K 3500K			RC Round Canopy	** Other Options On Request
	40W		40K 4000K			N/A	

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
MTAV-40W-D-40K8-27RE-SC-S	≥ 6 000	≥ 150



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


META SQUARE Series

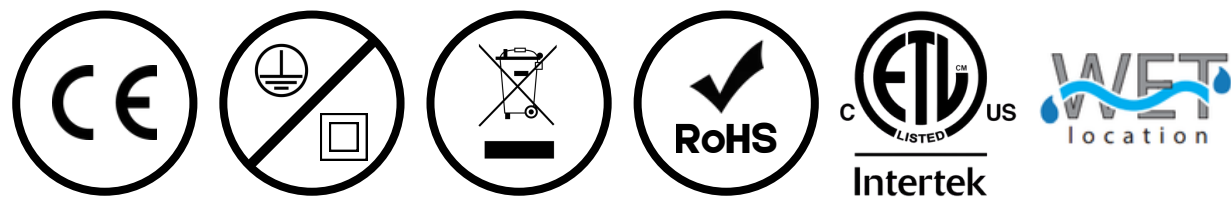

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 6000 lm
Efficiency	≥ 150 lm/W ~ 300 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Pendant

DIMENSIONS:

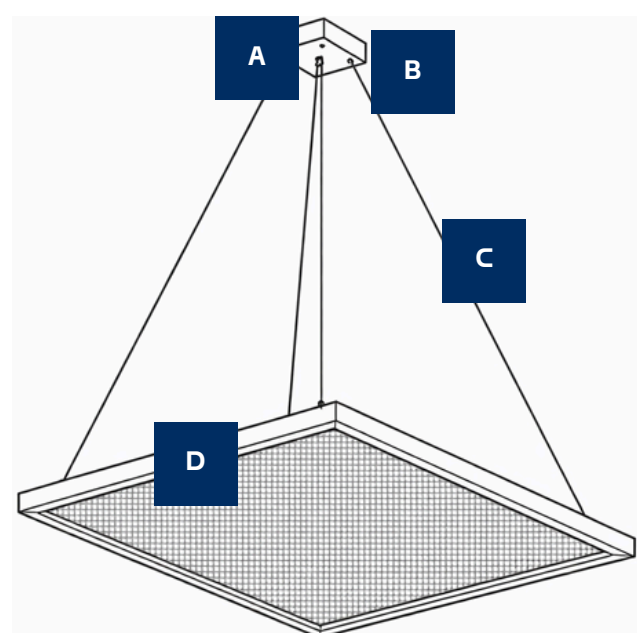

BRACKET		
	Inches	MM
A	5.7"	144.78 mm
B	1.77"	44.96 mm

LIGHT FIXTURE		
	Inches	MM
D	24"	609.6 mm
E	0.83"	21.08 mm

SUSPENSION KIT		
	Feet	MM
D	8'	2438.4 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
MTAS 24" X 24"	20W	120D 120°	30K 3000K	8 80	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
	30W		35K 3500K			N/A	B Black
	40W		40K 4000K				** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
MTAS-40W-120D-40K8-27RE-B	≥ 1 000	≥ 150



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


PARKING Series

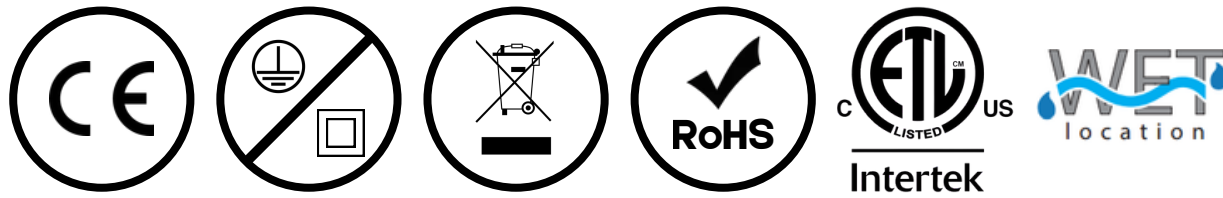

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 9000 lm
Efficiency	≥ 150 lm/W ~ 300 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface Pendant

DIMENSIONS:

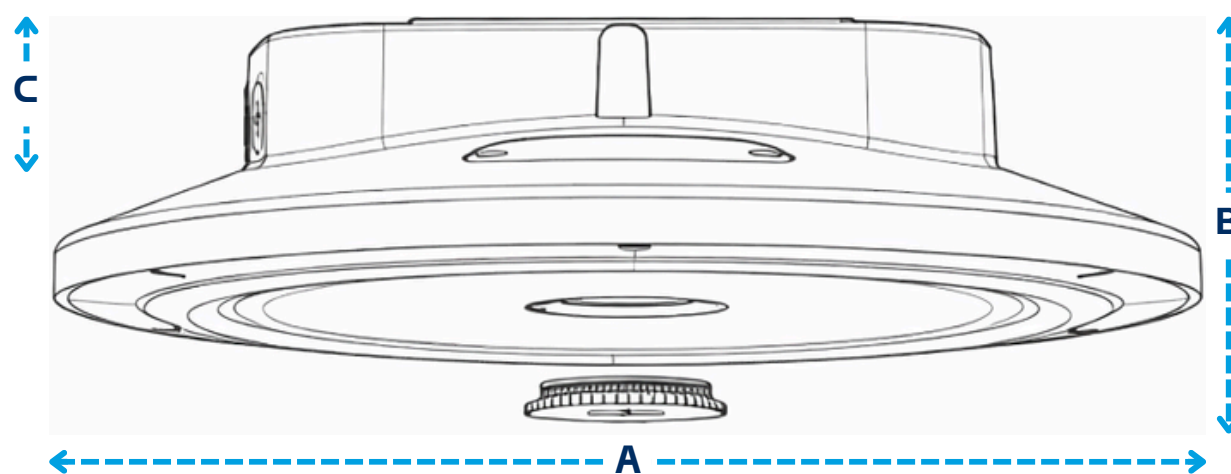

	Inches	MM
A	Ø 12.00"	304.80 mm
B	12.00"	304.80 mm
C	3.32"	84.33 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
PK1	30W	T5 Type 5	30K 3000K	7 70	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
	45W		40K 4000K			SE Occupancy Sensor	** Other Options On Request
	60W		50K 5000K			SK Suspension Kit	
						N/A	

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
PK1-30W-T5-30K7-27RE-W	≥ 4 500	≥ 150
PK1-45W-T5-40K7-27RE-EB-W	≥ 6 750	≥ 150
PK1-60W-T5-50K7-27RE-SE-W	≥ 9 000	≥ 150



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


GARAGE Series

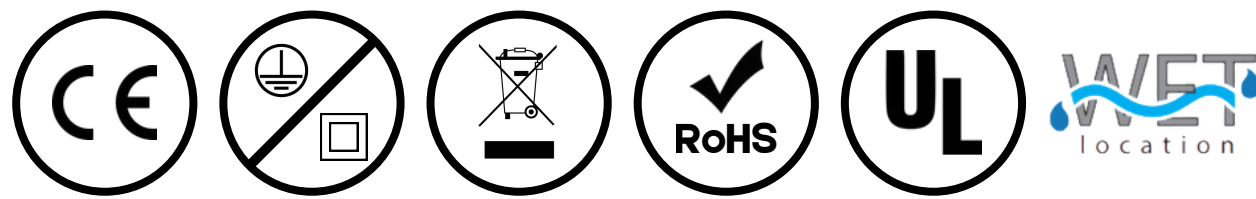

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 9400 lm
Efficiency	≥ 150 lm/W ~ 300 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface I Pendant

DIMENSIONS:

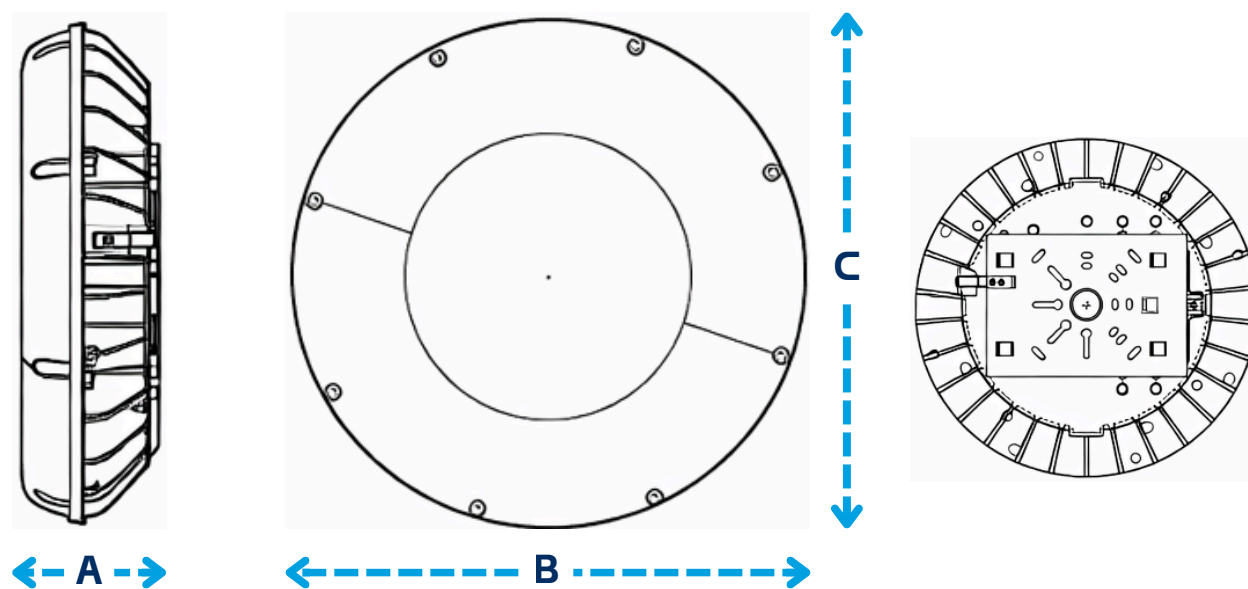

	Inches	MM
A	3.32"	84.33 mm
B	Ø 12.00"	304.80 mm
C	12.00"	304.80 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
GA1	30W	120D 120°	30K 3000K	7 70	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
	45W		40K 4000K	8 80		SE Occupancy Sensor	** Other Options On Request
	60W		50K 5000K			SK Suspension Kit	
						N/A	

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
GA1-30W-120D-40K7-27RE-W	≥ 4 050	≥ 135
GA1-45W-120D-40K7-27RE-SE-W	≥ 6 075	≥ 135
GA1-60W-120D-50K7-27RE-EB-W	≥ 8 100	≥ 135



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com



GARAGE SQUARE Series

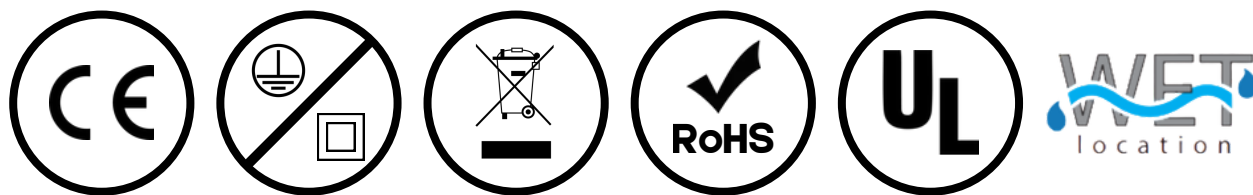

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 9400 lm
Efficiency	≥ 150 lm/W ~ 300 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface Pendant

DIMENSIONS:

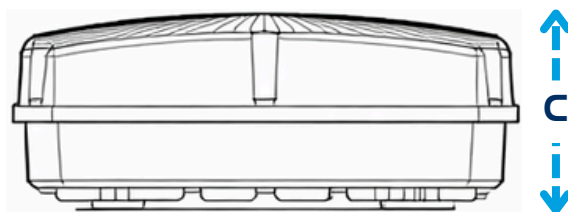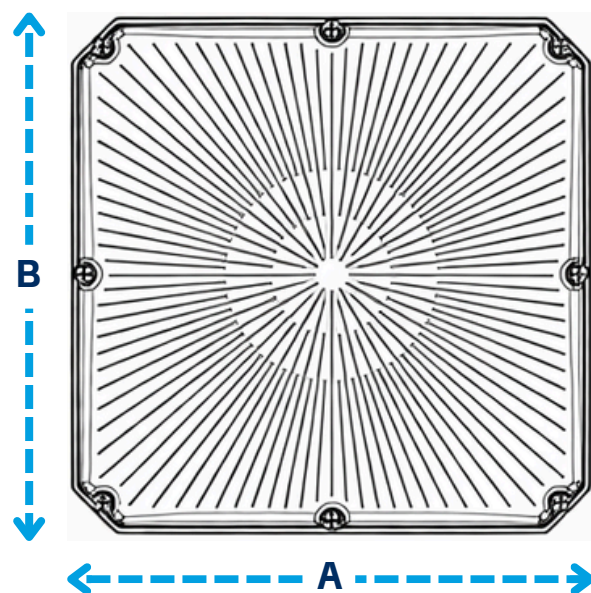

	Inches	MM
A	10.05"	255.27 mm
B	10.05"	255.27 mm
C	4.19"	106.43 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
GSQ	30W	155D 155°	30K 3000K	7 70	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
	45W		40K 4000K	8 80	35RE 120 ~ 347 VAC Dimmable. 0 ~ 10 V	MS Microwave Sensor	B Black
	60W		50K 5000K		48RE 277 ~ 480 VAC Dimmable. 0 ~ 10 V	SK Suspension Kit	** Other Options On Request
						N/A	

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
GSQ-30W-155D-30K8-27RE-EB-BW	≥ 6 000	≥ 200
GSQ-40W-155D-40K8-35RE-W	≥ 8 000	≥ 200
GSQ-60W-155D-50K8-48RE-MS-BW	≥ 9 000	≥ 150



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127



St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


GARAGE SQUARE 2 Series

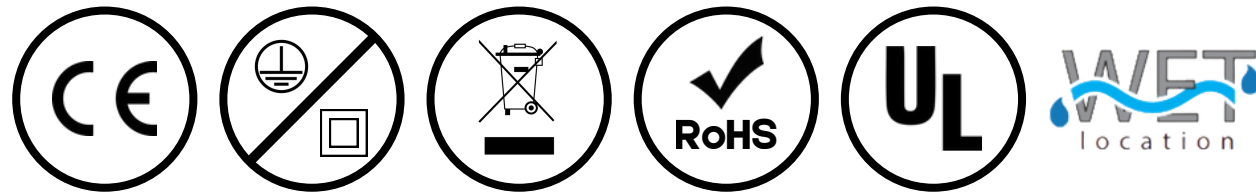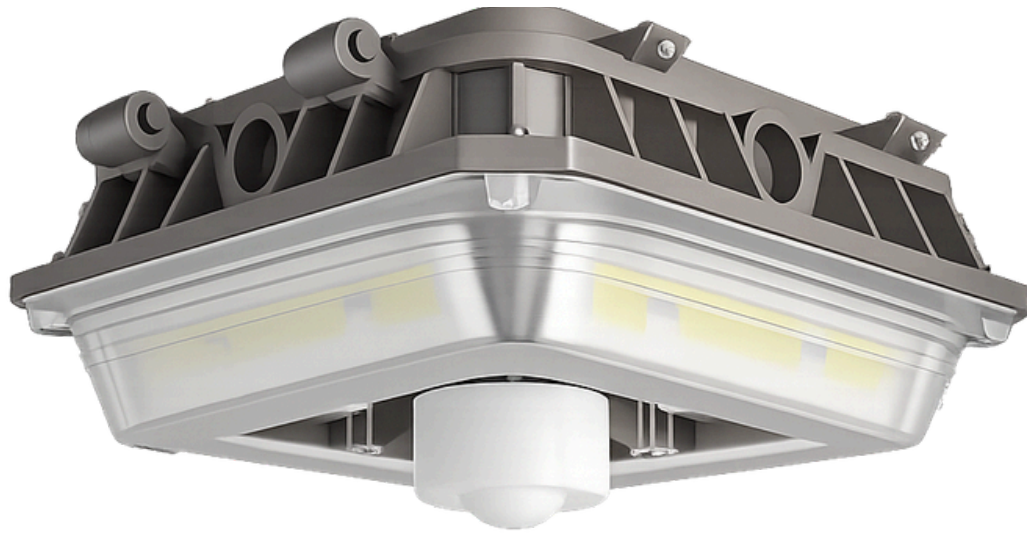

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 9400 lm
Efficiency	≥ 150 lm/W ~ 300 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface I Pendant

DIMENSIONS:

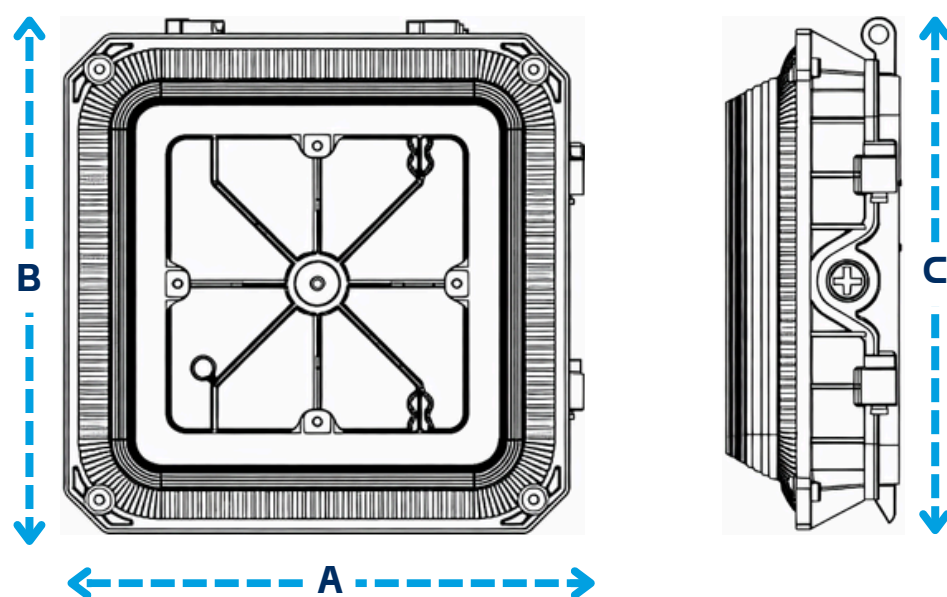

	Inches	MM
A	9.20"	233.68 mm
B	9.20"	233.68 mm
C	3.3"	83.82 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
GSQ2	30W	155D 155°	30K 3000K	7 70	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
	45W		40K 4000K	8 80		MS Microwave Sensor	B Black
	60W	50K 5000K		SK Suspension Kit	BZ Bronze		
				N/A	** Other Options On Request		

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
GSQ2-30W-155D-30K8-27RE-EB-BW	≥ 6 000	≥ 200
GSQ2-40W-155D-40K8-35RE-W	≥ 8 000	≥ 200
GSQ2-60W-155D-50K8-48RE-MS-BW	≥ 9 000	≥ 150



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


BRICKELL Series

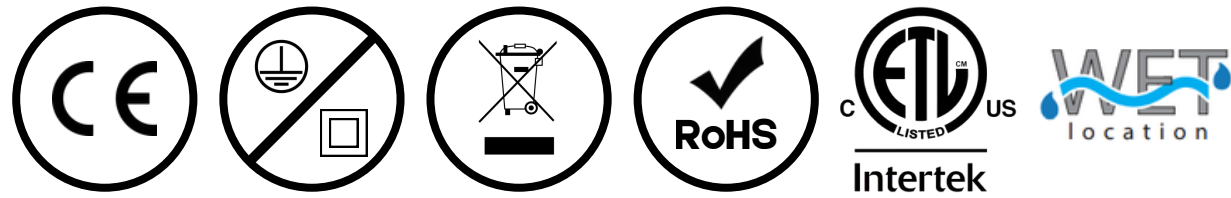

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 20000 lm
Efficiency	≥ 75 lm/W ~ 150 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

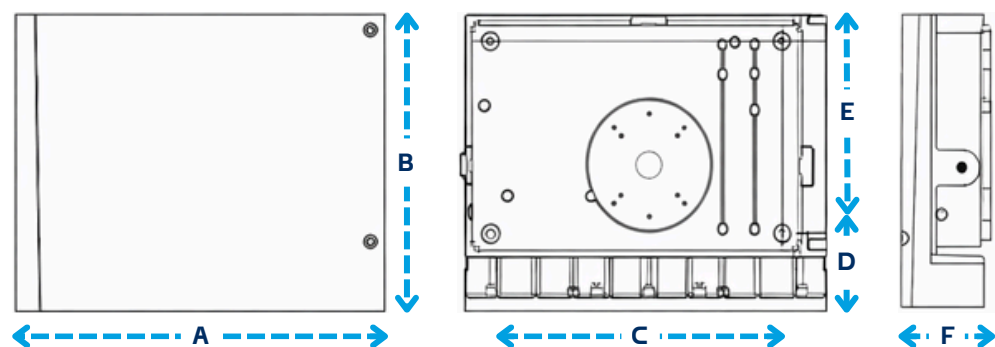

26W - 65W	A	B	C	D	E	F	100W - 135W	A	B	C	D	E	F
Inches	13.1"	9.6"	10.4"	2.6"	6.1"	3.8"	Inches	13.2"	9.6"	10.4"	2.6"	6.1"	5"
Milimeters	333 mm	244 mm	265 mm	67 mm	155 mm	97 mm	Milimeters	336 mm	244 mm	265 mm	67 mm	155 mm	127 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR	TREATMENT
BRK01 Series 1	26W	90°x120°	30K 3000K	7 70	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	BZ Bronze	A2 250h AISI 304
	38W		40K 4000K	8 80	27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	PH Photocell	** Other Options On Request	
	65W		50K 5000K			N/A		
BRK01 Series 2	100W							
	135W							

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
BRK01-65W-PC-30K7-27RE-EB-BZ-A2	≥ 9 100	≥ 140
BRK01-135W-PC-40K7-27RE-BZ-A2	≥ 18 900	≥ 140



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com



LUNA Series

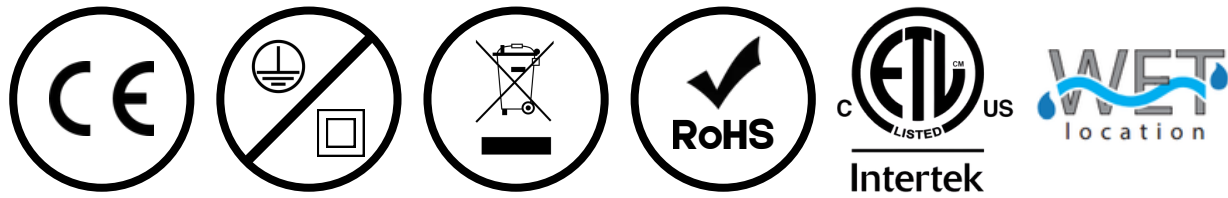

TECHNICAL INFORMATION:

Voltage Range	120 VAC 100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 600 lm
Efficiency	≥ 50 lm/W
Dimming	TRIAC Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall

DIMENSIONS:

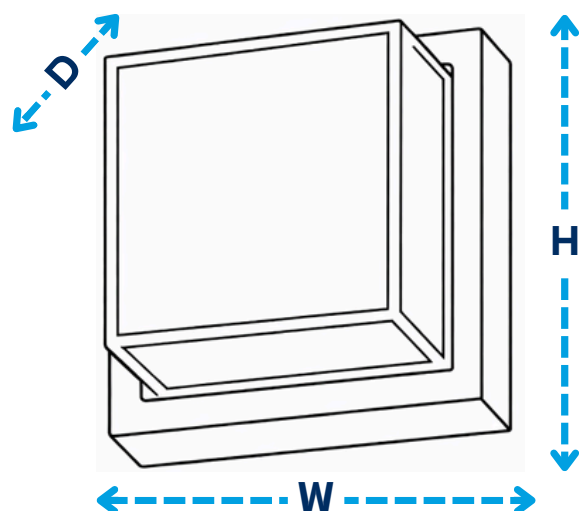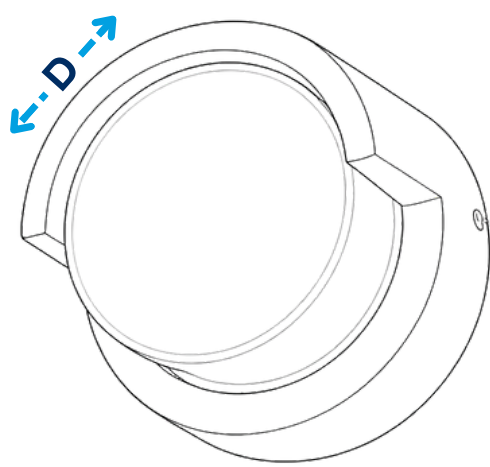

	Inches	MM
Ø	6.25"	158.75 mm
W	6.25"	158.75 mm
H	6.25"	158.75 mm
D	4"	101.60 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
LNR	12W	100D 100°	30K 3000K	8 80	12RE 120 VAC Dimmable TRIAC	N/A	W White
LNS					27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V		B Black
							S Silver
							** Other Options On Request

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
LNR-12W-100D-30K8-12RE-W	≥ 600	≥ 50
LNS-12W-100D-30K8-27RE-W	≥ 600	≥ 50



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com



SLITE Series

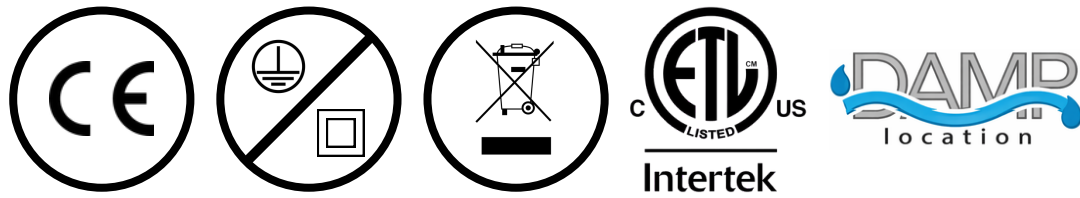

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 4300 lm ~ 5600 lm
Efficiency	≥ 125 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface Recessed

DIMENSIONS:

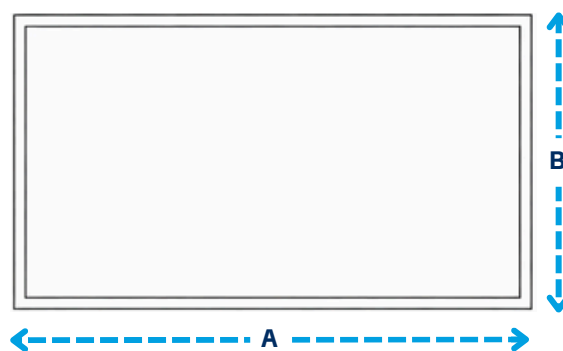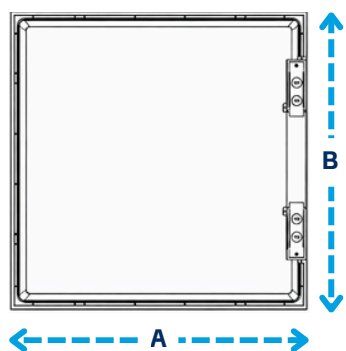

2' x 2'	A	B	C
Inches	23.43"	23.43"	1.50"
MM	595 mm	595 mm	38 mm

2' x 4'	A	B	C
Inches	47.24"	23.43"	1.50"
MM	1200 mm	595 mm	38 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
SL22 2'x2'	35W	120D 120°	35K 3500K	8 80	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
SL24 2'x4'	45W		40K 4000K		27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	** Other Options On Request
			50K 5000K				

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
SL22-35W-120D-35K8-27RE-W	≥ 4 375	≥ 125
SL24-45W-120D-50K8-27RE-W	≥ 5 600	≥ 125



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


TROFFER Series

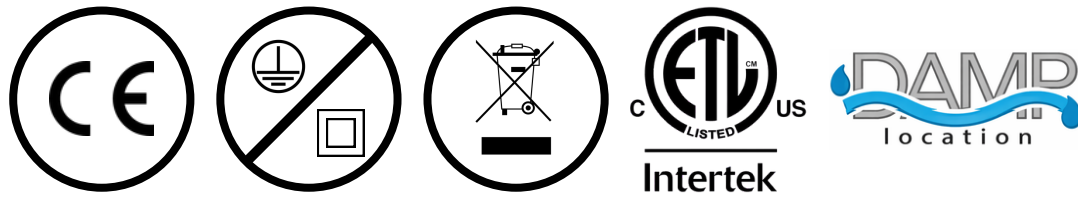

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 4300 lm ~ 5600 lm
Efficiency	≥ 125 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Surface Recessed

DIMENSIONS:

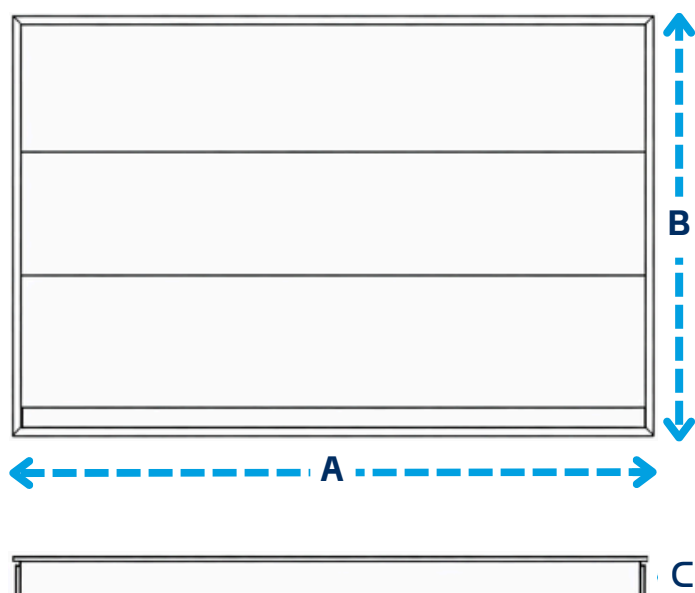

	Inches	MM
A	49.41"	1255.01 mm
B	25.59"	649.99 mm
C	5.91"	150.11 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
TF24	35W	120D 120°	40K 4000K	8 80	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
	45W		50K 5000K			SMK Surface Mount Kit	** Other Options On Request
						N/A	

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
TF24-40W-12D-40K8-27RE-W	≥ 5 600	≥ 125



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


TITAN Series

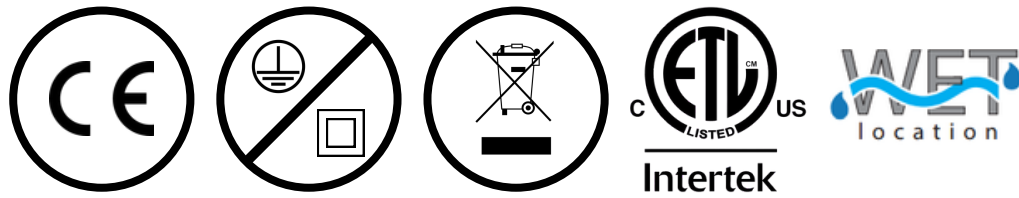

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 30000 lm
Efficiency	≥ 150 lm/W ~ 250 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Pendant

DIMENSIONS:

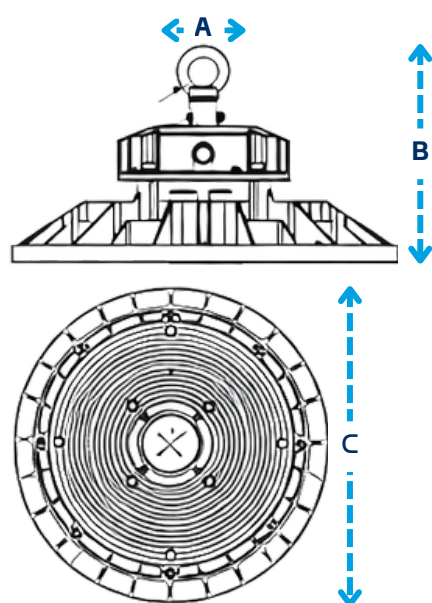

100W ~ 120W	A	B	C
Inches	Ø 0.98"	6.53"	Ø 9.84"
MM	Ø 24.89 mm	165.86 mm	Ø 249.94 mm

150W	A	B	C
Inches	Ø 0.98"	6.73"	Ø 10.27"
MM	Ø 24.89 mm	170.94 mm	Ø 260.86 mm

200W	A	B	C
Inches	Ø 0.98"	6.77"	Ø 11.85"
MM	Ø 24.89 mm	171.96 mm	Ø 300.99 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
TN1	120W	60D 60°	5CCT 27K ~ 50K	8 80	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	SE Sensor	B Black
	160W	90D 90°			27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	** Other Options On Request
	200W	120D 120°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
TN1-200W-60D-40K8-27RE-SE-B	≥ 30 000	≥ 150



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


MARKET Series

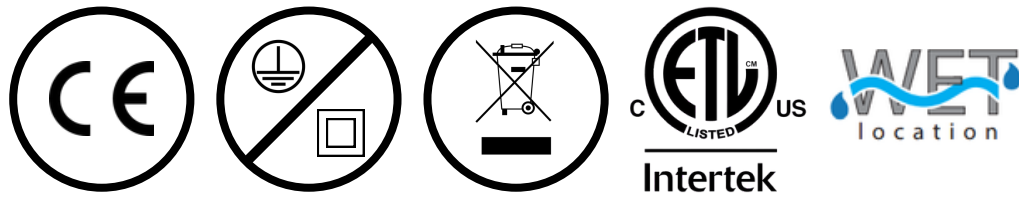

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.95
Luminous Flux	≥ 7000 lm ~ 21500 lm
Efficiency	≥ 140 lm/W ~ 145 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Pendant

DIMENSIONS:

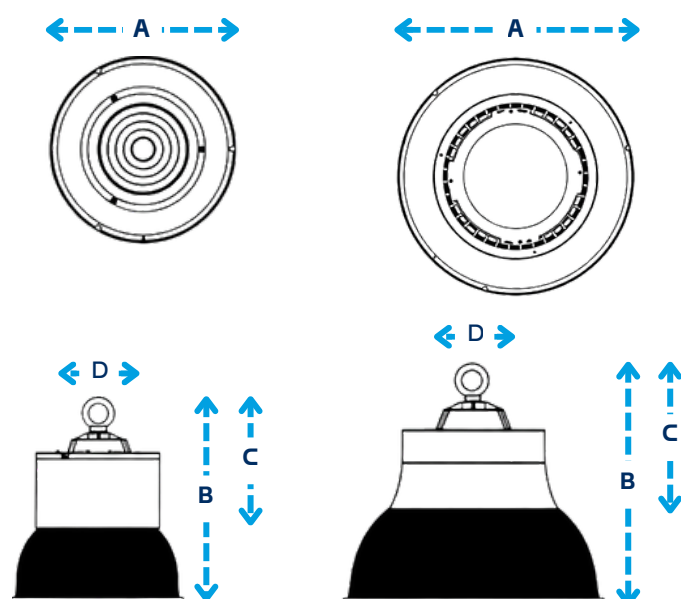

Series 1	A	B	C	D
Inches	Ø 10.94"	10.86"	6.61"	Ø 0.98"
MM	Ø 277.88 mm	275.84 mm	167.89 mm	Ø 24.89 mm
Series 2	A	B	C	D
Inches	Ø 16.57"	14.88"	8.38"	Ø 0.98"
MM	Ø 420.88 mm	377.95 mm	212.85 mm	Ø 24.89 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
MK1	50W	60D 60°	40K 4000K	8 80	27RE 100 ~ 277 VAC Dimmable. 0 ~ 10 V	EB Emergency Battery	W White
MK2	75W	90D 90°	50K 5000K			SE Sensor	** Other Options On Request
	100W	120D 120°				N/A	
	150W						

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
MK1-50W-60D-30K8-27RE-W	≥ 7 000	≥ 140
MK2-150W-120D-50K8-27RE-W	≥ 21 500	≥ 145



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127


St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com

BERLIN Series

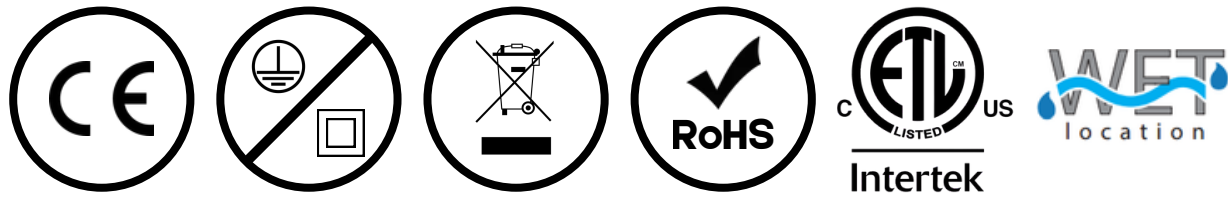

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 3500 lm ~ 15000 lm
Efficiency	≥ 70 lm/W ~ 100 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Base Bracket Clamp Ring Floor

DIMENSIONS:

	A	B	C		A	B	C	D
Inches	8.64"	12.99"	3.94"		17.72"	17.79"	6.30"	2.75"
MM	219.46 mm	329.95 mm	100.08 mm		450.09 mm	451.87 mm	160.02 mm	69.85 mm

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
BL01	35W	12D 12°	22K 2200K	8 80	27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	N/A	W White
	100W	30D 30°	30K 3000K				B Black
	150W	60D 60°	40K 4000K				G Grey
		20x60°					** Other Options On Request
		15x30°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
BL01-35W-12D-30K8-27RE-G	≥ 3 500	≥ 100
BL01-100W-30D-40K8-27RE-B	≥ 7 000	≥ 70
BL01-150W-60D-50K8-27RE-W	≥ 15 000	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú


Email:
info@moovillum.com

WASH Series




This fixture must be installed with this accessories:



CB: Ceiling Bracket (60mm, 120mm, 180mm)



Suspension Kit




L Bracket (100mm, 140mm, 180mm)

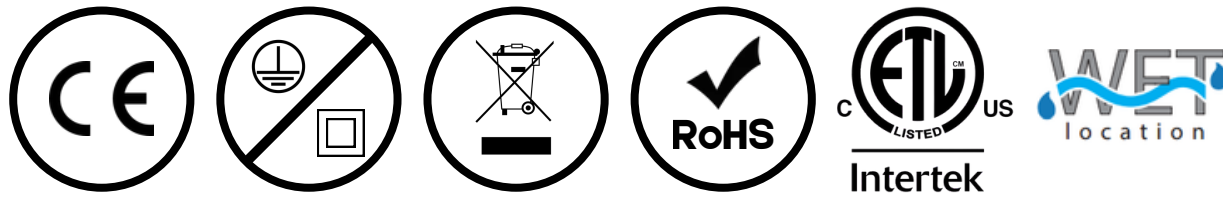

TECHNICAL INFORMATION:

Voltage Range	100 ~ 277 VAC
Power Factor	≥ 0.90
Luminous Flux	≥ 1800 lm ~ 3600 lm
Efficiency	≥ 100 lm/W
Dimming	Dimmable. 0 ~ 10 V
Lifetime	≥ 50 000 Hours
Mounting	Wall Surface Floor

DIMENSIONS:

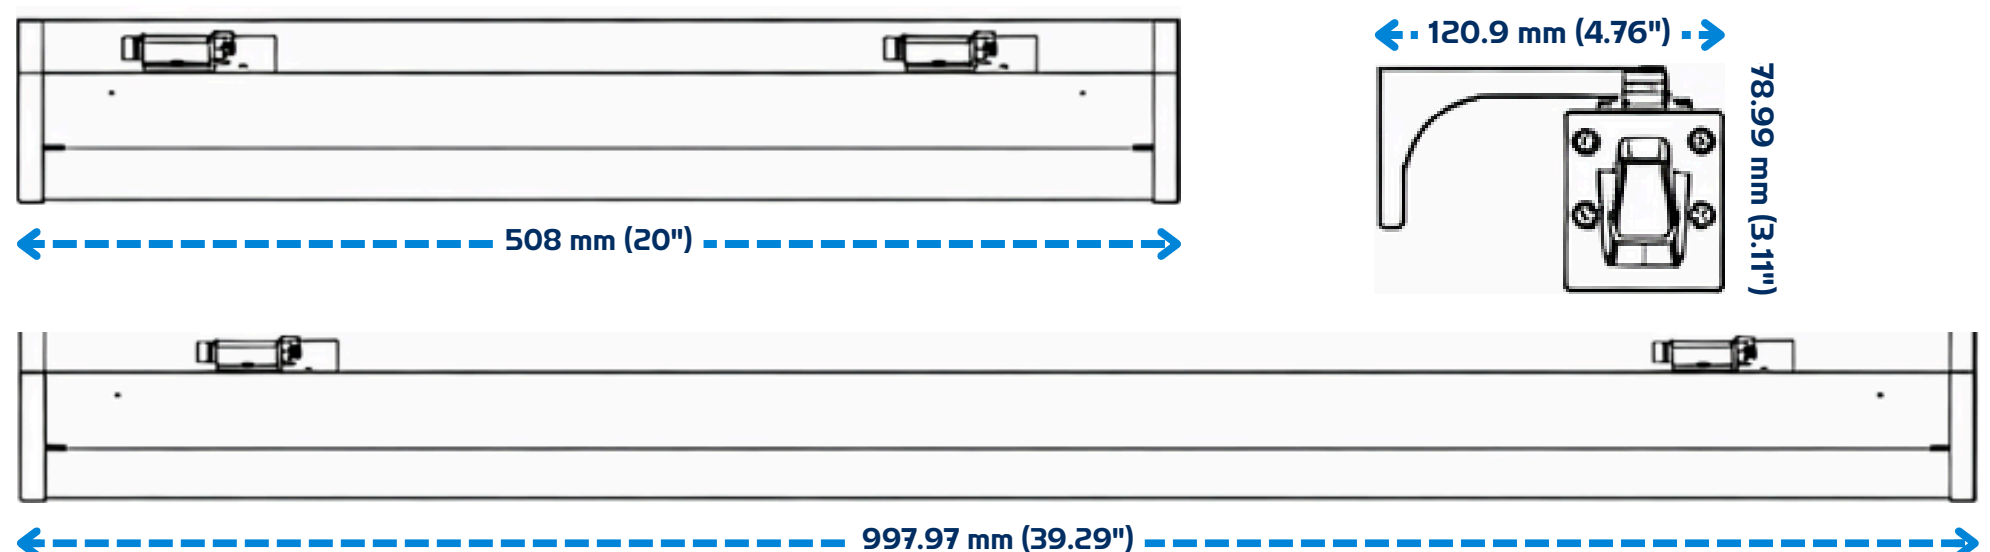

CONFIGURATION:

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	COLOR
WS1	18W	12D 12°	22K 2200K	7 70	27RE 120 ~ 277 VAC Dimmable. 0 ~ 10 V	CB Ceiling Bracket	G Grey
	36W	30D 30°	30K 3000K	8 80		LB L Bracket	** Other Options On Request
		60D 60°	40K 4000K	9 90		SK Suspension Kit	
		20x60°	50K 5000K			N/A	
		15x30°					

REFERENCES:

REFERENCES:	(XXK)	
	LUMENS	LM/W
WS1-18W-30D-40K7-27RE-G	≥ 1 800	≥ 100
WS1-36W-60D-50K9-27RE-G	≥ 3 600	≥ 100



Miami, USA:
300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg, USA:
360 Central Avenue Suite 800, FL 33701

Monterrey, MÉXICO:
Plaza 100 - L9 Av. Manuel Gómez Morín #100 Col. Carrizalejo San Pedro Garza García, N.L. 66254

Lima, PERÚ:
Avenida Republica De Colombia 643, ofic. 501, San Isidro, Lima, Perú

Email:
info@moovillum.com


MOV-NMT0606



TECHNICAL INFORMATION:

- **Light Source:** High luminous efficiency, LM80 proved.
- **Process & Material:** High light transmittance, environmental silicone material, IP65.
- **Optical Design:** Unique optical light distribution structure design, uniform lighting surface and no shadow.
- **Appearance Design:** Compared with the traditional neon tube or PVC guardrail tube, the silicone material has good flexibility, the simple and stylish appearance, which is exquisite and unique.
- **Environmental Features:** Resistance to saline solutions, acids & alkali, corrosive gases and UV.
- **Working | Storage Temperature:** Ta: -25°C ~ 55°C / 0°C ~ 60°C.
- **Application:** Furniture supporting lighting | Outdoor/indoor lighting | Indoor general lighting.
- **Warranty:** Indoor: 5 years warranty or working life =60000H, whichever comes first.
Outdoor: 3 years warranty or working life =36000H, whichever comes first.

DIMENSIONS:

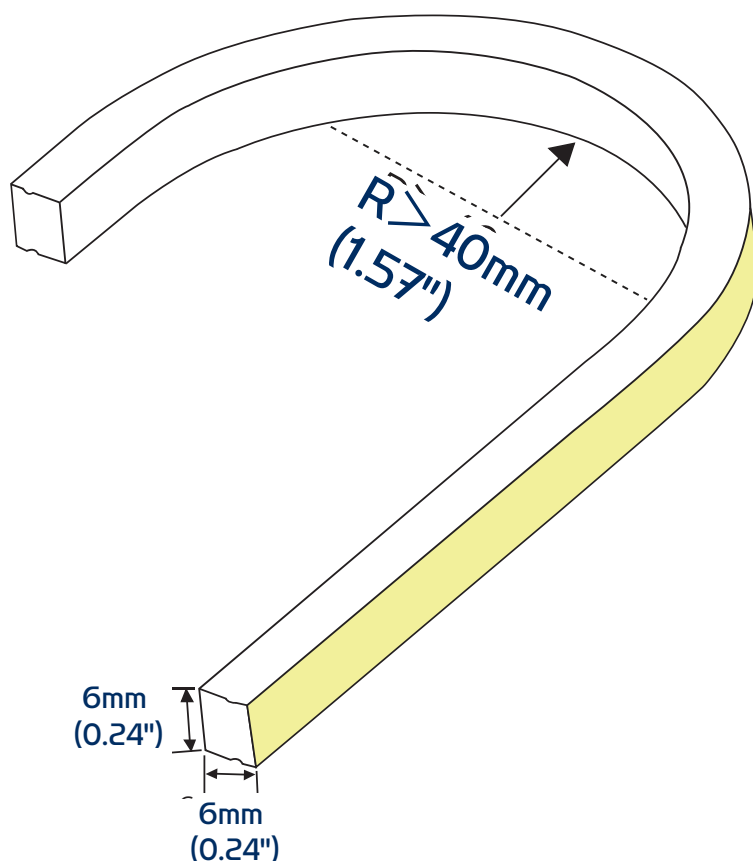



BASIC PARAMETERS

MODEL	CCT	CRI	INPUT VOLTAGE (V)	RATED CURRENT (A/M)	RATED POWER (W/M)	MAX POWER (W/M)	LUMENS (LM/M)	LENGHT	REMARK
NMT0606-9XX24CSN050CCXXXX	2300K	> 90	24	0.3 (0.09 A/ft)	7.2 (2.19 W/ft)	8.3 (2.53 W/ft)	350 (107 LM/ft)	5000mm (16.4 ft)	7LED/25mm
	2700K						400 (122 LM/ft)		
	3000K						400 (122 LM/ft)		
	4400K						440 (134 LM/ft)		


ACCESSORY INFORMATION

NAME	DESCRIPTION	IMAGE	SECTIONAL SIZE	ORDERING CODE	QUANTITY (PCS)	NET WEIGHT (KG)	GROSS WEIGHT (KG)
Aluminium Carrier	Flat Mounting Slot			AS-NTT0606A-1000	280	0.052	15.56
Aluminium Clip	Flat Mounting Clip			AS-NTT0606S-18	800	0.0011	1.03
End Cap Set	End Cap Set			AS-NTT0606GH0-EC	800	0.0009	1.02
Glue	588G Acidic Glue		-	AS-PG-0002	150	0.014	2.4
Wire	2P PVC Wire(0.5m)		-	AS-WS-0019	200	0.0077	1.84
	2P PVC Wire(2m)			AS-WS-0020	100	0.031	3.4
Connector	2PIN IP68 Waterproof Connector		-	AS-FC-0001	512	0.016	9.5

SOLUTION OF CONTROLL SYSTEM

PRODUCT IMAGE	PRODUCT NAME	PRODUCT NUMBER	ORDER CODE	PRODUCT SPECIFICATIONS	APPLICABLE PRODUCTS
	Monochrome Remote	CK1-GBA	402-02-000000-00001	<p>Output Signal: RF (2.4GHz)</p> <p>Working Voltage: 3VDC (CR2032)</p> <p>Remote Control Distance: 30m</p> <p>Working Temperature: Ta:0-30 °C-0+55 °C</p>	<p>Monochrome Light Strip</p> <p>Use with CR1-GBA</p>
	Monochrome Light Controller	CR1-GBA	402-01-000000-00001	<p>Input Voltage: 12-48VDC</p> <p>Output Current: 15A@12/24V-10A@36/48V</p> <p>Output Power: 180W@12V-360W@24V</p> <p>Output Power: 360W@36V-480W@48V</p> <p>Working Temperature: Ta:0-30 °C-0+55 °C</p>	<p>Monochrome Light Strip</p> <p>Use with CK1-GBA</p>


MOV-NMS1217

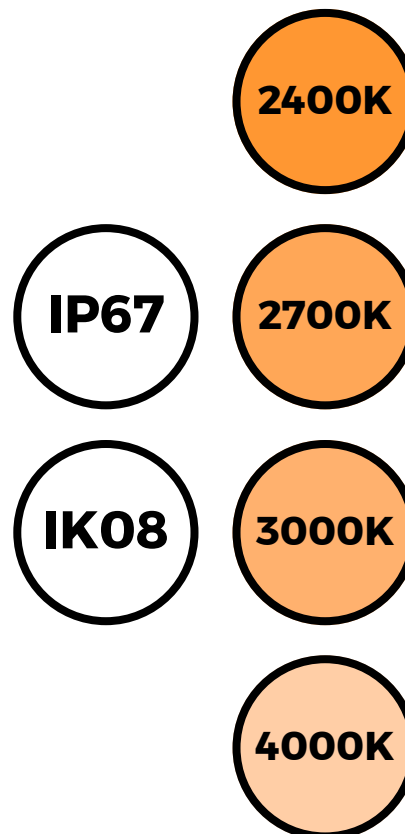

TECHNICAL INFORMATION:

- **Light Source:** High luminous efficiency LED lamp beads, LM80 test certification.
- **Process Material:** Three-color silicone extrusion technique is applied, Cutting mark more clear.
- **Optical Design:** Unique optical light distribution structure design, uniform light emission on the surface without shadows.
- **Appearance Design:** Standard ESD oil spray, anti-dust; good flexibility, simple shape, exquisite and unique.
- **SPI Chip Model And Pixel Count:** White Light/RGB: UCS1903H (12Pixels/m.)
- **DMX Chip Model And Pixel Count:** White Light/RGB: UCS512B3L (12Pixels/m.)
- **Product Certification:** UL | CE | ROHS | UKCA | CB
- **Environmental Characteristics:** Salt solution resistance, acid and alkali corrosion resistance, flame retardant resistance, UV resistance.

DIMENSIONS:

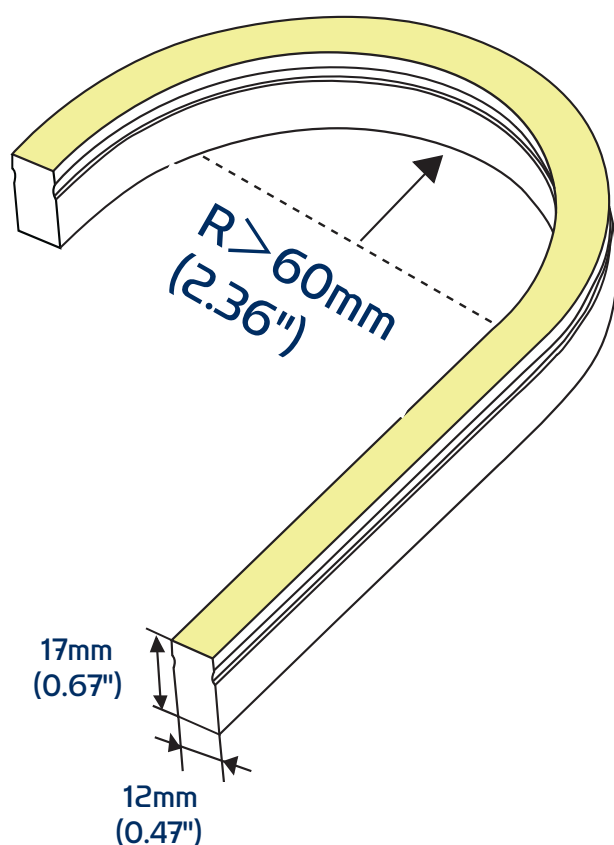

















BASIC PARAMETERS

MODEL	CCT	CRI	INPUT VOLTAGE (V)	RATED CURRENT (A/M)	RATED POWER (W/M)	MAX POWER (W/M)	LUMENS (LM/M)	LENGHT	REMARK
NMS1217- XXXX24 CXN050XCXXXX-PRO	2400K	> 90	24V	0.4 (0.12 A/ft)	9.6 (2.93 W/ft)	10.6 (3.23 W/ft)	400 (121 LM/ft)	5000mm (16.4 ft) 10000mm (32.8 ft)	7LED 50mm
	2700K						410 (125 LM/ft)		
	3000K						450 (137 LM/ft)		
	3500K						485 (147 LM/ft)		
	4000K						420 (128 LM/ft)		
NMS1217- 0X24 CXN050XCXXXX-PRO	G 525 ~ 535nm	-	24V	0.4 (0.12 A/ft)	9.6 (2.93 W/ft)	10.6 (3.23 W/ft)	-	5000mm (16.4 ft) 10000mm (32.8 ft)	7LED 50mm
	B 455 ~ 465nm								
NMS1217- 0RGB24 CXN050XC0500-PRO	RGB R 615 ~ 625nm G 520 ~ 530nm B 465 ~ 470nm	-	24V	0.5 (0.15 A/ft)	12 (3.66 W/ft)	13.2 (4.02 W/ft)	-	5000mm (16.4 ft)	7LED 83.33mm
NMS1217- 0RGBXX24 CXN050XC0500-PRO	RGB ~ 2700K	-	24V	0.6 (0.18 A/ft)	14.4 (4.39 W/ft)	16 (4.88W/ft)	-	5000mm (16.4 ft)	12LED 62.5mm
	RGB ~ 3000K								
	RGB ~ 3500K								
	RGB ~ 4000K								
	RGB ~ 5000K								
NMS1217- XXXXX24 CXN050XC0500-PRO	2400 ~ 4000K	> 90	-	0.5 (0.15 A/ft)	12 (3.66 W/ft)	13.2 (4.02W/ft)	520 (158/ft)	5000mm (16.4 ft)	14LED 100mm
NMS1217- 9XXX48 CSN050CC5000-PRO	2400K	> 90	48V	0.11 (0.03 A/ft)	5.3 (1.62 W/ft)	5.8 (1.77 W/ft)	200 (60/ft)	5000mm (16.4 ft)	12LED 100mm
	2700K						220 (65/ft)		
	3000K						220 (65/ft)		
	4000K						240 (70/ft)		

BASIC PARAMETERS

MODEL	CCT	CRI	INPUT VOLTAGE (V)	RATED CURRENT (A/M)	RATED POWER (W/M)	MAX POWER (W/M)	LUMENS (LM/M)	LENGHT	REMARK
NMS1217- 9XXX48 CSN050CC2000-PRO	2400K	> 90	48V	0.2 (0.06 A/ft)	9.6 (2.93W/ft)	10.6 (3.23 W/ft)	380 (115/ft)	20000mm (65.6ft)	12LED 100mm
	2700K						390 (118/ft)		
	3000K						390 (118/ft)		
	4000K						410 (125/ft)		
NMS1217- ORGB48 CSN050CC2000-PRO	RGB R 620 ~ 630nm G 525 ~ 530nm B 465 ~ 470nm	-	48V	0.2 (0.06 A/ft)	9.6 (2.93 W/ft)	10.6 (3.23 W/ft)	-	20000mm (65.6ft)	12LED 100mm
NMS1217- ORGBX48 CSN050CC2000-PRO	RGB ~ 2200K	-	48V	0.2 (0.06 A/ft)	9.6 (2.93 W/ft)	10.6 (3.23 W/ft)	-	20000mm (65.6ft)	24LED 125mm
	RGB ~ 2700K								
	RGB ~ 3000K								
	RGB ~ 3500K								
	RGB ~ 4000K								
	RGB ~ 5000K								
NMS1217- ORGBX24 CDS025CC0500-PRO-EP(SPI)	RGB R 620 ~ 630nm G 525 ~ 530nm B 465 ~ 470nm	-	24V	0.75 (0.23 A/ft)	18 (5.49 W/ft)	20.7 (6.31 W/ft)	-	5000mm (16.4ft)	7LED/83.33mm IC: (UCS1903H) 12Pixels/m
NMS1217- 8XXX24 CDS025CC0500-PRO-EP(SPI)	2100K	> 80	24V	0.75 (0.23 A/ft)	18 (5.49 W/ft)	20.7 (6.31 W/ft)	560 (170/ft)	5000mm (16.4ft)	7LED/83.33mm IC: (UCS1903H) 12Pixels/m
	2700K						680 (207/ft)		
	3000K						740 (225/ft)		
	4000K						650 (198/ft)		
NMS1217- ORGBM24 CDS025CC 0500-PRO-EP(DMX512)	RGB R 620 ~ 630nm G 525 ~ 530nm B 465 ~ 470nm	-	24V	0.75 (0.23 A/ft)	18 (5.49 W/ft)	20.7 (6.31 W/ft)	-	5000mm (16.4ft)	7LED/83.33mm IC: (UCS512B3) 12Pixels/m
NMS1217- 8XXM24 CDS025CC 0500-PRO-EP(DMX512)	2100K	> 80	24V	0.75 (0.23 A/ft)	18 (5.49 W/ft)	20.7 (6.31 W/ft)	560 (170/ft)	5000mm (16.4ft)	7LED/83.33mm IC: (UCS512B3) 12Pixels/m
	2700K						680 (207/ft)		
	3000K						740 (225/ft)		
	4000K						650 (198/ft)		

ACCESSORY INFORMATION

name	describe	Accessories Picture	Section size	Order model	quantity/ case (PCS)	net weight (kg)	Per box weight (kg)	Gross weight (kg)	Gross weight (mm)	Remark
Alumina carrier	Flat mounting aluminum groove			MOV-AS - NMS1217A-1000	60	0.1755	10.53	11.53	1180*125*115	size: L1000*W14.4*H18.85mm With screws
Aluminum clip	Flat mounting of clip			MOV-AS - NMS1217A-25	300	0.0044	2.01	2.16	250*250*150	size: L25*W14.4*H18.85mm With screws
Alumina carrier	Aluminum groove reserved outlet position			MOV-AS- NMS1217A1-1000	48	0.1755	8.424	9.5	1180*125*115	size: L1000*W14.4*H24.85mm With screws
Aluminum clip	Clip of reserved outlet position			MOV-AS - NMS1217A1-25	300	0.0044	2.01	2.16	250*250*150	size: L25*W14.4*H24.85mm With screws
Alumina carrier	Pre -installed aluminium groove			MOV-AS- NMS1217A2-1000	48	0.17	8.16	9.16	1180*125*115	size: L1000*W15.8*H21mm With screws, One meter with 5 clips Cannot be used upside down
PC carrier	Flat mounting PC groove			MOV-AS- NMS1217P-1000	60	0.08	4.8	5.8	1180*125*115	size: L1000*W14.6*H19.35mm With screws
PC carrier	Flat mounting of PC clip			MOV-AS- NMS1217P-25	350	0.004	1.505	1.655	250*250*150	size: L25*W14.6*H19.35mm With screws
Moldable carrier	/Moldable groovez			MOV-AS- NMS1217M1-500	66 (33*2)	0.046	5.5	6.4	500*290*290	size: L509*W13.1*H17.69mm With screws Cannot be used upside down

CONTACT

Miami, USA

300 NW 54 St 2nd Floor. Miami, FL 33127

St. Petersburg , USA

360 Central Avenue Suite 800, FL 33701

E-mail: alejandro@moovillum.com

Lima, PERÚ

Av Republica De Colombia 643, ofic. 501,

San Isidro, Lima, Perú

Ciudad de México, MÉXICO

Gómez Morin P100 - Lg Col. Carrizalejo,

San Pedro Garza García, N.L.,

México, 66254

Madrid, ESPAÑA

Calle Paseo de la Haban 18, 28036

Madrid, España

E-mail: info@moovillum.com

