


LUX Series



*This fixture must be installed with this accessories


EM Backup LED Driver

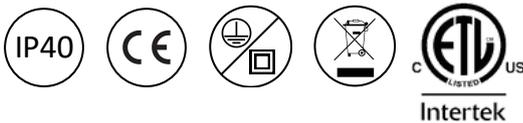

FEATURES

Voltage	120 VAC
Frequency range	50 - 60 Hz
Wattage	10W / 20W
Lumen Flux	800LM / 1600LM
Efficacy	80 lm/W
CRI	90
Warranty	5 years
Mounting	Recessed
Dimming	TRIAC / Dim 0-10V

DIMENSIONS

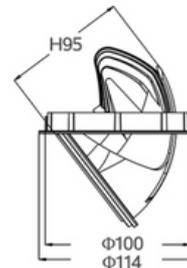

CONFIGURATION

MODEL	POWER	OPTICS	CCT	CRI	DRIVER	ACCESSORIES	RAL COLOR
LUX-4 Lux 4 inches Series	12W	15°	27K 2700K	9 90	12RE 120 VAC. Dimmable TRIAC	EM Emergency Battery	WW White & White
		24°	30K 3000K				BB Black & Black
		38°	40K 4000K				
		60°					

REFERENCES

References	4000K	
	Lumens	lm / w
LUX-4-12W-24D-30K9-12RE-WW	> 1000	>80